



Specifications for Project

Miami, FL 33101

KANN, TIZA

Salesperson

Alina Echavarri

Alina.Echavarri@fuseappliances.com



REMINDER:

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact our sales associate.

Miami, FL 33101

KANN, TIZA

Miami, FL 33101

(786) 301-7811

tizakann@me.com



Fuse Specialty Appliances

fuseappliances.com

Alina Echavarri

Builder Account Manager

305.433.6189

Quote **Q00098425**

Version 1.1

Tue, Apr 21, 2026

12:51 AM EDT



enterprise.steelcod.com/sp/fuse/64RE3KBP

<i>Contents</i>	<i>Page no.</i>
RVC 497 790 Gaggenau Refrigeration 36" Vario refrigerator, Fully integrated, panel ready, with fresh climate drawers and internal water dispenser	4-5
RVF 477 790 Gaggenau Refrigeration 30" Vario Freezer, Fully integrated, panel ready, with ice maker	6-7
DF 480 701F Gaggenau Dishwasher 400 Series Fully Integrated Push-to-open Backlit Variable Hinge Dishwasher - Tall tub	8-9
CX492612 Gaggenau Cooktop Full surface induction cooktop	10-11
GO 481 721 Gaggenau Wall Oven 30 Expressive Series Single Oven - Left Hinged	12

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

GM 481 720	13
-------------------	-----------

Gaggenau Wall Oven

30 Expressive Series Combi-microwave Oven

DA 2628	14-18
----------------	--------------

Miele Ventilation

46" DA 2628 Extra-Slim Insert Hood

SKU: 10876800

ID-24R	19-22
---------------	--------------

Sub-Zero Refrigeration

24" Designer Refrigerator Drawers - Panel Ready

DEU2450W/R	23-26
-------------------	--------------

Sub-Zero Refrigeration

24" Designer Undercounter Wine Storage - Panel Ready

HA15CI-W	27-29
-----------------	--------------

Perlick Refrigeration

15" ADA Height Compliant, Clear Ice Maker, Panel Ready Door

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.



Vario refrigerator Gaggenau Expressive series RVC 497

RVC 497 790

Fully integrated, panel ready, with fresh climate drawers and internal water dispenser. Door hinge right, reversible with RVA 466 900 accessory for door direction change. Cut out width 35 1/2" (90 cm). Cut out height 84" (213.4 cm).

Included accessories

- egg holder with lid.
- oak wood bottle supports.
- supply hose, 70 7/8" (1.8 m) with 1/4" female compression fitting.
- ethylene absorber starter kit.
- activated charcoal water filter.

Required accessories

RVA 460 000
Required accessory for Expressive series side-by-side installation.

RVA 466 900
Accessory for door direction change. For 35 3/16" (89.4 cm) wide RVC and RVF.

Installation accessories

RVA 421 924
Dark brushed stainless steel door panel with handle. For 35 3/16" (89.4 cm) wide appliances, panel thickness 3/4" (19 mm).

RVA 428 924
Dark brushed stainless steel door panel, handleless. For 35 3/16" (89.4 cm) wide appliances, panel thickness 3/4" (19 mm).

RA 425 110
Handle bar, stainless steel, long. With 3 mounts, length 44 1/2" (1131 mm), height 1 15/16" (49 mm), drilling distance between each mount 21 15/16" (554 mm).

RVA 423 141
Side trims used to conceal the gap between the appliance and adjacent cabinet. 1/8" (3 mm), 2 pieces.

RA 460 020
Connecting element for vertically split appliance fronts (for a flush front).

RVA 460 900

Accessory for replacing side-by-side installation in unmodified cut out. Required if an RVY 497, RVB 497, RVC 497 or RVF 497 (35 3/16" (89.4 cm) wide) is installed side-by-side into a cut out which was formerly housing a combination including an RY 492, RB 492 or RC 492 (35 3/4" (90.8 cm) wide).

RVA 460 910

Accessory for replacement in single unmodified cut out. Required if an RVY 497, RVB 497, RVC 497 or RVF 497 (35 3/16" (89.4 cm) wide) is replacing an RY 492, RB 492 or RC 492 (35 3/4" (90.8 cm) wide).

RVA 460 020

Accessory for side-by-side installation, backward compatible. Required if an appliance of the Vario cooling Expressive series is installed side-by-side with an appliance of the Vario cooling 400 series.

Optional accessories

RA 430 100
Storage container with transparent lid, anthracite.

Part No. 11031964
Egg holder insert (for use with RA 430 100).

RVA 438 040
Solid oak bottle support with magnetic connector.

RA 450 022
Activated charcoal water filter. For RVY, RVB and RVF.

Part No. 11049963
Water filter bypass for home water filtration system.

RVA 450 220
Replacement activated charcoal air filter, set of 2 pcs.

Part No. 17006999
Ethylene absorber. Starter kit. For placement in a fresh climate drawer.

Part No. 17007000
Ethylene absorber. Refill kit. For placement in a fresh climate drawer.

Highlights

- Dark brushed stainless steel interior, refined with solid anthracite aluminum elements.
- Warm white and glare-free LED lighting concept for optimal food presentation in all compartments.
- Opening assist for door with two options:
 - Push-to-open function for integration into handleless cabinet front
 - Pull-to-open function to facilitate opening the door using a handle
- Flat dark brushed stainless steel inner door.
- Flexible positioning of shelves and door racks through hidden rail system.
- The drawers in the RVC refrigerators and RVF freezers are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
- Professional freshness system with 2 fresh climate drawers and 1 chilled drawer.
- Internal water dispenser with water filter located on the left side above fresh climate drawers.
- Full touch TFT display.
- Home Connect®
- ENERGY STAR® certified.
- Sabbath mode certified by Star-K.
- Total volume: 21.8 cu.ft.

Operation

Opening assist for door. Cushioned door closing system. User guidance through light and display response to drawer interaction. Automatic brightness adjustment based on ambient illumination. Easily accessible full touch TFT display with clear text. Animated quick guides to assist appliance maintenance.

Technical features

Dynamic cold air distribution. Constant air purification by 2 activated charcoal air filters. Sabbath mode certified by Star-K. When sabbath mode is active, the appliance can only be opened using a handle. Open-door and malfunction alarm.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring. Personalization function for saving custom programs.

Cooling

Internal water dispenser with water filter located on the left side above fresh climate drawers. Professional freshness system. No-frost technology with fast cooling. Temperature adjustable from +36 °F to +46 °F (+2 °C to +8 °C). 2 aluminum-framed safety glass shelves, individually adjustable in height. 1 integrated safety glass shelf. Optimal food presentation with warm white and glare-free, hidden LED light bars (3000 K). Flexible positioning of door racks through hidden rail system. 3 height adjustable door racks, 1 of which is extra deep.

Fresh climate drawer

1 fresh climate drawer with temperature adjustable from -30 °F to +36 °F (-1 °C to +2 °C). 1 fresh climate drawer with temperature adjustable from -30 °F to +46 °F (-1 °C to +8 °C). Ideal storage conditions for different foods through dedicated programs (e.g. Fruit, Vegetables, Meat and Cold sensitive food). Individual adjustment of temperature and humidity. Extended food preservation with ethylene absorber. Indirect illumination, transparent front. Fully extendable, with cushioned closing system.

Chilled drawer

Temperature dependent on cooling compartment (always 3.5 °F to 5.5 °F (2 °C to 3 °C) lower). Indirect illumination, transparent front. Fully extendable, with cushioned closing system.

Consumption data

Energy consumption 362 kWh/year. Noise level 38 dB (A) re 1 pW.

Planning notes

Flat hinge. Door hinge right, reversible with RVA 466 900 accessory for door direction change. Door opening angle of 115°, fixable at 90°. Max. door panel weight 88 lbs. (40 kg).


Rating

Total rating 992 W/24 h. Total amps: 10 A. Connecting cable 118" (3.0 m), detachable. Potable water connection required. Electrical location 6" above ground in lower left corner of unit. Supply hose 70 7/8" (1.8 m) with 1/4" female compression fitting (standard ice maker connector). Water pressure 29 to 116 psi.



Available for delivery June 2026.

www.gaggenau.com/us
Revised: February 2026

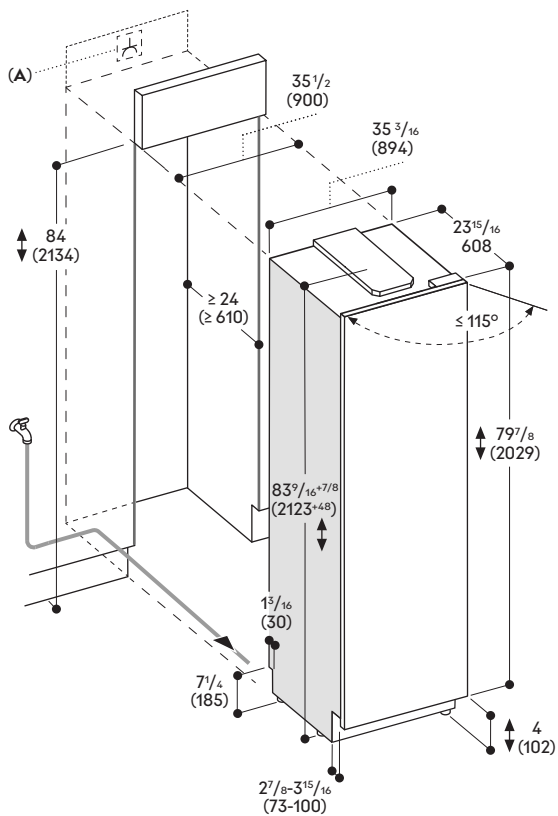

A: Electrical hook-up

The maximum door panel dimensions are based on a clearance of 1/8" (3 mm)
The height of the toe kick can be reduced to 2" (50 mm)



Vario freezer Gaggenau Expressive series RVF 477

RVF 477 790
Fully integrated, panel ready,
with ice maker.
Door hinge left, reversible, with
RVA 466 700 accessory for door
direction change.
Cut out width 30" (76.2 cm).
Cut out height 84" (213.4 cm).

Included accessories

- 1 ice cube scoop.
- 1 ice storage container.
- 1 supply hose, 70 7/8" (1.8 m) with 1/4" female compression fitting.
- 1 activated charcoal water filter.

Required accessories

RVA 460 000
Required accessory for Expressive
series side-by-side installation.

RVA 466 700
Accessory for door direction change.
For 30" (76.2 cm) wide RVC and RVF.

Installation accessories

RVA 421 722
Dark brushed stainless steel door
panel with handle.
For 30" (76.2 cm) wide appliances,
panel thickness 3/4" (19 mm).

RVA 428 722
Dark brushed stainless steel door
panel, handleless.
For 30" (76.2 cm) wide appliances,
panel thickness 3/4" (19 mm).

RA 425 110
Handle bar, stainless steel, long.
With 3 mounts, length 44 1/2" (1131 mm),
height 1 5/16" (49 mm), drilling distance
between each mount 21 13/16" (554 mm).

RVA 423 141
Side trims used to conceal the gap
between the appliance and adjacent
cabinet.
1/8" (3 mm), 2 pieces.

RA 460 020
Connecting element for vertically split
appliance fronts (for a flush front).

RVA 460 020
Accessory for side-by-side installation,
backward compatible.
Required if an appliance of the Vario
cooling Expressive series is installed
side-by-side with an appliance of the
Vario cooling 400 series.

Optional accessories

RA 450 022
Activated charcoal water filter.
For RVY, RVB and RVF.

Part No. 11049963
Water filter bypass for home water
filtration system.

Highlights

- Dark brushed stainless steel interior, refined with solid anthracite aluminum elements.
- Warm white and glare-free LED lighting concept for optimal food presentation in all compartments.
- Opening assist for door with two options:
 1. Push-to-open function for integration into handleless cabinet front
 2. Pull-to-open function to facilitate opening the door using a handle
- Flat dark brushed stainless steel inner door.
- Flexible positioning of shelves and door racks through hidden rail system.
- The drawers in the RVC refrigerators and RVF freezers are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
- Integrated ice maker with fixed water connection.
- Home Connect®
- Recognized as the Most Efficient of ENERGY STAR 2025.
- Sabbath mode certified by Star-K.
- Total volume: 18.2 cu.ft.

Operation

Opening assist for door.
Cushioned door closing system.
User guidance through light response to drawer interaction.
Automatic brightness adjustment based on ambient illumination.
Hidden touch display.

Technical features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Sabbath mode certified by Star-K. When sabbath mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

**Selected digital services
(Gaggenau Home Connect)**
Remote control and monitoring.

Freezing

No-frost technology with fast freezing at -22 °F (-30 °C).
4-star freezer compartment.
Temperature adjustable from -11 °F to 3 °F (-24 °C to -16 °C).
Freezer burn protection.
Oxidation protection.
Warm-white, glare-free LED lighting (3000 K).
2 aluminum-framed safety glass shelves, individually adjustable in height.
Flexible positioning of door racks through hidden rail system.
4 height-adjustable door racks.
3 fully extendable drawers, with cushioned closing system.

Ice maker

Hidden in one drawer for optimized usable space.
With fixed water connection (inlet).
Can be switched off.
Integrated, easily accessible ice cube scoop.
Ice cube production:
approx. 5 lbs. /24 h.
Removable ice storage container with approx. 6.5 lbs. capacity.
Particle filter for water inlet, integrated in ventilation grill area.
Saturation indicator shown in touch display.

Consumption data

Energy consumption 486 kWh/year.
Noise level 38 dB (A) re 1 pW.

Planning notes

Flat hinge.
Door hinge left, reversible, with RVA 466 700 accessory for door direction change.
Door opening angle of 115°, fixable at 90°. Max. door panel weight 86 lbs. (39 kg).
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 116 psi (8 bar), connect pressure relief valve between water tap and hose set.


Rating

Total rating 1,332 W/24 h.
Total amps: 10 A.
Connecting cable 118" (3.0 m), detachable.
Potable water connection required.
Electrical location 6" above ground in lower left corner of unit.
Supply hose 70 7/8" (1.8 m) with 1/4" female compression fitting (standard ice maker connector).
Water pressure 29 to 116 psi.



Available for delivery June 2026.

www.gaggenau.com/us
Revised: February 2026

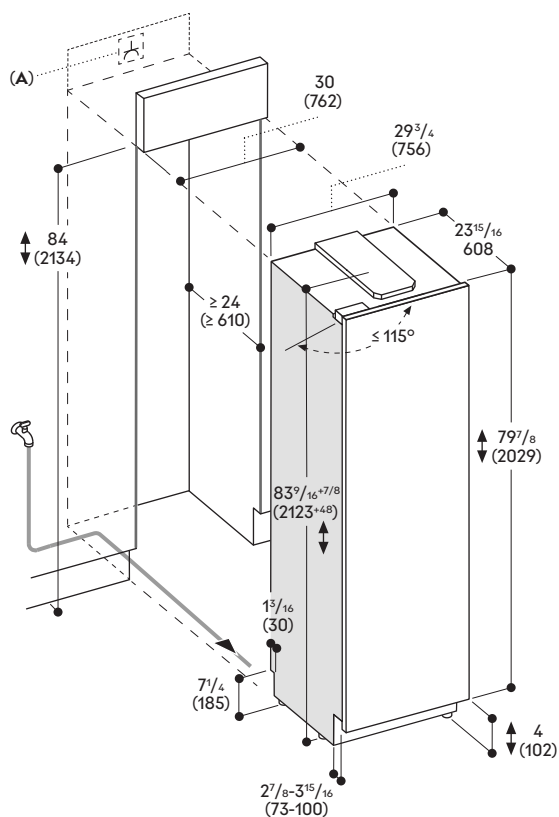

A: Electrical hook-up

The maximum door panel dimensions are based on a clearance of $\frac{1}{8}$ " (3 mm)
 The height of the toe kick can be reduced to 2" (50 mm)



DF480701F

Included accessories

- 1 x baking tray spray head
- 1 x GN container insert
- 1 x holder for long-stemmed glasses

Optional accessories

DA042030:

Silver polishing cassette

DA043000:

Holder for long-stemmed glasses

GZ010011:

inlet and outlet hose extension

installation accessories

GZ010011:

inlet and outlet hose extension

Dishwasher 400 series 24", Variable hinge for special installation situations

DF480701F

Optimal drying with zeolite and protection for sensitive glassware through elaborated basket design

8 programmes with aqua sensor and 4 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive Plus for adjusting cleaning areas in the lower basket

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket

Perfectly illuminated interior

Push-to-open function for perfect integration into handleless furniture fronts

Flexible hinge for reduced plinth height as of 50 mm or tall unit installation

Lateral Info-Light

Very quiet: 42 dB

Handling

TFT display indicating remaining or end time, refill for salt and rinsing agent, inflow of water.

Touch key operation.

Flexible cycle time reduction, even during an active cycle.

Personalisation function for saving individual combinations of programmes.

Information key with use indicators.

Sanitized indicator in the control panel.

Time delay up to 24 hours.

Visual and acoustic end of programme indicator.

Lateral Info-Light.

Technical features

Perfectly illuminated interior.

Glass protection with zeolite.

Aqua sensor.

Load sensor.

Detergent recognition.

Regeneration electronics.

Continuous flow heater.

Triple filter system.

Soft lock.

Aqua stop.

Selected digital services (Gaggenau Home Connect)

Programme assistant.

Temporary noise reduction.

Software updates.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Programmes

8 programmes:

Auto 150-160 °F.

Auto 127-140 °F.

Auto 113-122 °F.

Eco 113-136 °F.

Wash and Dry.

Quick Wash 113 °F (30 min).

Glass Care 122 °F.

Personalisation function (default setting:

Pre-rinse).

4 options:

Intensive Plus.

Power.

Sanitize.

Extra Dry with zeolite.

Machine Care.

Interior

Flexible basket system with smooth running rails on all levels and cushioned closing of the upper and lower basket.

Cutlery drawer.

Upper basket:

Over extension.

Rackmatic with 3 levels, adjustable in height up to 5 cm.

6 folding spines.

4 folding racks for optimal protection of glass.

Lower basket:

Motorised spray arm.

8 folding spines.

2 folding racks for optimal protection of glass.

Dividable glass support.

Cutlery basket.

Holder for long-stemmed glasses.

Maximum dish sizes (upper/lower basket)

21/26, 18.5/28.5 or 16/31 cm respectively.

13 place setting capacity.

Maximum glass loading capacity 23 wine glasses.

Consumption data

ENERGY STAR certified.

Total annual energy consumption 240 kWh.

Total annual water consumption 505 gallons.

Noise level 42 dB (re 1 pW).

Planning notes

Height-adjustable feet.

Appliance plinth recess 100 mm (see drawing).

Rear feet adjustable at front.

Door weight up to 11 kg.

Door panel dimension dependent on plinth height of kitchen furniture.

Installation and usage also with furniture handle possible. The push-to-open function remains active.

Connection

Total connected load 1440 W.

Connecting cable pluggable.

Water connection with 3/4" screw joint.


Connection to hot or cold water possible.

Power consumption standby/network 2.0 W.

Time auto-standby/network 2 min.


Please check the user manual for how to switch off the WiFi module.

Dishwasher (32³/₁₆" (817)) with flexible hinge

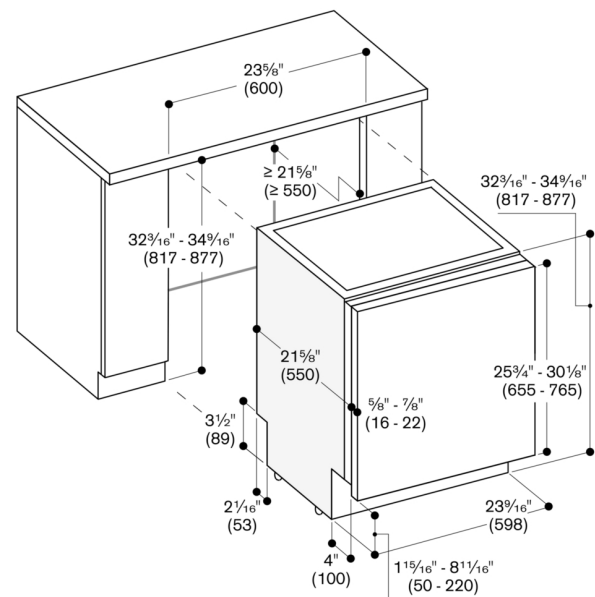

measurements in inches (mm)

Connection dimensions for a 24" (600 mm) wide dishwasher

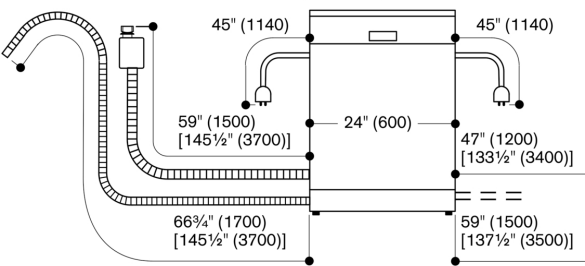

[] values with extension kit
measurements in inches (mm)



CX492612

Optional accessories

CA051300:

Teppan Yaki (large)

CA060600:

Wireless temperature sensor for cooktop

GN232110:

Teppan Yaki GN 1/1

installation accessories

VA420004:

Connecting strip Serie 400, flush, short

Full surface induction cooktop 400 series 36"

CX492612

One single big cooking surface

Free positioning of cookware

All sizes and formats of cookware can be used

TFT touch display for an intuitive control of all functions

Cooking sensor function for temperature control in pots

Professional cooking functions

Max. power output for big cookware of up to 5.5 KW

Precision crafted 3 mm stainless steel

For surface mounting with a visible edge or for flush mounting

Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

One unique cooking surface of 3200 cm².

Up to 6 items of cookware can be placed simultaneously on the cooktop.

Handling

Easy to use colour graphic TFT touch display with use indications.

Electronic power control in 17 output levels.

Features

Cooking sensor function.

Professional cooking function.

Dynamic cooking function.

Teppan Yaki function.

Booster function for pots.

Booster function for pans.

Keep warm function.

Individual pot detection.

Stopwatch.

Short-term timer.

Information key with use indicators.

Power management.

Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).

Remote monitoring.

Remote diagnostics.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Main switch.

Residual heat indication.

Child lock.

Safety shut-off.

Pause function.

Planning notes

Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut-out must be observed.

If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.

The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

Additional instructions for flush mounting:

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

The wok pan WP 400 001 cannot be used with this appliance.

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 35 kg.

Connection


Total connected load 6.2 KW.

Total Amps: 30 A.


208 - 240 V / 60 Hz.

Connecting cable 0.96 m without plug.

Please check the user manual for how to switch off the WiFi module.

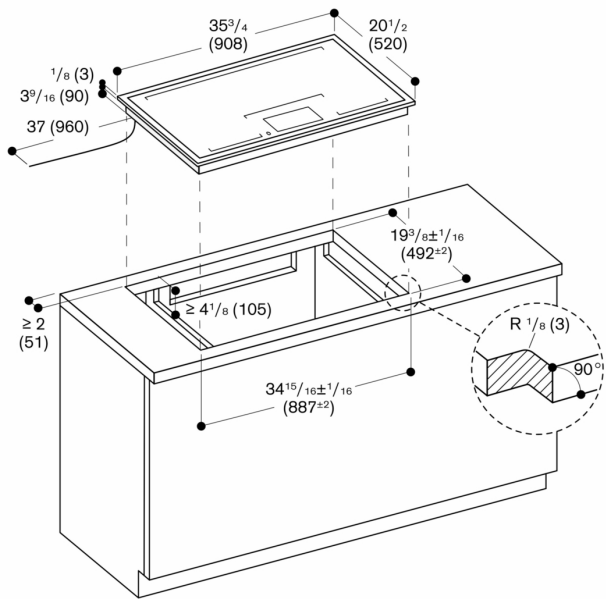


Measurements in inches (mm)

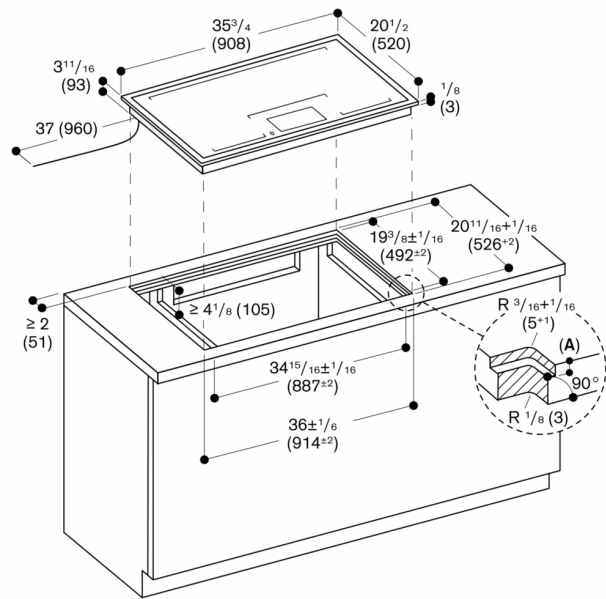

A: 1/8" (3.5^{0.5} mm)

Measurements in inches (mm)


Longitudinal section

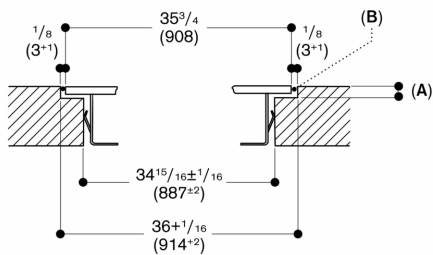

A: 1/8" (3.5^{0.5} mm)
B: Fill with silicone

Measurements in inches (mm)


Cross section

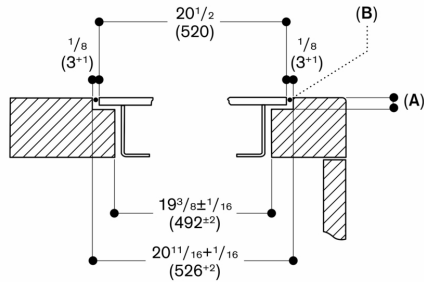

A: 1/8" (3.5^{0.5} mm)
B: Fill with silicone

Measurements in inches (mm)

View from above

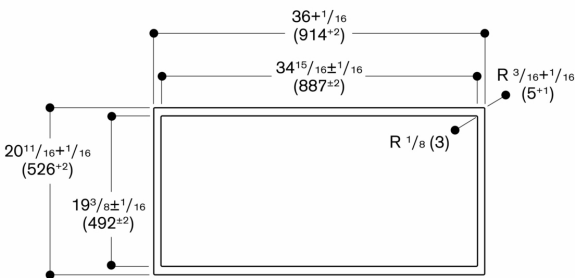

Measurements in inches (mm)



Oven Gaggenau Expressive series GO 480/GO 481

Right-hinged

GO 480 721

Stainless steel behind smoked glass.
Width 30" (76 cm).

Left-hinged

GO 481 721

Stainless steel behind smoked glass.
Width 30" (76 cm).

Included accessories

- 1 wire rack.
- 1 baking tray, enameled, pyrolysis-safe.
- 1 broil pan, enameled, pyrolysis-safe with wire rack.
- 1 plug-in core temperature probe.
- 1 rotisserie spit.

Optional accessories

BA 020 110

Air frying tray.
To be placed on wire rack.

BA 028 115

Baking tray, enameled.
1" (30 mm) deep.

BA 038 165

Wire rack, chromium-plated.
Without opening, with feet.

BA 058 134

Baking stone.
Incl. baking stone support and baking paddle.
Not in combination with pull-out system.

BS 020 003

Baking paddle.
Serving and cutting board.

GN 340 231

Gastronorm roaster in cast aluminum
GN 2/3, height 6 1/2" (165 mm),
PFAS free non-stick coating.
Lower and upper part can also be
used as separate ovenproof dishes,
3 15/16" (100 mm) and 2 9/16" (65 mm) deep.

Highlights

- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user detection.
- Pyrolytic self-cleaning.
- Invisible full surface broiler behind enamel.
- 19 heating methods from 85 °F to 570 °F, incl. baking stone function, roaster function, air frying, dehydrating.
- Automatic programs and setting recommendations.
- Core temperature probe.
- Rotisserie function.
- Oven cavity size 4.3 cu.ft. (125 liters).

Heating methods / Programs

Convection plus.
Economy convection.
Top + bottom heat.
Top + 1/3 bottom heat.
Top heat.
Bottom + 1/3 top heat.
Bottom heat.
Convection + bottom heat.
Convection + 1/3 bottom heat.
Moist baking.
Broil + circulated air.
Broil.
Baking stone function.
Roaster function.
Air frying.
Dehydrating.
Dough proofing.
Keeping warm.
Defrosting.
160 programs
(automatic programs and setting recommendations).
Option to save up to 30 favorites.

Operation

Soft-close side-opening door with 110° opening angle.
Electronic door opening.
Full touch display with control ring.
42 display languages available.
User detection, adjustable distance.
Information key with use indicators.
Animated quick guides to assist appliance operation.

Features

Invisible full surface broiler behind enamel 4,500 W.
Broil can be added briefly for additional browning.
Convection fan rotates in both directions for ideal heat distribution.
Extra powerful bottom heating for baking stone and roaster function.
Three-point core temperature probe with cooking time estimation via Home Connect®.
Rotisserie spit for broiling from all sides.
Precise temperature control with display of the current temperature.
Rapid pre-heating.
Heated catalyser to clean the oven air.
Timer functions: cooking time, cooking time end, count-up timer.
Long-term timer.
Programmable automatic door opening at cooking time end to avoid overcooking.
Optimum visibility of the food thanks to side lighting.
5 rack levels.

Selected digital services

(Gaggenau Home Connect®)

Remote control and monitoring.
Cooking time estimation when using the core temperature probe.
Door opening via voice assistant.

Safety

Child lock to prevent accidental switch on or operation of the appliance.
Electronic door lock to prevent unintentional opening of the appliance door.
Safety shut-off.
Thermally insulated door with quintuple glazing.
Cooled housing with temperature protection.

Cleaning


Pyrolysis system with minimized odor development thanks to the heated catalyzer.
Side rack supports enameled and pyrolysis-safe.
Seamless cooking compartment without obstructive elements.

Planning notes

Plan the cutout without back wall.
Door hinge not reversible.
Protrusion from appliance front to cabinet 1 5/8" (42 mm).
Consider the overhang when planning to open drawers next to the appliance.
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.
Door opening angle appr. 110° (delivery status) can be reduced to appr. 97° if required.
For installation underneath cooktops: distance between the underside of the cooktop and the top edge of the oven cavity: min. 9/16" (15 mm).
The planning notes for the cooktops (particularly regarding ventilation, gas/electric connection) must be taken into account.
The electrical box must be accessible and located outside the built-in cutout.

Rating

Total rating: 4,041 W (208 V);
5,380 W (240 V).
Total amps: 22.4 A.
Minimum fuse protection: 30 A, double-pole breaker.
120/208 – 240 V, 60 Hz, 4-wire.
Plan for a 67" connecting cable (hardwire required).
Home Connect® functionality via WiFi.

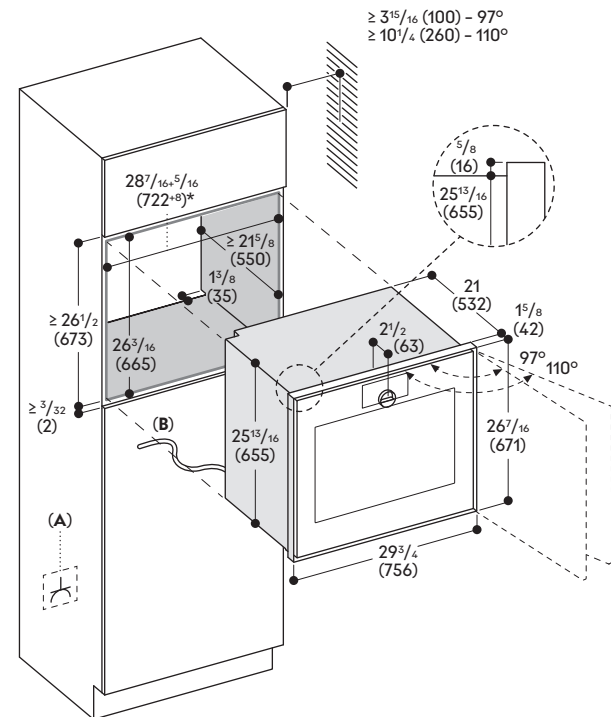

A: Accessible electrical connection

B: Fixed cable

* The width tolerance as shown in the drawing indicated by the + 5/16" (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8" – 13/16" (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.



Combi-microwave oven
Gaggenau Expressive series
GM 480/GM 481

Right-hinged

GM 480 720

Stainless steel behind smoked glass.
 Width 30" (76 cm).

Left-hinged

GM 481 720

Stainless steel behind smoked glass.
 Width 30" (76 cm).

Included accessories

- 1 wire rack.
- 1 glass tray.

Connection

Total rating: 2,300 W (208 V);

2,900 W (240 V).

Total amps: 12.1 A.


Minimum fuse protection: 15 A,

double-pole breaker.

120/208 - 240 V, 60 Hz, 4-wire.

Plan for a 59" connecting cable
 (hardwire required).

Home Connect® functionality via WiFi.

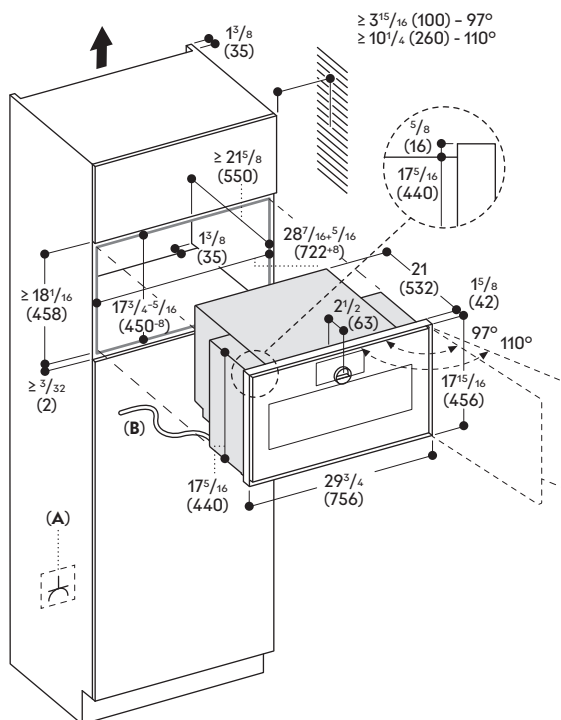

A: Accessible electrical connection
B: Fixed cable

Numbers indicated
 inside parenthesis () = mm

www.gaggenau.com/us
 Revised: March 2025

Miele

46" Extra-Slim Insert Hood

DA 2628 Stainless Steel



Shown: DA 2628 in Stainless Steel
Please note: This information is subject to change

 mieleusa.com
Specification Sheets TRS 09112018

46" Extra-Slim Insert Hood

SPECIFICATIONS	
Overall Unit Dimensions	46 ⁷ / ₁₆ " (1180 mm) W x 13 ¹ / ₂ " (342 mm) H x 11 ¹ / ₂ " (293 mm) D
Built-In	
Minimum Opening Dimensions	45 ⁷ / ₈ " (1165 mm) W x 12 ⁵ / ₈ " (320 mm) H x 10 ⁷ / ₈ " (276 mm) D
Fan	
Fan Speeds	4
Maximum CFM	625 CFM, (Reducing Collar is available to reduce Air flow to less than 400 CFM)
Duct	
Recommended Duct Diameter	6" (150 mm)
Electrical	
Electrical Requirements	120V, 60Hz, 15A
Power Cord	Molded NEMA 5-15 plug, 2.5 ft (0.75 m)
Shipping	
Shipping Weight	33 lbs (15 kg)
Shipping Dimensions	49 ⁵ / ₈ " W x 16" H x 18 ¹ / ₈ " D
Optional Accessories	
CFM Reducing Collar	R2000
Support	
Call Miele	(800) 999-1360
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com




DA 2628
Item 28262855USA


46" Extra-Slim Insert Hood

INSTALLATION SPECIFICATIONS

Product Details

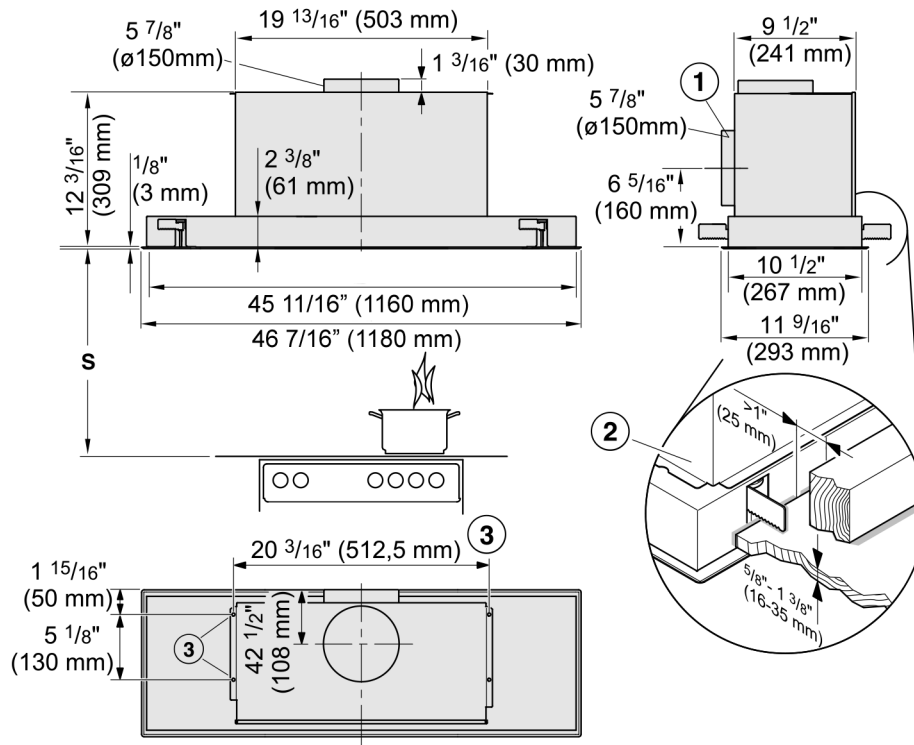

Niche/Cutout Details

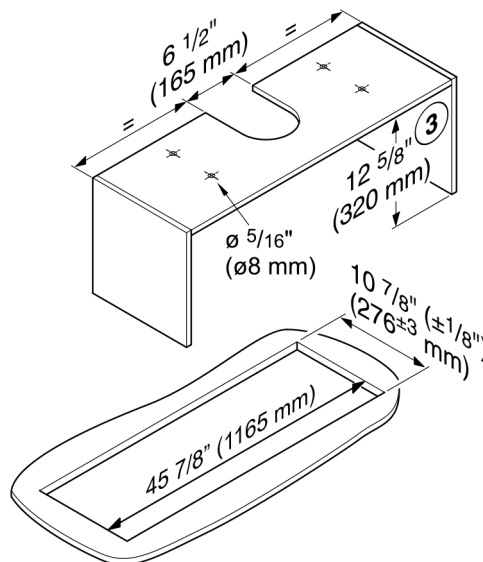

- ① The ducting can also be connected at the back.
- ② The ventilation hood is secured in the cut-out by clamps. This requires that the installation surface is made of a solid material, such as wood. Make sure that the material is strong enough to bear the weight of the ventilation hood and the edge extraction panel. There must be a minimum distance of 1" (25 mm) between the areas around the clamps and any structures or components, such as struts or cables.
- ③ Alternatively, the ventilation hood can be secured to four fixing points on an interim shelf.

46" Extra-Slim Insert Hood

INSTALLATION SPECIFICATIONS

Distance Between Cooktop and
Ventilation Hood (S)


Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood.

Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.

Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	

46" Extra-Slim Insert Hood

R2000
(optional accessory)

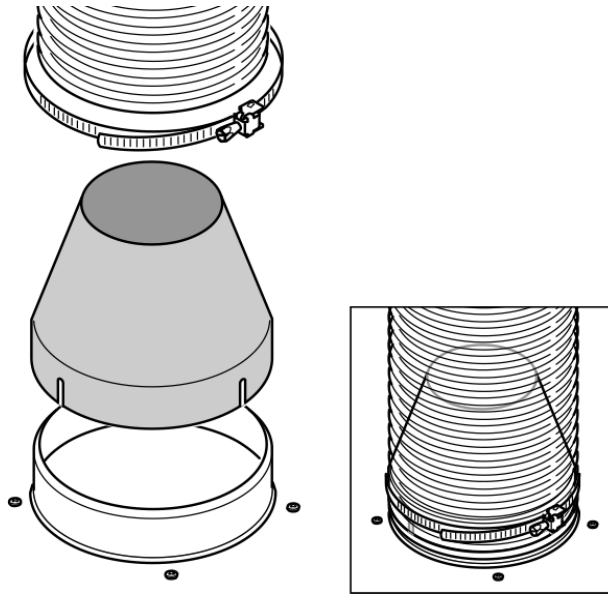

If you would like to reduce the environmental impact of your ventilation system by limiting the CFM output the Reducing Collar can be installed. It reduces the air flow to less than 400 CFM. Check local building codes for maximum CFM requirements.

ID-24R



FEATURES

- Open and close doors silently with soft-close technology
- Accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to match other Sub-Zero, Wolf, and Cove products*
- Controls temperature within one degree of setpoint
- Assure maximum freshness with low-temp, high-humidity crisper and deli drawers
- Locks in cold air to ensure freshness with magnetic door seals
- Control brightness with soft-on LED lighting


ACCESSORIES

- Dual Installation Kit
- Egg Container
- Reduced Toekick Divider
- Stainless Steel Pro Handles
- Stainless Steel Tubular Handles
- Stainless Steel Drawer Panels With Pro Handles - 4" Toe Kick
- Stainless Steel Drawer Panels With Tubular Handles - 4" Toe Kick
- Stainless Steel Dual Installation Kickplates

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

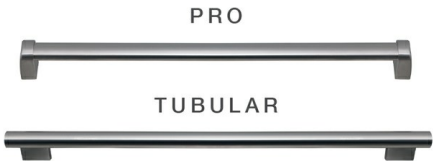

PRODUCT DETAILS


REFRIGERATOR

- Adjustable drawer dividers
- LED lighting

PRODUCT SPECIFICATIONS

Model	ID-24R
Dimensions	24"W x 34 1/2"H x 24"D
Refrigerator Capacity	4 cu. ft.
Weight	185 lbs
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit

ELECTRICAL




NOTE: The electrical outlet must be positioned with the grounding prong to the right of the thinner blades.

PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.


NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW


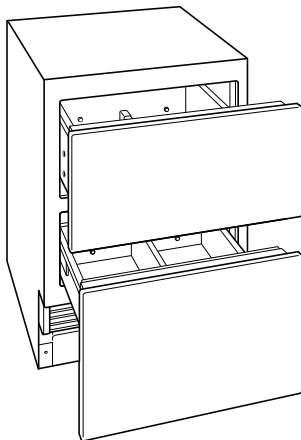


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

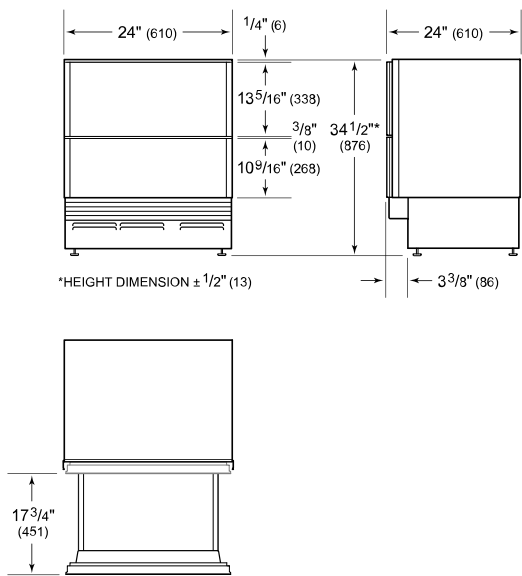


STANDARD INSTALLATION

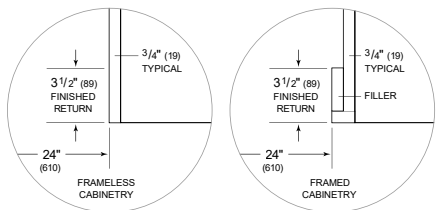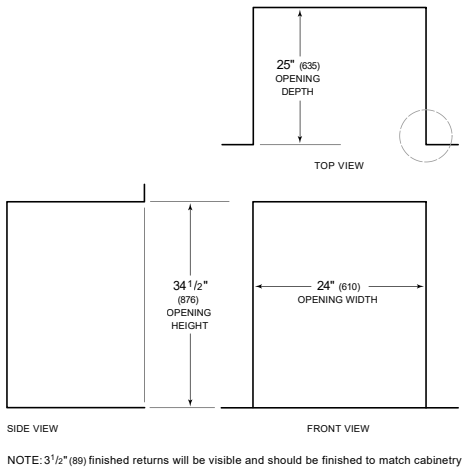

Panel Specifications

Single Model: ID-24R

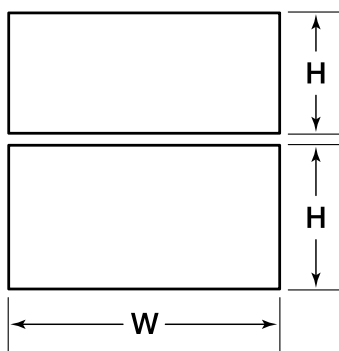

PANEL	WIDTH	HEIGHT	MIN THICKNESS	MAX WEIGHT
Drawer (Upper)	23 $\frac{3}{4}$ "	13 $\frac{9}{16}$ "	$\frac{5}{8}$ "	15 lbs
Drawer (Lower)	23 $\frac{3}{4}$ "	16 $\frac{11}{16}$ "	$\frac{5}{8}$ "	15 lbs

PLEASE NOTE: Panel specs change slightly when units are combined. Visit <http://www.subzero-wolf.com/trade-resources/reveal> for exact dimensions.

Panel Planning Notes

Single Model: ID-24R

Designer models require custom drawer panels and handle hardware. D-style handles are recommended. Drawer handles must be located near the top edge of each panel.

The thickness of the custom panel can vary. A minimum 5/8" (16) thick panel is required, but the thickness can be increased provided it does not exceed the weight limit.

The depth of each designer model is 24" (610). Allow for panel thickness when planning the finished opening depth.

Finish all sides of custom panels. They will be visible when the door/drawer is open.

Typical panel dimensions are based on a 34 1/2" (876) for drawer models and 1/8" (3) reveals. Panel dimensions must be adjusted accordingly for all other installations.

Stainless steel tubular and pro handles are available through an authorized Sub-Zero dealer.

Minimum Panel Thickness


5/8"

Standard Handle Lengths (Optional)

HANDLE	TUBULAR	PRO
ID-24R Drawer	21 1/4"	19 1/2"

Toe Kick Clearance

The height of the toe kick area can extend beyond the typical toe kick height, provided it does not exceed the dimensions in the illustration below. Toe kick heights from 2" (51) to 3 7/8" (98) require a reduced toe kick accessory available through an authorized Sub-Zero dealer.

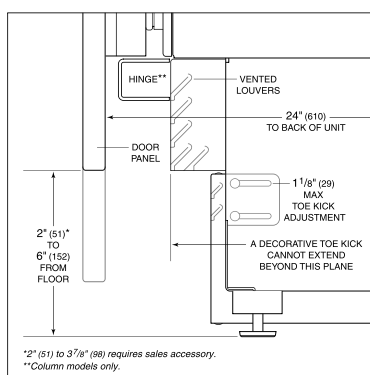

Toe kick (side view).

DEU2450W



FEATURES

- Fully customizable exterior—accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to coordinate with other Sub-Zero, Wolf, and Cove appliances
- Seamlessly integrating anywhere, undercounter wine storage adds comfort to your master suite, creates a corner for libations in the study—the options are endless
- 42-bottle capacity
- Intuitive, touch control panel provides ergonomic, convenient access to settings
- Store reds and whites in separate temperature zones that keep wines at proper serving temperatures, within one degree of setpoint
- Full-extension wine racks provide easy access to standard-size bottles, half bottles, and magnums without agitating others
- Dual evaporators maintain constant, moderate humidity so corks do not dry out
- UV-resistant glass door shields wine from harmful light
- Soft-on LED lighting fully illuminates the interior when the door is open and can be adjusted to four unique stand-by accent lighting settings
- Inventory tile system aids collection organization
- Control your appliance from wherever you are using our convenient Owner's App—remotely control independent temperature zones, be notified of a door left ajar, or receive remote service diagnostics
- ACCESSORIES
- 60" Stainless Steel Kickplate
- Custom Panel Lock Kit
- Dual Install Kit - Handle-to-Drawer
- Dual Install Kit - Handle-to-Handle
- Pro Handle
- Stainless Steel Dual Wide Kickplate
- Tubular Handle
- Wine Inventory Tiles
- Wine Inventory Tiles - Writable
- Stainless Steel Glass Door Panels
- Undercounter Solid Overlay Door
- Stainless Steel Dual Kickplates

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

PRO




TUBULAR



PRODUCT SPECIFICATIONS

Model	DEU2450W
Dimensions	24"W x 34 1/2"H x 23 1/8"D
Weight	176 lbs
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Wine Storage Capacity	42 Bottles

ELECTRICAL




NOTE: The electrical outlet must be positioned with the grounding prong to the right of the thinner blades.

PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.


NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

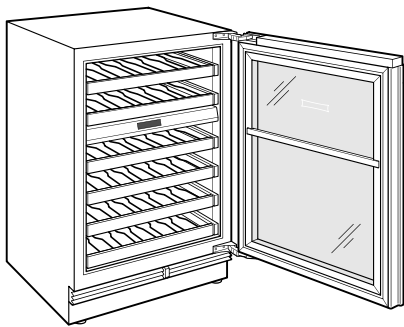


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


DIMENSIONS

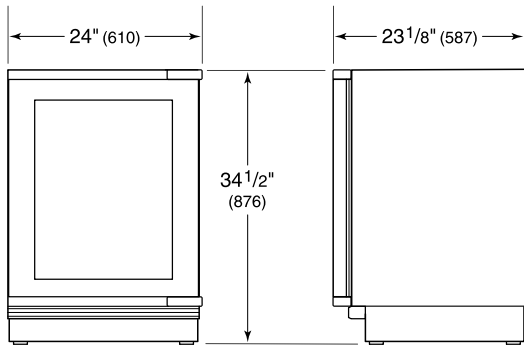


HEIGHT DIMENSIONS $\pm 1/2"$ (13)

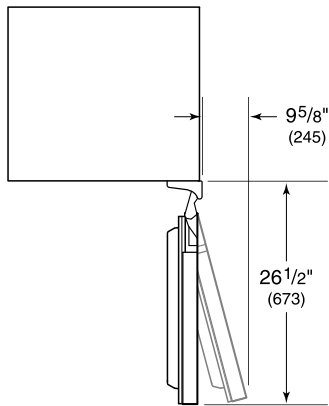

STANDARD INSTALLATION

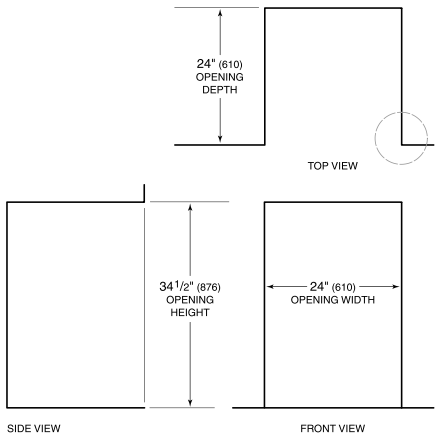


NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry.

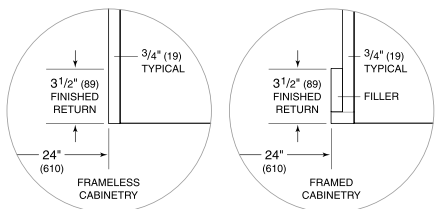

Panel Specifications

Single Model: DEU2450W

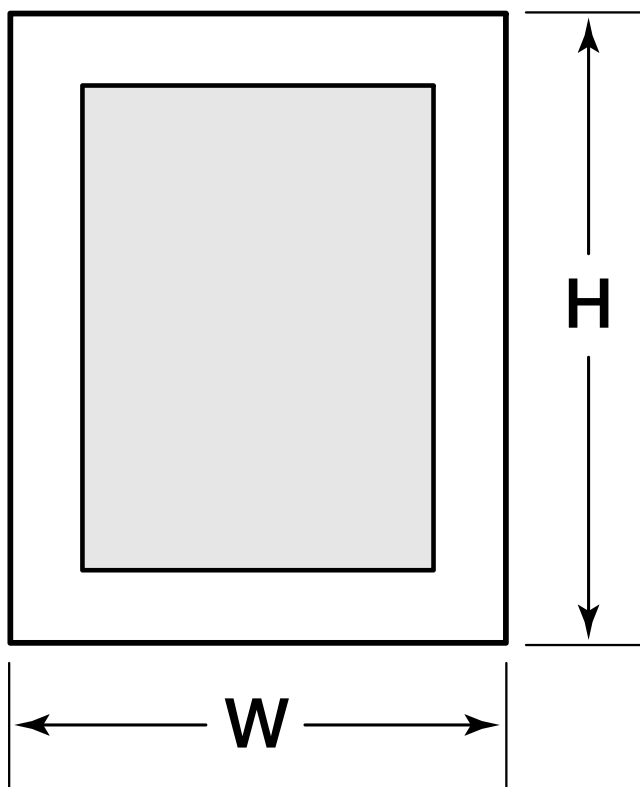

PANEL	WIDTH	HEIGHT	MIN THICKNESS	MAX WEIGHT
Door	23 ³ / ₄ "	30 ³ / ₈ "	⁵ / ₈ "	22 lbs
Top Rail	--	3 ¹ / ₂ "	⁵ / ₈ "	--
Bottom Rail	--	4 ¹ / ₂ "	⁵ / ₈ "	--
Stiles	3 ¹ / ₄ "	--	⁵ / ₈ "	--

Panel Planning Notes

Single Model: DEU2450W

The thickness of the custom panel can vary. A 5/8" (16) minimum to 3/4" (19) maximum thick panel is required.

The depth of each designer model is 23 1/8" (587). Allow for panel thickness when planning the finished opening depth.

Finish all sides of custom panels. They will be visible when the door is open.

Stainless steel tubular and pro handles are available through an authorized Sub-Zero dealer.

Finish all sides of the custom panels. They may be visible when the door is open or through the glass.

A custom door panel will attach directly to the door frame with screws through a series of pre-drilled holes. Do not install a solid panel on a glass door unit. A solid door is available as a sales accessory and must be installed if a solid panel is being specified. Service may be required to install the door. Overall dimensions are the same for glass and solid door panels.


Minimum Panel Thickness

5/8"

Standard Handle Lengths (Optional)

HANDLE	TUBULAR	PRO
DEU2450W Door	24 3/16"	22 1/2"

Toe Kick Clearance

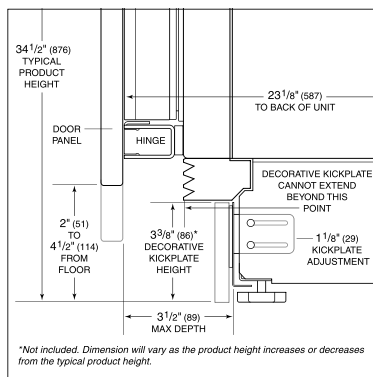

15" CLEAR ICE MAKERS



HP15CI-R
Stainless Steel Door Model
Hinged right



HA15CI-L
Stainless Steel Door Model
Hinged left

JOB	
AREA	
ITEM NO.	
MODEL NO.	

SIGNATURE SERIES MODELS

MODELS	DESCRIPTION
HP15CI-L	Solid stainless steel door, hinged left
HP15CI-R	Solid stainless steel door, hinged right
HP15CI-W*	Panel ready door, hinged left or right

ADA-HEIGHT COMPLIANT MODELS

MODELS	DESCRIPTION
HA15CI-L	Solid stainless steel door, hinged left
HA15CI-R	Solid stainless steel door, hinged right
HA15CI-W*	Panel ready door, hinged left or right

* This unit comes ready to accept customer-provided overlay panel and handle

KEY PRODUCT FEATURES AND BENEFITS

- Produces clear, top hat shaped ice, that is clear of imperfections and prevents ice from clumping like traditional ice makers
- Produces up to 51 lbs. of ice per day with a storage capacity of 22 lbs. ensures you always have fresh ice for gathering of any size
- Easily disassembled all stainless steel ice making surface allows easy cleaning and ensures fresh ice for the life of the machine
- ADA-height compliant models available for accessible and aging in place designs

ADDITIONAL FEATURES

- Available with stainless steel or panel ready doors to match your design style – Panel ready doors accept customer-supplied door overlay and handle
- UL-Approved for outdoor use
- Power switch accessible without panel removal
- Factory installed drain pump allows unit to be installed anywhere, regardless of drain location.
- UL certified for low lead (NSF 372)




PERLICK®



15" CLEAR ICE MAKERS

MODEL NUMBERS		HP15CI Signature Series	HA15CI ADA-Height Compliant Series
OVERALL DIMENSIONS	Width - in. (mm)	14-7/8" (378mm)	14-7/8" (378mm)
	Depth - in. (mm)	22-9/16" (573 mm)	22-9/16" (573 mm)
	Height - in. (mm)	33-1/2" (851 mm)	31-1/2" (800 mm)
OPENING DIMENSIONS	Width - in. (mm)	15" (381 mm)	15" (381 mm)
	Depth - in. (mm)	24-7/8" (632 mm)	24-7/8" (632 mm)
	Height - in. (mm)	34-1/2"	32-1/4" (819 mm)
SHIPPING WEIGHT Lbs.		117 lbs (53.07 kg)	117 lbs (53.07 kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115V/60 Hz/1 Ph	115V/60 Hz/1 Ph
	Running Load Amps	3.4 amps	3.4 amps
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord length	6.5 ft	6.5 ft
REFRIGERATION SPECIFICATIONS	Refrigerant	R290	R290
	Plumbing	1/2" FTP water Inlet, 1/2" FTP Drain	1/2" FTP water Inlet, 1/2" FTP Drain
OPERATING LIMITS	Ambient Temp Range	45-100F	45-100F
	Water Temp Range	45-90F	45-90F
	Water Pressure	7-113 psig	7-113 psig
	Voltage Range	104-127V	104-127V


Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com

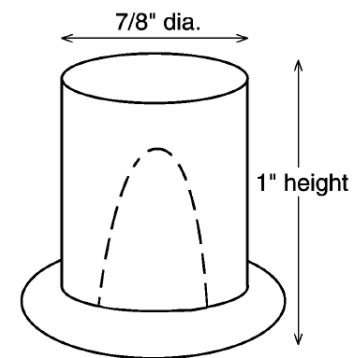


Cube Dimensions




15" CLEAR ICE MAKERS

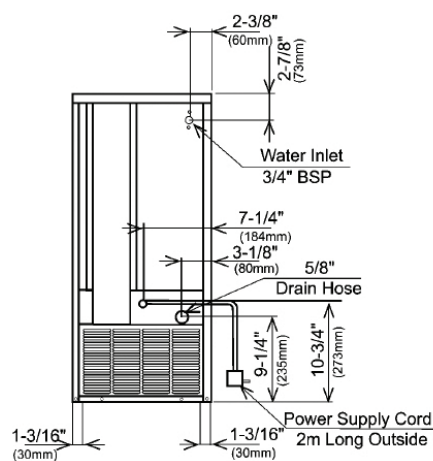

Signature Series Front, Side and Back View

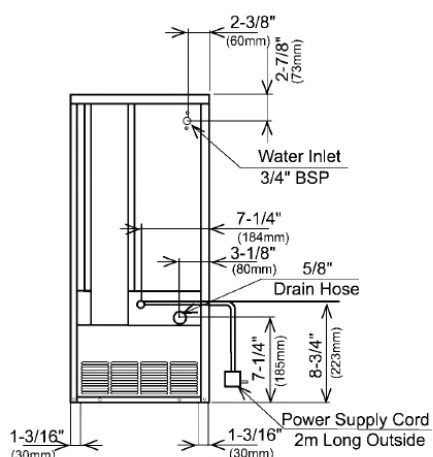

ADA-Height Compliant Series Front, Side and Back View

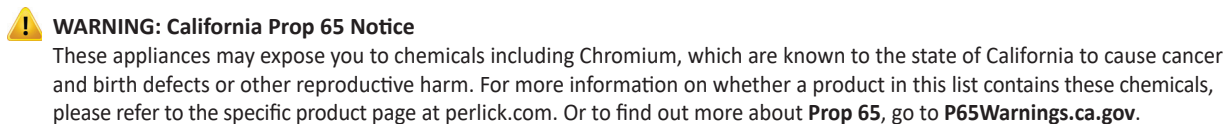

Form No. Z3015
Rev 05.08.25