

Blu·Stone™ Freestanding Basins

Installation Guide

Coco

SA0510
SA0510.01
SA0510.NS
SA0511
SA0511.01

Metrix

SA0508
SA0508.01

Halo

SA0507.01
SA0512
SA0512.01

Echo

SA0502.1FL
SA0502.1NF
SA0502.2FL
SA0502.2NF

Attention — Before Installation

- We recommend that the installation be done by a minimum of 2 people as a security precaution. Also make sure to adopt the proper posture when lifting the basin.
- Adhere to all local building and plumbing codes. The diagrams in this guide are not construction plans. They are visual aids.
- For best results, the floor must be level and the wall must be square with the floor.

Installation Requirements

Please read the instructions carefully so as to avoid any damage to the fixture.

1. To ensure this product is installed properly, you must read and follow these guidelines.
2. The owner/user of the product must keep this information for future reference.
3. Consult local building codes to make sure the installation complies with standards.
4. Remove the unit from its packaging. Before disposing of it, inspect the unit to make sure its in good shape. Should inspection reveal any damage or defect in the finish, contact your distributor. The warranty does not cover damages or defects in the finish once it has been installed. Blu Bathworks' responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.
5. Place the unit in the bathroom before you start working. Conserve all hardware supplied.
6. To protect the unit during installation, we recommend that you lay a piece of cardboard on the bottom.
7. If the unit is covered with polyethylene protective film, do not remove until installation is complete to grant maximum protection. However, remove film where any two surfaces will be in permanent contact.
8. Verify that all dimensions on the plan are the same as the ones of the unit.

Installation Notes

Important! Install this product according to the installation guide. Product does have an overflow. Spout must provide a minimum of 5" reach for adequate clearance into basin. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations.

Technical Support Assistance

If further assistance is required, please contact:

Product Support at 1.866.907.0122 (09:00 – 17:00hrs PST) or email support@blubathworks.com

North America

Blu Bathworks Inc.

7388 Hedley Avenue, Burnaby, BC, Canada, V5E 2P9

T +1.604.299.0122 F +1.604.299.0125

Please refer to blubathworks.com for warranty, terms & conditions under warranty & procedure for warranty service.


Installation for Freestanding Basins

PREPARATION




1. Place Pedestal into install position. Ensure product is level when placed into its predetermined installation position.
2. Mark the footprint location for final installation by tracing along the base of the pedestal with a removable marker.
3. Remove pedestal and install floor waste rough, etc.

PEDESTAL INSTALLATION

4. Install drain assembly and move pedestal basin into its final install position.
5. Complete connection of drain assembly to the waste pipe using the rear cut-out.

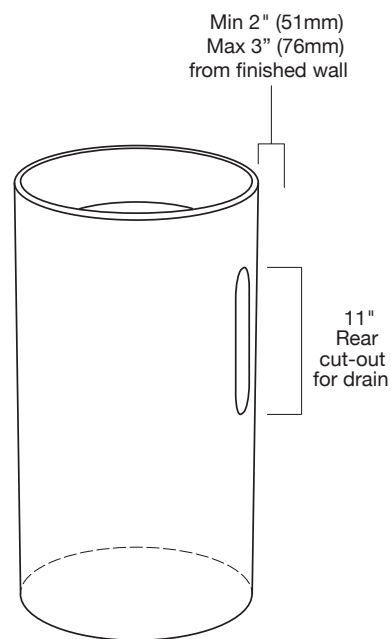

All dimensions based on recommended 3" gap between finished wall – actual distance based on spout length to be confirmed by installer

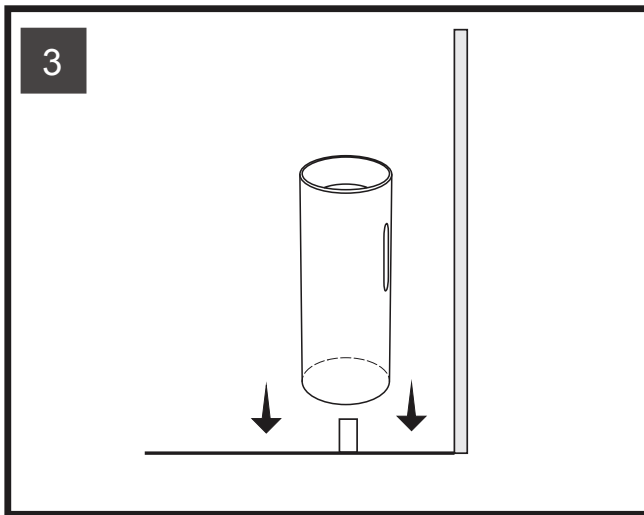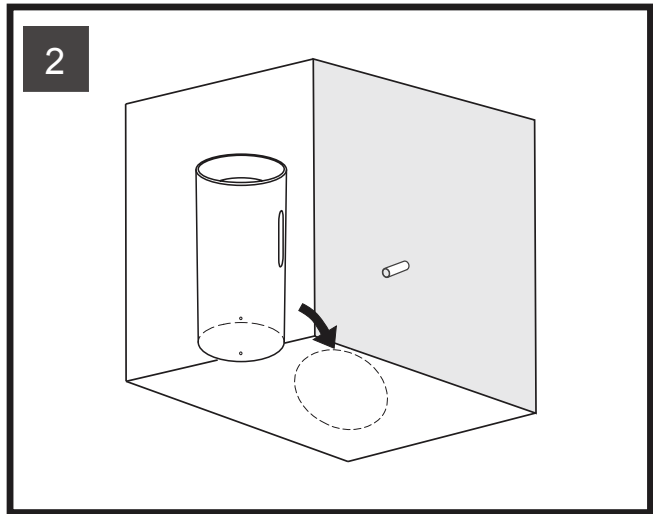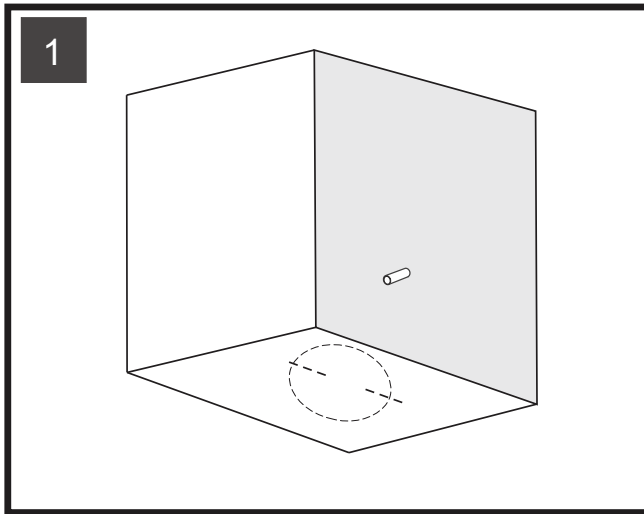

FAUCET AND DRAIN CONNECTIONS (NOT SUPPLIED)

1. Connect the water supply to the faucet according to faucet instructions.
2. Connect and tighten the trap to the drain.
DO NOT over tighten as it can lead to future stress cracking.
3. Turn ON the water supplies to the faucet.
4. Purge air from the HOT & COLD water by running the water for a few seconds.
5. Fill the lavatory with water.
6. Check for leaks at the water supply and drain connections.

blu·stone™ cleaning & repair guide

blu·stone™ is Blu Bathworks' signature eco-friendly stone collection; a durable, low maintenance and hygienic material that is high pressure injection molded, non-porous and anti-microbial. blu·stone™ products are stain, scratch and impact resistant, and easy to clean: after each use, simply wipe with a soft cloth to remove any surface dirt.

routine care

- Never expose blu·stone™ to petroleum based products, such as paint removers, oven cleaners or other solvents (**Note:** personal hygiene products and cosmetics will NOT damage the surface)
- We recommend that stains are removed within 24 hours
- Do not directly cut on the blu·stone™ surface
- Blu Bathworks does not recommend exceeding US/ Canada maximum hot water temperature regulations of 150°F/65°C, respectively. Exceeding stated temperatures could result in damage to blu·stone™ products

standard cleaning

For standard cleaning of both gloss and matte finishes, we recommend using widely available cleaning products such as Mr. Clean, Fantastik, VIM, CIF etc. Matte finished products may occasionally require a mildly abrasive product.

blu·stone™ matte finish:

- For more difficult stains, use a mildly abrasive cream cleanser such as Soft Scrub, Comet Soft Cleanser, CIF or VIM blu·stone™ gloss

finish:

- Do not use abrasive products or cream cleansers

scratched or damaged surfaces

blu·stone™ matte finish:

- Ensure there is no surface dirt by flushing with water
- Rub the 600-grit sanding block, provided, in a gentle circular motion
- Higher grit sandpaper may be required to blend the repaired area to match the existing product finish

blu·stone™ gloss finish:

- Ensure there is no surface dirt by flushing with water
- We recommend sanding the area starting with 600, 800 and 1200-grit sandpaper: begin with the lower number (coarser) grit followed with each higher number (finer) in ascending order
- Finish by polishing the surface using a cloth and white polishing compound for automobiles

repairs

For more extensive repairs, send a photograph of your blu·stone™ product to Blu Customer Service (support@blubathworks.com), who will inform you as to the most appropriate methods to use.

limited blu·stone™ residential warranty

Blu Bathworks® ("Blu") blu·stone™ products are warranted to the original purchaser to be free from defects in all material and workmanship during normal residential use for a period of five (5) years from the date of purchase. Blu will, at its election, repair, provide a replacement part or product, or make appropriate adjustment, subject to the terms and conditions set forth in this warranty. Blu Bathworks does not recommend exceeding US/Canada maximum hot water temperature regulations of 130°F / 55°C, respectively. Exceeding stated temperatures could result in damage to blu·stone™ basins and bathtubs. Over tightening of drains leading to stress cracks will not be covered by warranty. Failure to have this product initially installed on any of our noted fixtures will automatically void the warranty. Bathtub/basin drains and parts are warranted for a period of 1 year.

188 Smithe Street, Vancouver, BC V6B 6A9 Canada | T 1.604.299.0122 | TF 1.866.907.0122 | F 1.604.299.0125 | blubathworks.com