

# WEST HAVEN 2901 PLUMBING UPDATE 8/14/26

**NAME** Jason Wolter  
**EMAIL** jason.wolter@fuseappliances.com  
**PHONE** 561-445-8795

# Table of Contents

| VENDOR PART         | VENDOR             | DESCRIPTION                                                                                        | PAGE |
|---------------------|--------------------|----------------------------------------------------------------------------------------------------|------|
| <b>KITCHEN</b>      |                    |                                                                                                    |      |
| IWS-30-S-2-WA       | The Galley         | The Galley Workstation Ideal Workstation 2 30S With Five Tool Culinary Kit - American Black Walnut | 6    |
| ATL-PO-304          | Franke             | Atlas Neo Pull Out - Stainless Steel                                                               | 9    |
| <b>PRIMARY BATH</b> |                    |                                                                                                    |      |
| 7702-SN             | California Faucets | Morro Bay 8" Widespread Lavatory Faucet - Satin Nickel                                             | 12   |
| CT9538CEFG#01       | Toto               | Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Bowl Unit - Cotton White                    | 13   |
| SN9538M#01          | Toto               | Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Top Unit - Cotton White                     | 16   |
| WT175MA             | Toto               | Neorest 1.2 Or 0.8 Gpf Dual Flush In-Wall Tank Unit                                                | 19   |
| YT990#N             | Toto               | Neorest Push Button Plate For In-Wall Tank Unit White Glass - Nickel                               | 22   |
| 7711-H77.20-SN      | California Faucets | Morro Bay Modern Single Hole Floor Mount Tub Filler - Satin Nickel                                 | 25   |
| 9511                | California Faucets | Rough Valve For Single Hole Floor Mount Tub Filler                                                 | 26   |
| 77-TR-SN            | California Faucets | Morro Bay Towel Ring - Satin Nickel                                                                | 27   |
| 77-STP-SN           | California Faucets | Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel                              | 28   |
| 77-RH-SN            | California Faucets | Morro Bay Robe Hook - Satin Nickel                                                                 | 29   |
| SH-1414.18-SN       | California Faucets | Rainscape Rainscape 14" X 14" Recessed Showerhead - Satin Nickel                                   | 30   |
| 9126-78-SN          | California Faucets | Terra Mar Wall Mounted Handshower Kit, Rectangle Base - Satin Nickel                               | N/A  |
| HS-72.18-SN         | California Faucets | Contemporary Handshower - Satin Nickel                                                             | 31   |
| TO-THFN-77-SN       | California Faucets | Morro Bay StyleTherm 3/4" Thermostatic Trim Only - Satin Nickel                                    | 32   |
| THT75-R             | California Faucets | StyleTherm 3/4" Rough Valve                                                                        | 33   |

|                       |                           |                                                                                          |            |
|-----------------------|---------------------------|------------------------------------------------------------------------------------------|------------|
| <b>TO-77-W-SN</b>     | <b>California Faucets</b> | <b>Morro Bay Wall Or Deck Handle Trim Only - Satin Nickel</b>                            | <b>34</b>  |
| <b>75-W-R</b>         | <b>California Faucets</b> | <b>3/4" Wall Stop Valve Only</b>                                                         | <b>35</b>  |
| <b>STIF6536SS</b>     | <b>Infinity Drain</b>     | <b>Site Sizable Series 36" Pvc Complete Kit With Tile Insert Frame - Satin Stainless</b> | <b>36</b>  |
| <b>POWDER BATH</b>    |                           |                                                                                          |            |
| <b>TO-V7701-9-SN</b>  | <b>California Faucets</b> | <b>Morro Bay Single Handle Lavatory Wall Faucet Trim Only - Satin Nickel</b>             | <b>40</b>  |
| <b>SHV-R</b>          | <b>California Faucets</b> | <b>Single Handle Lavatory Wall Rough In Valve</b>                                        | <b>41</b>  |
| <b>SN7631M#01</b>     | <b>Toto</b>               | <b>Eco Soire Washlet G5A Integrated Toilet Top Unit - Cotton White</b>                   | <b>42</b>  |
| <b>CT7631CEMFG#01</b> | <b>Toto</b>               | <b>Eco Soire Washlet G5A Integrated Toilet Bowl Unit - Cotton White</b>                  | <b>44</b>  |
| <b>77-TR-SN</b>       | <b>California Faucets</b> | <b>Morro Bay Towel Ring - Satin Nickel</b>                                               | <b>46</b>  |
| <b>77-STP-SN</b>      | <b>California Faucets</b> | <b>Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel</b>             | <b>47</b>  |
| <b>GUEST 1</b>        |                           |                                                                                          |            |
| <b>7702-SN</b>        | <b>California Faucets</b> | <b>Morro Bay 8" Widespread Lavatory Faucet - Satin Nickel</b>                            | <b>50</b>  |
| <b>CT9538CEFG#01</b>  | <b>Toto</b>               | <b>Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Bowl Unit - Cotton White</b>   | <b>51</b>  |
| <b>SN9538M#01</b>     | <b>Toto</b>               | <b>Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Top Unit - Cotton White</b>    | <b>54</b>  |
| <b>WT175MA</b>        | <b>Toto</b>               | <b>Neorest 1.2 Or 0.8 Gpf Dual Flush In-Wall Tank Unit</b>                               | <b>57</b>  |
| <b>77-TR-SN</b>       | <b>California Faucets</b> | <b>Morro Bay Towel Ring - Satin Nickel</b>                                               | <b>60</b>  |
| <b>77-STP-SN</b>      | <b>California Faucets</b> | <b>Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel</b>             | <b>61</b>  |
| <b>77-RH-SN</b>       | <b>California Faucets</b> | <b>Morro Bay Robe Hook - Satin Nickel</b>                                                | <b>62</b>  |
| <b>SH-1414.18-SN</b>  | <b>California Faucets</b> | <b>Rainscape Rainscape 14" X 14" Recessed Showerhead - Satin Nickel</b>                  | <b>63</b>  |
| <b>9126-78-SN</b>     | <b>California Faucets</b> | <b>Terra Mar Wall Mounted Handshower Kit, Rectangle Base - Satin Nickel</b>              | <b>N/A</b> |
| <b>HS-72.18-SN</b>    | <b>California Faucets</b> | <b>Contemporary Handshower - Satin Nickel</b>                                            | <b>64</b>  |

|                             |                           |                                                                                          |            |
|-----------------------------|---------------------------|------------------------------------------------------------------------------------------|------------|
| <b>TO-THFN-77-SN</b>        | <b>California Faucets</b> | <b>Morro Bay StyleTherm 3/4" Thermostatic Trim Only - Satin Nickel</b>                   | <b>65</b>  |
| <b>THT75-R</b>              | <b>California Faucets</b> | <b>StyleTherm 3/4" Rough Valve</b>                                                       | <b>66</b>  |
| <b>TO-77-W-SN</b>           | <b>California Faucets</b> | <b>Morro Bay Wall Or Deck Handle Trim Only - Satin Nickel</b>                            | <b>67</b>  |
| <b>75-W-R</b>               | <b>California Faucets</b> | <b>3/4" Wall Stop Valve Only</b>                                                         | <b>68</b>  |
| <b>STIF6536SS</b>           | <b>Infinity Drain</b>     | <b>Site Sizable Series 36" Pvc Complete Kit With Tile Insert Frame - Satin Stainless</b> | <b>69</b>  |
| <b>GUEST 2 (STEAM ROOM)</b> |                           |                                                                                          |            |
| <b>7702-SN</b>              | <b>California Faucets</b> | <b>Morro Bay 8" Widespread Lavatory Faucet - Satin Nickel</b>                            | <b>74</b>  |
| <b>SN7631M#01</b>           | <b>Toto</b>               | <b>Eco Soire Washlet G5A Integrated Toilet Top Unit - Cotton White</b>                   | <b>75</b>  |
| <b>CT7631CEMFG#01</b>       | <b>Toto</b>               | <b>Eco Soire Washlet G5A Integrated Toilet Bowl Unit - Cotton White</b>                  | <b>77</b>  |
| <b>77-TR-SN</b>             | <b>California Faucets</b> | <b>Morro Bay Towel Ring - Satin Nickel</b>                                               | <b>79</b>  |
| <b>77-STP-SN</b>            | <b>California Faucets</b> | <b>Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel</b>             | <b>80</b>  |
| <b>77-RH-SN</b>             | <b>California Faucets</b> | <b>Morro Bay Robe Hook - Satin Nickel</b>                                                | <b>81</b>  |
| <b>SH-1414.18-SN</b>        | <b>California Faucets</b> | <b>Rainscape Rainscape 14" X 14" Recessed Showerhead - Satin Nickel</b>                  | <b>82</b>  |
| <b>9126-78-SN</b>           | <b>California Faucets</b> | <b>Terra Mar Wall Mounted Handshower Kit, Rectangle Base - Satin Nickel</b>              | <b>N/A</b> |
| <b>HS-72.18-SN</b>          | <b>California Faucets</b> | <b>Contemporary Handshower - Satin Nickel</b>                                            | <b>83</b>  |
| <b>TO-THFN-77-SN</b>        | <b>California Faucets</b> | <b>Morro Bay StyleTherm 3/4" Thermostatic Trim Only - Satin Nickel</b>                   | <b>84</b>  |
| <b>THT75-R</b>              | <b>California Faucets</b> | <b>StyleTherm 3/4" Rough Valve</b>                                                       | <b>85</b>  |
| <b>TO-77-W-SN</b>           | <b>California Faucets</b> | <b>Morro Bay Wall Or Deck Handle Trim Only - Satin Nickel</b>                            | <b>86</b>  |
| <b>75-W-R</b>               | <b>California Faucets</b> | <b>3/4" Wall Stop Valve Only</b>                                                         | <b>87</b>  |
| <b>STIF6536SS</b>           | <b>Infinity Drain</b>     | <b>Site Sizable Series 36" Pvc Complete Kit With Tile Insert Frame - Satin Stainless</b> | <b>88</b>  |

| <b>VENDOR PART</b>   | <b>VENDOR</b>     | <b>DESCRIPTION</b>                                                                                        | <b>PAGE</b> |
|----------------------|-------------------|-----------------------------------------------------------------------------------------------------------|-------------|
| <b>IWS-30-S-2-WA</b> | <b>The Galley</b> | <b>The Galley Workstation Ideal Workstation 2 30S With Five Tool Culinary Kit - American Black Walnut</b> | <b>6</b>    |
| <b>ATL-PO-304</b>    | <b>Franke</b>     | <b>Atlas Neo Pull Out - Stainless Steel</b>                                                               | <b>9</b>    |

# Ideal Workstation<sup>2</sup> 30S SPECIFICATIONS

## IWS-30-S-2-QW



Quartered White Oak

## IWS-30-S-2-WA




American Black Walnut

## IWS-30-S-2-GT



Graphite Wood Composite

## IWS-30-S-2-GR



Exclusive Gray Resin\*

## IWS-30-S-2-WH




Designer White Resin\*

## Culinary Tools included (CKT-12)

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| (1) Upper Deck Section<br>12" x 19"<br>UD-12-L-xx                                   | (1) Upper Tier Drying Rack<br>12 1/4" x 18"<br>DR-12-U-xx                           | (1) Upper Tier Cutting Board<br>12 1/4" x 18"<br>CB-12-U-xx                         | (2) Lower Tier Platforms<br>12 1/4" x 17"<br>P1-12-L-xx                             | (1) SS Colander<br>11" 7.2-qt<br>C1-11-O-ST                                         | (1) SS Mixing Bowl<br>11" 7.2-qt<br>B1-11-O-ST                                      |


## Upper Deck. & citrine.

Cover set UD-30-2P-QW/WA/GT/GR/WH White Oak, Walnut, Graphite, Gray or White Resin



18"

12"



(1) 12"

Included in CKT

citrine care

CIT-09-SS-C



Stainless Steel  
Clean + Polish 9 oz

CIT-17-SS-S




Stainless Steel Spray  
+ Refresh 17 oz

CIT-09-WD-C



Wood Condition  
+ Protect 9 oz

CIT-04-WD-B



Wood Finishing  
Balm 4 oz


# THE GALLEY®

## Specifications


Single bowl  
Users: 1  
Culinary Tools included: Five  
Galley BarTap, recommended: One  
Outside dimensions: 27 1/2" x 19 1/2" x 11 1/16"  
Interior dimensions: 26" x 18" x 10 3/4"  
Countertop cutout: 26" x 18"  
Basin area: 26" x 16"  
Minimum cabinet size: 30" or 76cm

## Basin (KSO-30-S-2-SS)

16GA 316L stainless steel indoor/outdoor  
SilentArmor™ sound reduction technology  
Angel finish  
Three tier design with integrated Upper Tier  
Star™ groove pattern  
Reversible side drain  
Drain cover included  
Limited Lifetime Warranty  
Made in the USA  
ASME A112.19.3/CSA B45.4 certified  
cUPC™ certified



Center Galley Tap holes 2" from the back of the 18" countertop cutout




## Customize Your Galley

Add 7-12" length  
Add 1-6" length  
Add 18" DryDock  
Add 12" DryDock  
Apron front

9" depth  
Center drain  
WorkTop™  
\*Color coded labels available

## Recommended Basin Accessories & G4

Bottom Grate set BG-30-S-1-SS Stainless Steel



25 1/2"

Strainer M-DRN-MSS  
Angel Finish 304 Stainless Steel



Disposer Strainer G-DRN-MSS  
Angel Finish 304 Stainless Steel



Auto Strainer A-DRN-PSS/MSS/BSS/YSS  
Angel Finish 304 Stainless Steel with Polished, Matte, PVD Satin Black, or PVD Brushed Gold knob



A-DRN-MSS shown

Disposal G4-WD-125





# Ideal Workstation<sup>2</sup> 30S

SPECIFICATIONS | Right Hand Drain Orientation

**THE GALLEY**  
■ ■ ■ ■

## Tap Hole Specifications

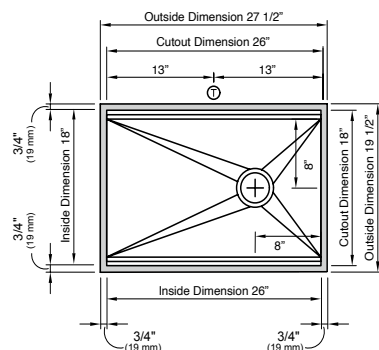

### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley BarTap, 1 3/8" min to 1 1/2" max hole diameter



Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email [customer@thegalley.com](mailto:customer@thegalley.com) for additional guidance on Tap and Tap Accessory placements

## Countertop Cutout Plan

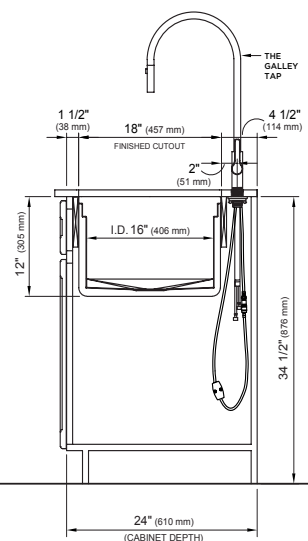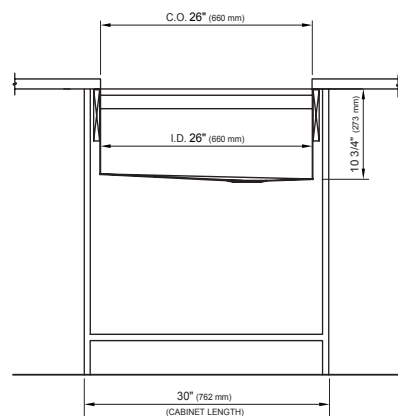

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:  
[TheGalley.com/specification-library](http://TheGalley.com/specification-library)



Questions? For additional assistance, please contact  
The Galley's Customer Care Department at 800.375.4255

# Ideal Workstation<sup>2</sup> 30S

SPECIFICATIONS | Left Hand Drain Orientation

**THE GALLEY**  
■ ■ ■ ■

## Tap Hole Specifications

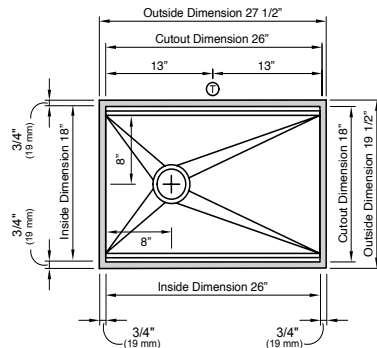

### SUGGESTED GALLEY TAP PLACEMENT GUIDE

Suggested maximum inside corner radius of countertop cutout 3/8"

① Galley Tap 1 3/8" min to 1 1/2" max hole diameter



Center Tap hole diameters 2" behind cutout

Note: Galley Hot & Cold Tap requires a minimum 8" clearance to center if installed to the right of the Galley Tap

Note: Tap Placements are for right hand or left hand drain orientation

Call 800.375.4255 or email [customer@thegalley.com](mailto:customer@thegalley.com)  
for additional guidance on Tap and Tap Accessory placements

## Countertop Cutout Plan

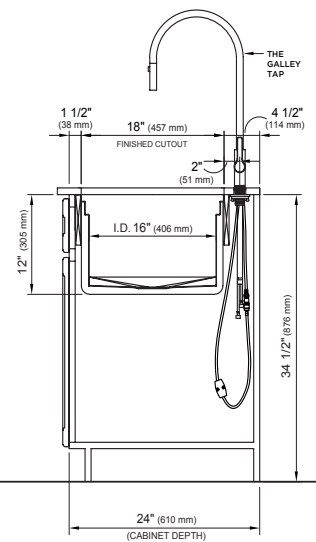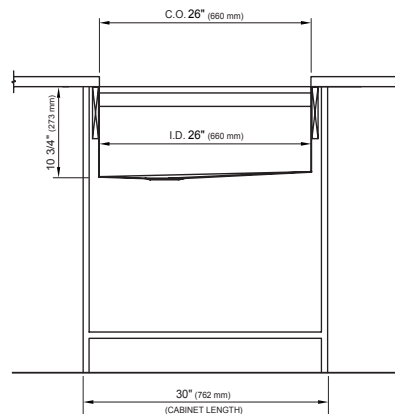

STAINLESS STEEL COMPLIANCE ASME A112. 19.3-2008/CSA B45.4-08

WE RESERVE THE RIGHT TO MAKE REVISIONS WITHOUT NOTICE IN THE DESIGN OF PRODUCTS OR IN PACKAGING UNLESS THIS RIGHT HAS SPECIFICALLY BEEN WAIVED AT THE TIME THE ORDER IS ACCEPTED.

DWG and DXF templates available on our website:  
[TheGalley.com/specification-library](http://TheGalley.com/specification-library)

Questions? For additional assistance, please contact  
The Galley's Customer Care Department at 800.375.4255

# ATLAS NEO

## 1-HOLE PULL-OUT KITCHEN FAUCET Model ATL-PO-304

### FEATURES

- Solid 304 stainless steel construction delivers corrosion resistance inside and out.
- A laminar aerator ensures the delivery of a clear, non-splashing water stream, with very little noise.
- The pull-out spay head has an upgraded swivel hose for expert mobility and total sink coverage.
- Dual functioning spray head can toggle between powerful spray and stream, making clean-up effortless.

### TECHNICAL FEATURES

|                    |                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------|
| Faucet Type        | 1-Hole Pull-Out                                                                               |
| Flow Rate          | 1.75 GPM                                                                                      |
| Spray Type         | Stream and Spray                                                                              |
| Spray Function     | Toggle                                                                                        |
| Number of Handles  | 1                                                                                             |
| Spout Swivel Range | 180°                                                                                          |
| Cartridge          | 35mm ceramic                                                                                  |
| Countertop Hole    | 1-3/8"                                                                                        |
| Weight             | 7 lbs                                                                                         |
| Warranty           | Limited Lifetime                                                                              |
| Certifying Agency  | IAPMO                                                                                         |
| Certifications     | ASME A112.18.1<br>/ CSA B125.1<br>NSF/ANSI/<br>CAN 61-2020<br>AB100 compliant<br>NSF/ANSI 372 |
| ADA Compliant      | Yes                                                                                           |

### AVAILABLE FINISHES

ATL-PO-304  
115.0685.311




Stainless Steel  
(304)

Product Image



Dimensional Drawing

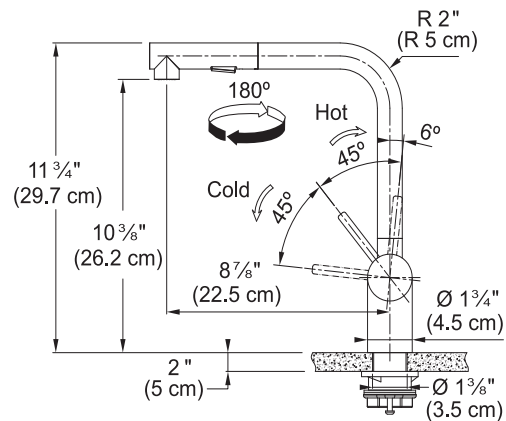

| VENDOR PART    | VENDOR             | DESCRIPTION                                                                     | PAGE |
|----------------|--------------------|---------------------------------------------------------------------------------|------|
| 7702-SN        | California Faucets | Morro Bay 8" Widespread Lavatory Faucet - Satin Nickel                          | 12   |
| CT9538CEFG#01  | Toto               | Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Bowl Unit - Cotton White | 13   |
| SN9538M#01     | Toto               | Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Top Unit - Cotton White  | 16   |
| WT175MA        | Toto               | Neorest 1.2 Or 0.8 Gpf Dual Flush In-Wall Tank Unit                             | 19   |
| YT990#N        | Toto               | Neorest Push Button Plate For In-Wall Tank Unit White Glass - Nickel            | 22   |
| 7711-H77.20-SN | California Faucets | Morro Bay Modern Single Hole Floor Mount Tub Filler - Satin Nickel              | 25   |
| 9511           | California Faucets | Rough Valve for Single Hole Floor Mount Tub Filler                              | 26   |
| 77-TR-SN       | California Faucets | Morro Bay Towel Ring - Satin Nickel                                             | 27   |
| 77-STP-SN      | California Faucets | Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel           | 28   |
| 77-RH-SN       | California Faucets | Morro Bay Robe Hook - Satin Nickel                                              | 29   |

|                      |                           |                                                                                          |            |
|----------------------|---------------------------|------------------------------------------------------------------------------------------|------------|
| <b>SH-1414.18-SN</b> | <b>California Faucets</b> | <b>Rainscape Rainscape 14" X 14" Recessed Showerhead - Satin Nickel</b>                  | <b>30</b>  |
| <b>9126-78-SN</b>    | <b>California Faucets</b> | <b>Terra Mar Wall Mounted Handshower Kit, Rectangle Base - Satin Nickel</b>              | <b>N/A</b> |
| <b>HS-72.18-SN</b>   | <b>California Faucets</b> | <b>Contemporary Handshower - Satin Nickel</b>                                            | <b>31</b>  |
| <b>TO-THFN-77-SN</b> | <b>California Faucets</b> | <b>Morro Bay StyleTherm 3/4" Thermostatic Trim Only - Satin Nickel</b>                   | <b>32</b>  |
| <b>THT75-R</b>       | <b>California Faucets</b> | <b>StyleTherm 3/4" Rough Valve</b>                                                       | <b>33</b>  |
| <b>TO-77-W-SN</b>    | <b>California Faucets</b> | <b>Morro Bay Wall or Deck Handle Trim Only - Satin Nickel</b>                            | <b>34</b>  |
| <b>75-W-R</b>        | <b>California Faucets</b> | <b>3/4" Wall Stop Valve Only</b>                                                         | <b>35</b>  |
| <b>STIF6536SS</b>    | <b>Infinity Drain</b>     | <b>Site Sizable Series 36" Pvc Complete Kit With Tile Insert Frame - Satin Stainless</b> | <b>36</b>  |



**California Faucets®**

# Morro Bay™

## WIDESPREAD LAVATORY FAUCET

**7702**


### Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 5-1/2" [140] spout center to center
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- Ø 1-1/4" all brass touch style pop up drain assembly
- 1.2 gpm (4.5 L/m) max flow rate




### Codes/Standards Applicable

Meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA
- ADA compliant

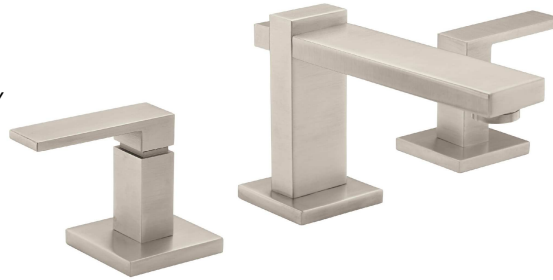

7702 shown

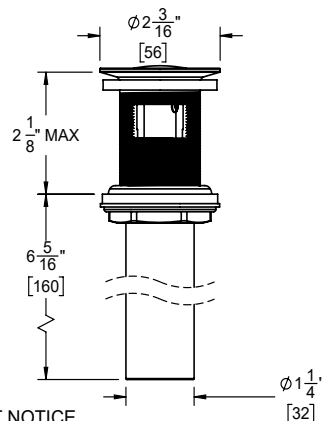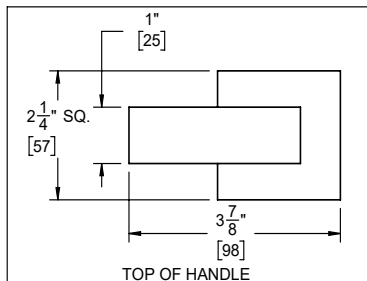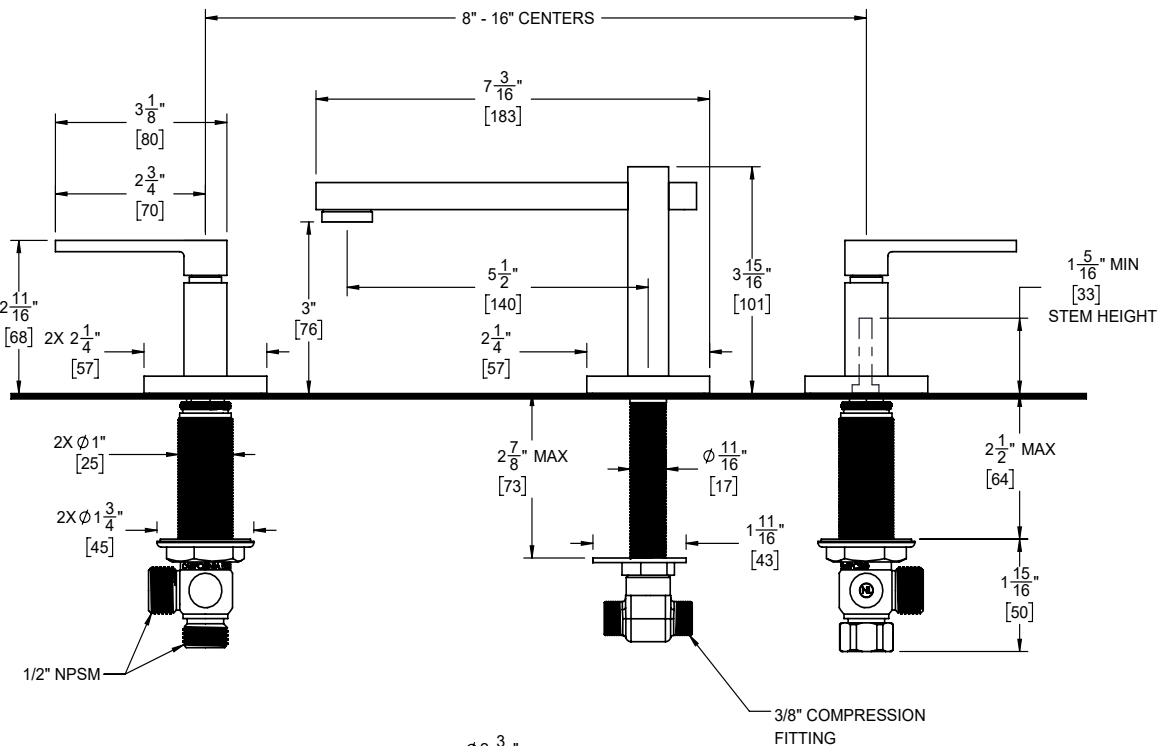

| THROUGH-HOLE SPECIFICATIONS |               |               |
|-----------------------------|---------------|---------------|
| MIN                         | RECOMMENDED   | MAX           |
| SPOUT: Ø 1-1/8" [29]        | Ø 1-3/8" [35] | Ø 1-1/2" [38] |
| VALVE: Ø 1" [25]            | Ø 1-3/8" [35] | Ø 1-1/2" [38] |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS SHOWN TO NEAREST 1/16"  
[DIMENSIONS SHOWN TO NEAREST 1mm]

**TOTO®**

**CWT9538CEMFG**

**NEOREST® WX1**  
**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

**FEATURES**

**NEOREST WX1**

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

**NEOREST In-Wall Tank Unit**

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

**MODELS**

- **CT9538CEFG#01**  
Bowl Unit
- **SN9538M#01**  
Top Unit
- **WT175MA**  
In-Wall Tank System (Copper Pipe)
- **YT990#N**  
Nickel Push Plate



-  **TORNADO FLUSH**
-  **EWATER+**
-  **CEFIONTECT**
-  **Auto Flush**
-  **UNIVERSAL HEIGHT**
-  **Skirted Design**

**COLORS/FINISHES**

- #01 Cotton

**CODES/STANDARDS**

- Meets and exceeds:
  - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### SPECIFICATIONS




| CT9538CEFG          |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF)                                        |
| Flush System        | TORNADO FLUSH®                                                          |
| Water Pressure      | Minimum:<br>7.25 PSI (Dynamic)<br>Maximum:<br>108.75 PSI (Static)       |
| Water Surface       | 5-5/8" x 4-1/8"                                                         |
| Trap Diameter       | 2-1/4"                                                                  |
| Trap Seal           | 2"                                                                      |
| Warranty            | Three Year Limited<br>(Residential)<br>One Year Limited<br>(Commercial) |
| Material            | Bowl Unit: Vitreous China<br>Top Unit: Plastic                          |
| Shipping Weight     | 88.4 lbs                                                                |
| Shipping Dimensions | 31-1/4" x 18-3/8" x 19-1/4"                                             |

| SN9538M                 |                                                                                                                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating            | AC 120 V 60 Hz                                                                                                                                                                   |
| Power Consumption       | 1294 W                                                                                                                                                                           |
| Max Power Consumption   | 1452 W                                                                                                                                                                           |
| Power Cord Length       | 1.6 ft (0.5 m)                                                                                                                                                                   |
| Spray Volume            | Rear Cleansing:<br>0.08 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.08 – 0.11 gal/min<br>Front Cleansing:<br>0.08 – 0.11 gal/min<br>Wide Front Cleansing:<br>0.09 – 0.11 gal/min |
| Spray Features          | Adjustable Water Temp:<br>86 – 104 °F (30 – 40 °C)<br>Safety Device:<br>Temperature Fuse                                                                                         |
| Warm Air Dryer Features | Adjustable Air Temp:<br>95 – 140 °F (35 – 60 °C)<br>Airflow Volume:<br>8.83 ft³/min (0.25 m³/min)<br>Safety Device:<br>Temperature Fuse                                          |
| Heated Seat Features    | Adjustable Surface Temp:<br>82 – 97 °F (28 – 36 °C)<br>Safety Device:<br>Temperature Fuse                                                                                        |
| Ambient Temperature     | 32 – 104 °F (0 – 40 °C)                                                                                                                                                          |
| Shipping Weight         | 28.7 lbs                                                                                                                                                                         |
| Shipping Dimensions     | 31-1/4" x 20-5/8" x 9-7/8"                                                                                                                                                       |

| WT175MA             |                                  |
|---------------------|----------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF) |
| Flush System        | Dual Flushing                    |
| Min Water Pressure  | 8 PSI (static)                   |
| Max Water Pressure  | 108.75 PSI (static)              |
| Installation Height | 15" to 19"                       |
| Warranty            | One Year Limited                 |
| Material            | Various                          |
| Shipping Weight     | 44 lbs                           |
| Shipping Dimensions | 47-1/4" x 26-3/16" x 5-7/8"      |

#### DIMENSIONS



##### CT9538CEFG

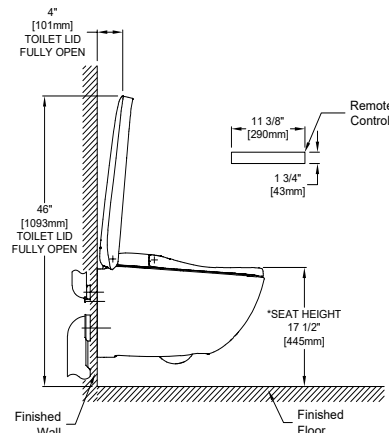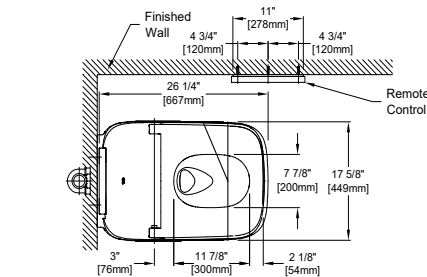

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9538CEMFG#01.

#### PRODUCT SPECIFICATION

Refer to the installation template included with the In Wall Tank for drilling the necessary holes




\* Suggested Dimension

## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### YT990

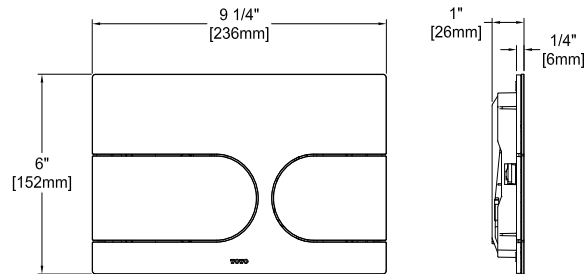

#### INSTALLATION NOTES

- WT175MA  
Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.


Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

For use with potable water only. Do not use with recycled water.

It is highly recommended to use a surge protector to prevent damage in the event of a power surge. The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

#### DIMENSIONS

##### WT175MA

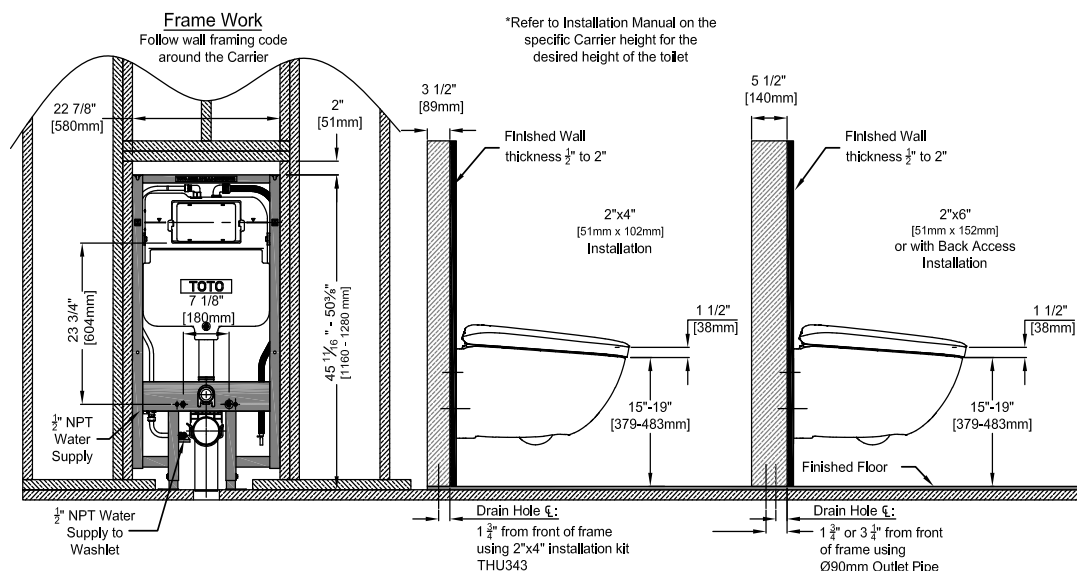

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02254 v.01

**TOTO®**

**CWT9538CEMFG**

**NEOREST® WX1**  
**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

**FEATURES**

**NEOREST WX1**

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

**NEOREST In-Wall Tank Unit**

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

**MODELS**

- **CT9538CEFG#01**  
Bowl Unit
- **SN9538M#01**  
Top Unit
- **WT175MA**  
In-Wall Tank System (Copper Pipe)
- **YT990#N**  
Nickel Push Plate



- TORNADO FLUSH**
- EWATER+**
- CEFIONTECT**
- Auto Flush**
- UNIVERSAL HEIGHT**
- Skirted Design**

**COLORS/FINISHES**

- #01 Cotton

**CODES/STANDARDS**

- Meets and exceeds:
  - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### SPECIFICATIONS




| CT9538CEFG          |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF)                                        |
| Flush System        | TORNADO FLUSH®                                                          |
| Water Pressure      | Minimum:<br>7.25 PSI (Dynamic)<br>Maximum:<br>108.75 PSI (Static)       |
| Water Surface       | 5-5/8" x 4-1/8"                                                         |
| Trap Diameter       | 2-1/4"                                                                  |
| Trap Seal           | 2"                                                                      |
| Warranty            | Three Year Limited<br>(Residential)<br>One Year Limited<br>(Commercial) |
| Material            | Bowl Unit: Vitreous China<br>Top Unit: Plastic                          |
| Shipping Weight     | 88.4 lbs                                                                |
| Shipping Dimensions | 31-1/4" x 18-3/8" x 19-1/4"                                             |

| SN9538M                 |                                                                                                                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating            | AC 120 V 60 Hz                                                                                                                                                                   |
| Power Consumption       | 1294 W                                                                                                                                                                           |
| Max Power Consumption   | 1452 W                                                                                                                                                                           |
| Power Cord Length       | 1.6 ft (0.5 m)                                                                                                                                                                   |
| Spray Volume            | Rear Cleansing:<br>0.08 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.08 – 0.11 gal/min<br>Front Cleansing:<br>0.08 – 0.11 gal/min<br>Wide Front Cleansing:<br>0.09 – 0.11 gal/min |
| Spray Features          | Adjustable Water Temp:<br>86 – 104 °F (30 – 40 °C)<br>Safety Device:<br>Temperature Fuse                                                                                         |
| Warm Air Dryer Features | Adjustable Air Temp:<br>95 – 140 °F (35 – 60 °C)<br>Airflow Volume:<br>8.83 ft³/min (0.25 m³/min)<br>Safety Device:<br>Temperature Fuse                                          |
| Heated Seat Features    | Adjustable Surface Temp:<br>82 – 97 °F (28 – 36 °C)<br>Safety Device:<br>Temperature Fuse                                                                                        |
| Ambient Temperature     | 32 – 104 °F (0 – 40 °C)                                                                                                                                                          |
| Shipping Weight         | 28.7 lbs                                                                                                                                                                         |
| Shipping Dimensions     | 31-1/4" x 20-5/8" x 9-7/8"                                                                                                                                                       |

| WT175MA             |                                  |
|---------------------|----------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF) |
| Flush System        | Dual Flushing                    |
| Min Water Pressure  | 8 PSI (static)                   |
| Max Water Pressure  | 108.75 PSI (static)              |
| Installation Height | 15" to 19"                       |
| Warranty            | One Year Limited                 |
| Material            | Various                          |
| Shipping Weight     | 44 lbs                           |
| Shipping Dimensions | 47-1/4" x 26-3/16" x 5-7/8"      |

#### DIMENSIONS



##### CT9538CEFG

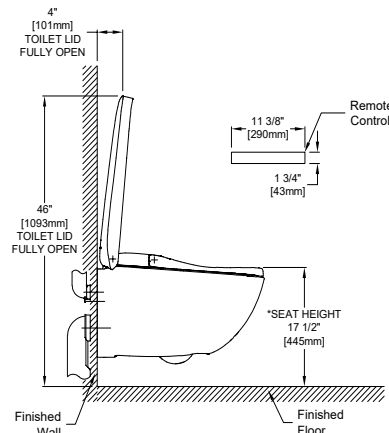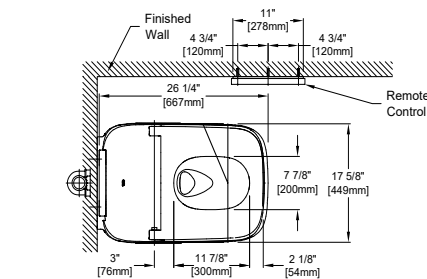

#### PRODUCT SPECIFICATION

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9538CEMFG#01.

Refer to the installation template included with the In Wall Tank for drilling the necessary holes




\* Suggested Dimension

## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### YT990

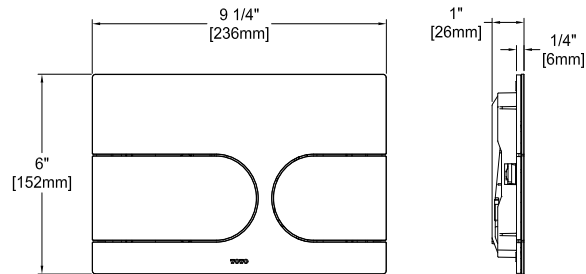

#### INSTALLATION NOTES

- WT175MA  
Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.


Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

For use with potable water only. Do not use with recycled water.

It is highly recommended to use a surge protector to prevent damage in the event of a power surge. The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

#### DIMENSIONS

##### WT175MA

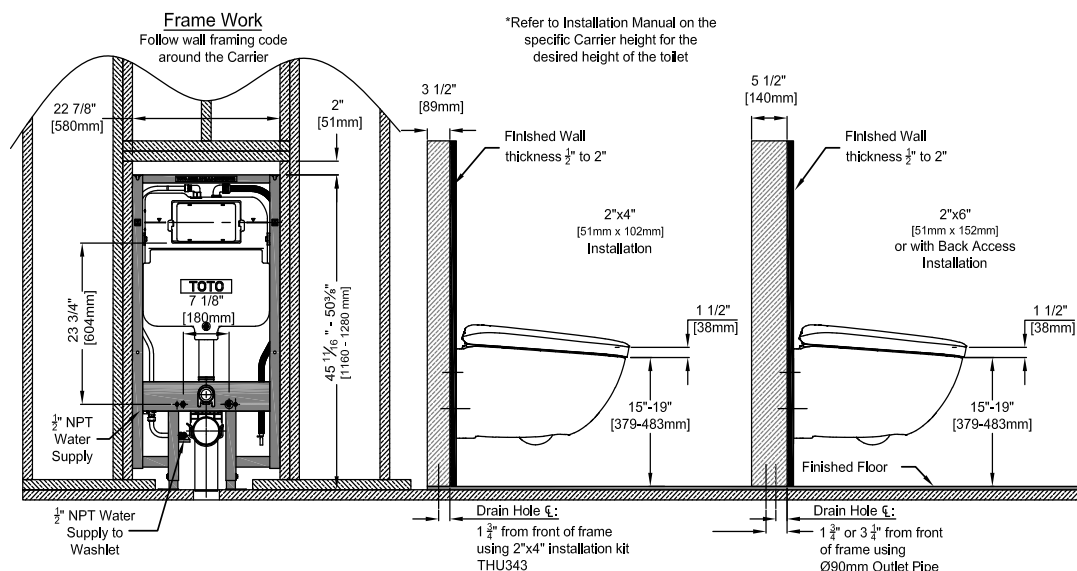

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02254 v.01

**TOTO®**

**CWT9538CEMFG**

**NEOREST® WX1**  
**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

**FEATURES**

**NEOREST WX1**

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

**NEOREST In-Wall Tank Unit**

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

**MODELS**

- **CT9538CEFG#01**  
Bowl Unit
- **SN9538M#01**  
Top Unit
- **WT175MA**  
In-Wall Tank System (Copper Pipe)
- **YT990#N**  
Nickel Push Plate



-  **TORNADO FLUSH**
-  **EWATER+**
-  **CEFIONTECT**
-  **Auto Flush**
-  **UNIVERSAL HEIGHT**
-  **Skirted Design**

**COLORS/FINISHES**

- #01 Cotton

**CODES/STANDARDS**

- Meets and exceeds:
  - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### SPECIFICATIONS




| CT9538CEFG          |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF)                                        |
| Flush System        | TORNADO FLUSH®                                                          |
| Water Pressure      | Minimum:<br>7.25 PSI (Dynamic)<br>Maximum:<br>108.75 PSI (Static)       |
| Water Surface       | 5-5/8" x 4-1/8"                                                         |
| Trap Diameter       | 2-1/4"                                                                  |
| Trap Seal           | 2"                                                                      |
| Warranty            | Three Year Limited<br>(Residential)<br>One Year Limited<br>(Commercial) |
| Material            | Bowl Unit: Vitreous China<br>Top Unit: Plastic                          |
| Shipping Weight     | 88.4 lbs                                                                |
| Shipping Dimensions | 31-1/4" x 18-3/8" x 19-1/4"                                             |

| SN9538M                 |                                                                                                                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating            | AC 120 V 60 Hz                                                                                                                                                                   |
| Power Consumption       | 1294 W                                                                                                                                                                           |
| Max Power Consumption   | 1452 W                                                                                                                                                                           |
| Power Cord Length       | 1.6 ft (0.5 m)                                                                                                                                                                   |
| Spray Volume            | Rear Cleansing:<br>0.08 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.08 – 0.11 gal/min<br>Front Cleansing:<br>0.08 – 0.11 gal/min<br>Wide Front Cleansing:<br>0.09 – 0.11 gal/min |
| Spray Features          | Adjustable Water Temp:<br>86 – 104 °F (30 – 40 °C)<br>Safety Device:<br>Temperature Fuse                                                                                         |
| Warm Air Dryer Features | Adjustable Air Temp:<br>95 – 140 °F (35 – 60 °C)<br>Airflow Volume:<br>8.83 ft³/min (0.25 m³/min)<br>Safety Device:<br>Temperature Fuse                                          |
| Heated Seat Features    | Adjustable Surface Temp:<br>82 – 97 °F (28 – 36 °C)<br>Safety Device:<br>Temperature Fuse                                                                                        |
| Ambient Temperature     | 32 – 104 °F (0 – 40 °C)                                                                                                                                                          |
| Shipping Weight         | 28.7 lbs                                                                                                                                                                         |
| Shipping Dimensions     | 31-1/4" x 20-5/8" x 9-7/8"                                                                                                                                                       |

| WT175MA             |                                  |
|---------------------|----------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF) |
| Flush System        | Dual Flushing                    |
| Min Water Pressure  | 8 PSI (static)                   |
| Max Water Pressure  | 108.75 PSI (static)              |
| Installation Height | 15" to 19"                       |
| Warranty            | One Year Limited                 |
| Material            | Various                          |
| Shipping Weight     | 44 lbs                           |
| Shipping Dimensions | 47-1/4" x 26-3/16" x 5-7/8"      |

#### DIMENSIONS



##### CT9538CEFG

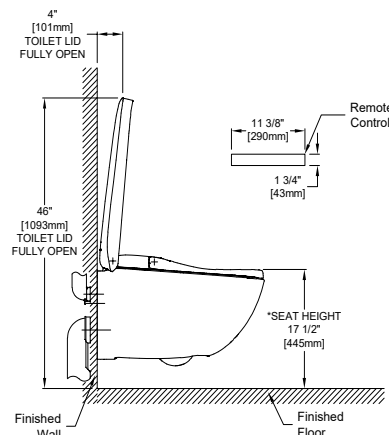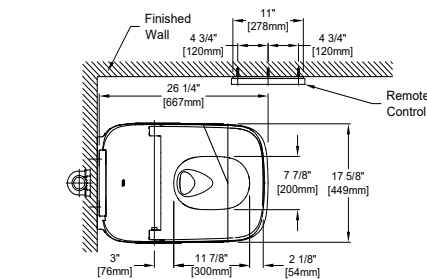

#### PRODUCT SPECIFICATION

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9538CEMFG#01.

Refer to the installation template included with the In Wall Tank for drilling the necessary holes




\* Suggested Dimension

## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### YT990

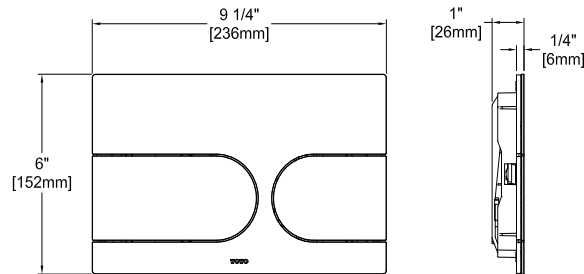

#### INSTALLATION NOTES

- WT175MA  
Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.


Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

For use with potable water only. Do not use with recycled water.

It is highly recommended to use a surge protector to prevent damage in the event of a power surge. The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

#### DIMENSIONS

##### WT175MA

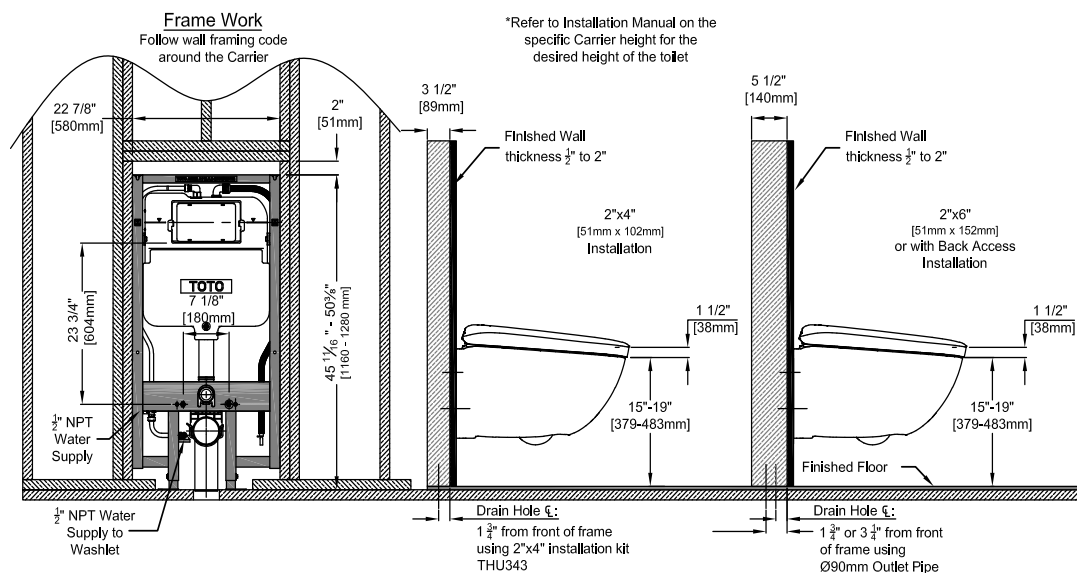

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02254 v.01

**TOTO®**

**CWT9538CEMFG**

**NEOREST® WX1**  
**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

**FEATURES**

**NEOREST WX1**

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

**NEOREST In-Wall Tank Unit**

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

**MODELS**

- **CT9538CEFG#01**  
Bowl Unit
- **SN9538M#01**  
Top Unit
- **WT175MA**  
In-Wall Tank System (Copper Pipe)
- **YT990#N**  
Nickel Push Plate



-  **TORNADO FLUSH**
-  **EWATER+**
-  **CEFIONTECT**
-  **Auto Flush**
-  **UNIVERSAL HEIGHT**
-  **Skirted Design**

**COLORS/FINISHES**

- #01 Cotton

**CODES/STANDARDS**

- Meets and exceeds:
  - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### SPECIFICATIONS




| CT9538CEFG          |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF)                                        |
| Flush System        | TORNADO FLUSH®                                                          |
| Water Pressure      | Minimum:<br>7.25 PSI (Dynamic)<br>Maximum:<br>108.75 PSI (Static)       |
| Water Surface       | 5-5/8" x 4-1/8"                                                         |
| Trap Diameter       | 2-1/4"                                                                  |
| Trap Seal           | 2"                                                                      |
| Warranty            | Three Year Limited<br>(Residential)<br>One Year Limited<br>(Commercial) |
| Material            | Bowl Unit: Vitreous China<br>Top Unit: Plastic                          |
| Shipping Weight     | 88.4 lbs                                                                |
| Shipping Dimensions | 31-1/4" x 18-3/8" x 19-1/4"                                             |

| SN9538M                 |                                                                                                                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating            | AC 120 V 60 Hz                                                                                                                                                                   |
| Power Consumption       | 1294 W                                                                                                                                                                           |
| Max Power Consumption   | 1452 W                                                                                                                                                                           |
| Power Cord Length       | 1.6 ft (0.5 m)                                                                                                                                                                   |
| Spray Volume            | Rear Cleansing:<br>0.08 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.08 – 0.11 gal/min<br>Front Cleansing:<br>0.08 – 0.11 gal/min<br>Wide Front Cleansing:<br>0.09 – 0.11 gal/min |
| Spray Features          | Adjustable Water Temp:<br>86 – 104 °F (30 – 40 °C)<br>Safety Device:<br>Temperature Fuse                                                                                         |
| Warm Air Dryer Features | Adjustable Air Temp:<br>95 – 140 °F (35 – 60 °C)<br>Airflow Volume:<br>8.83 ft³/min (0.25 m³/min)<br>Safety Device:<br>Temperature Fuse                                          |
| Heated Seat Features    | Adjustable Surface Temp:<br>82 – 97 °F (28 – 36 °C)<br>Safety Device:<br>Temperature Fuse                                                                                        |
| Ambient Temperature     | 32 – 104 °F (0 – 40 °C)                                                                                                                                                          |
| Shipping Weight         | 28.7 lbs                                                                                                                                                                         |
| Shipping Dimensions     | 31-1/4" x 20-5/8" x 9-7/8"                                                                                                                                                       |

| WT175MA             |                                  |
|---------------------|----------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF) |
| Flush System        | Dual Flushing                    |
| Min Water Pressure  | 8 PSI (static)                   |
| Max Water Pressure  | 108.75 PSI (static)              |
| Installation Height | 15" to 19"                       |
| Warranty            | One Year Limited                 |
| Material            | Various                          |
| Shipping Weight     | 44 lbs                           |
| Shipping Dimensions | 47-1/4" x 26-3/16" x 5-7/8"      |

#### DIMENSIONS

##### CT9538CEFG

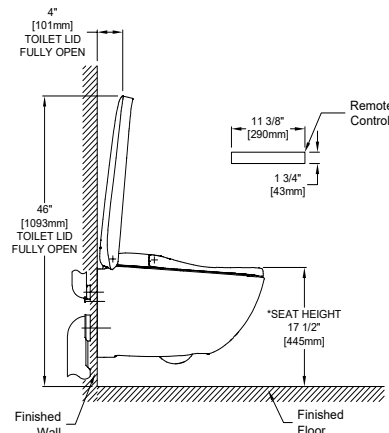
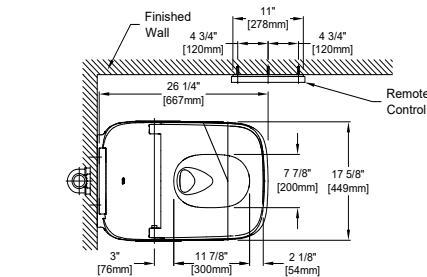


\* Suggested Dimension

#### PRODUCT SPECIFICATION

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9538CEMFG#01.

Refer to the installation template included with the In Wall Tank for drilling the necessary holes




## CWT9538CEMFG

### NEOREST® WX1

### Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### YT990

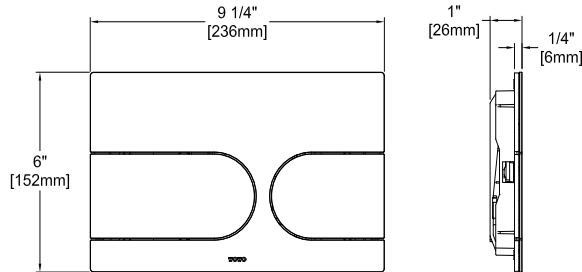

#### INSTALLATION NOTES

- WT175MA  
Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.


Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

For use with potable water only. Do not use with recycled water.

It is highly recommended to use a surge protector to prevent damage in the event of a power surge. The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

#### DIMENSIONS

#### WT175MA

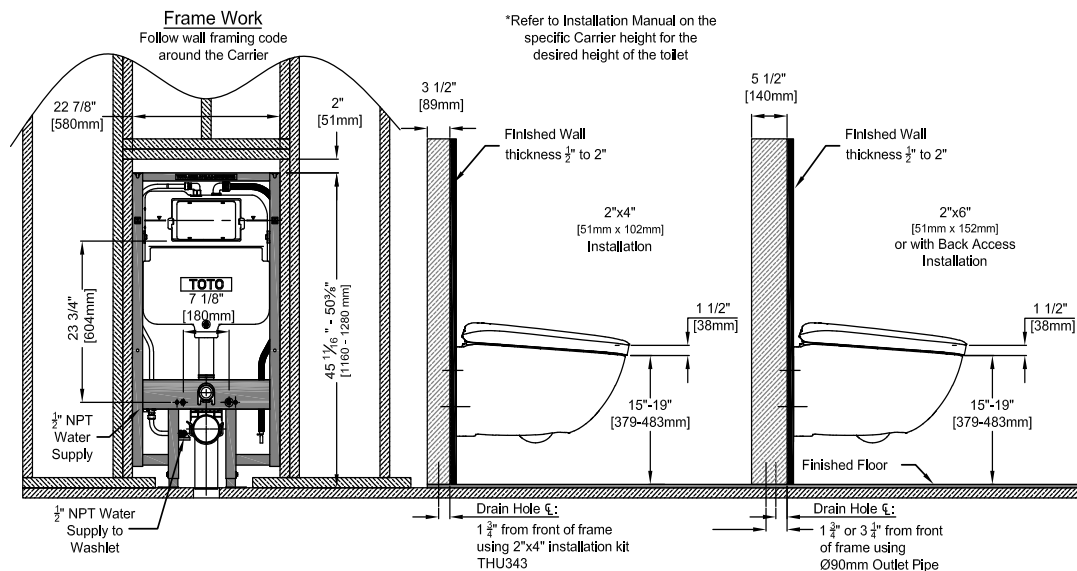

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02254 v.01



**California Faucets®**

**Morro Bay®**

Contemporary Single Hole Floor Mount Tub Filler With Handshower

## Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- No additional wall or trap stabilizer kit required
- 10 gpm (37 L/min) tub filler max flow rate at 60 psi
- 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min) handshower max flow rate
- Ceramic mixing cartridge
- Handshower holder may be adjusted forward during installation
- Rough valve (9511) sold separately

**7711-XX.20**

**7711-XX.18**



7711-E3.FR shown



XX denotes handle series



## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm)/DOE (1.8 & 2.0 gpm)
- Commonwealth of MA
- ADA compliant (lever handles only)
- Local codes may require installation of an upstream tempering valve

| Handle Series | A                | B                 |
|---------------|------------------|-------------------|
| 37<br>37T     | 2-7/16"<br>[63]  | 6-7/16"<br>[163]  |
| 45            | 3"<br>[77]       | 6-1/4"<br>[158]   |
| 70            | 2-3/4"<br>[70]   | 5-15/16"<br>[151] |
| 77            | 2-3/4"<br>[70]   | 5-3/4"<br>[147]   |
| E3            | 3-5/16"<br>[101] | 5-13/16"<br>[148] |
| E4            | 2-3/4"<br>[70]   | 6-5/16"<br>[160]  |
| E5            | 2-3/4"<br>[70]   | 6-3/16"<br>[157]  |

| Through-Hole Specifications |                    |                     |
|-----------------------------|--------------------|---------------------|
| Min                         | Recommended        | Max                 |
| Ø 3-11/16"<br>[94]          | Ø 3-11/16"<br>[94] | Ø 3-15/16"<br>[100] |

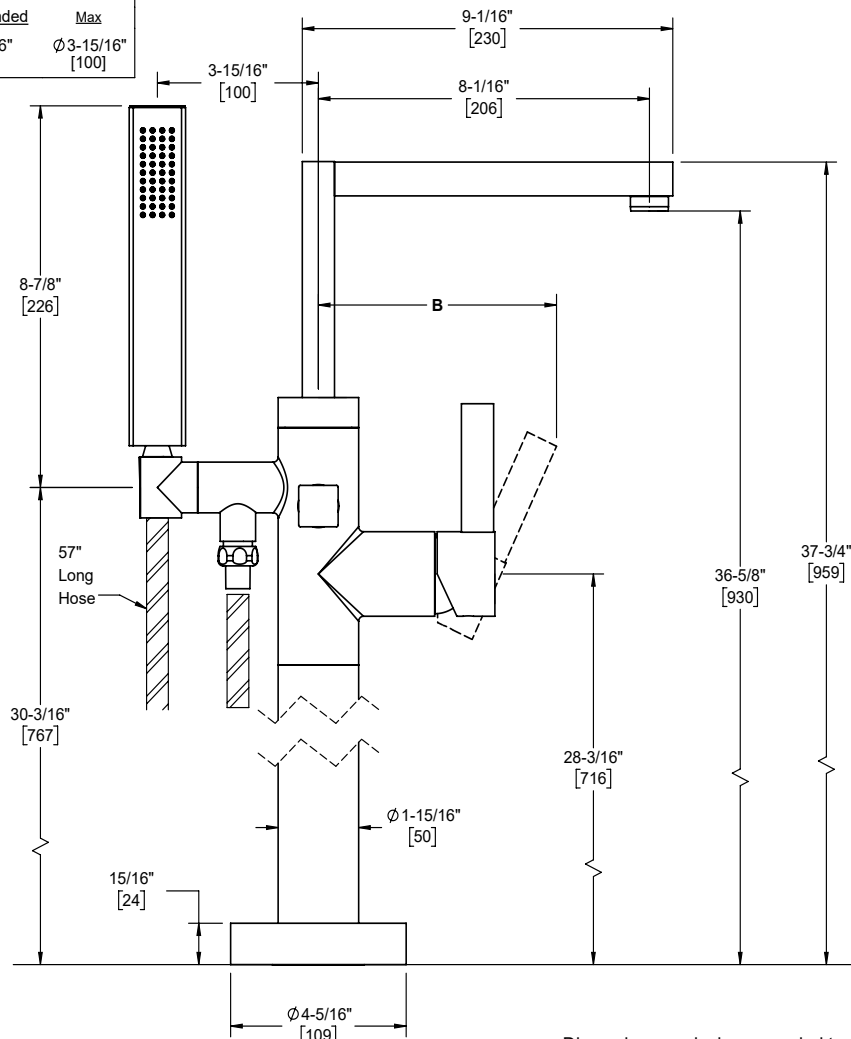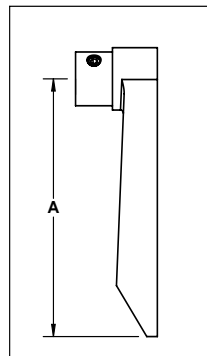

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



**California Faucets®**

## Rough Valve For Single-Hole Floor Mount Tub Filler


### Features

- Forged rough provides solid support for installation in concrete or wood subflooring
- $\phi$  5-1/2" [140] rigid base with pre-drilled screw holes to mount to underlying concrete & wood framing
- 1/2" NPT female inlets
- Includes mudguard & test plug plate




### Codes/Standards Applicable

- Meets or Exceeds the following:
- ASME A112.18.1/CSA B125.1


**9511**



| For use with  |
|---------------|
| 0811-XX.FR    |
| 0911-XX.FR    |
| 1011-XX.FR    |
| 1111-XX.FR    |
| 1211-XX.FR    |
| 1311-XX.FR    |
| 1411-XX.FR    |
| 7711-XX.FR    |
| 8511.FR       |
| 8511B.FR      |
| 8511W.FR      |
| 8611.FR       |
| 8611B.FR      |
| 8611W.FR      |
| C108-ETS.FR   |
| C108X-ETS.FR  |
| C108XS-ETS.FR |

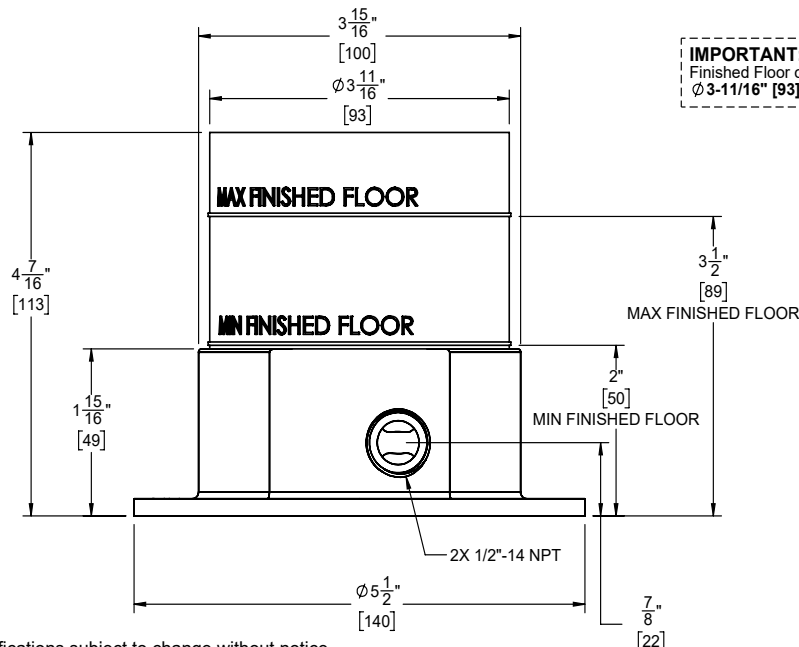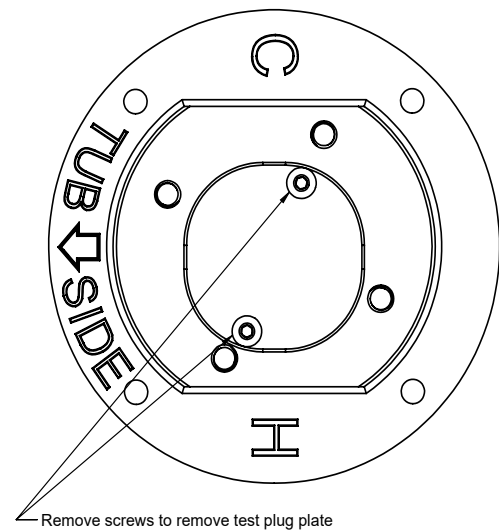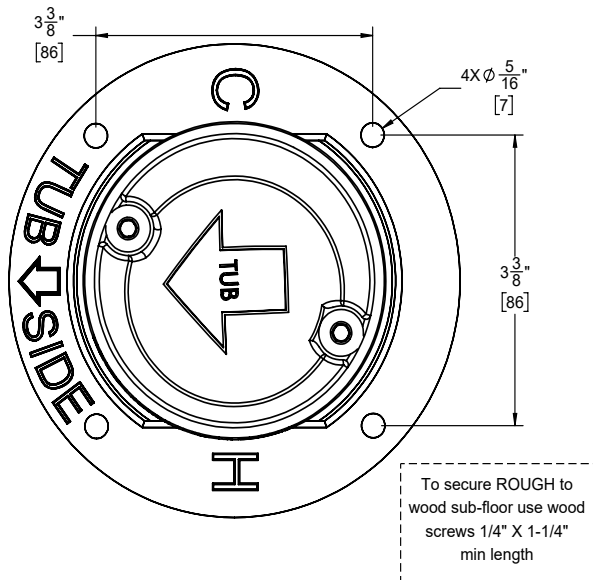

**IMPORTANT:**  
Finished Floor opening **MUST** be:  
 $\phi$  3-11/16" [93] to  $\phi$  3-15/16" [100]

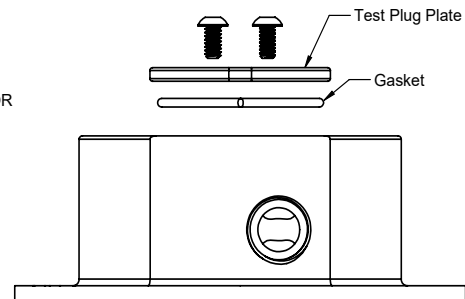

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]




# **Morro Bay<sup>TM</sup>**

## **Towel Ring**

**77-TR**

### Features



- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



### Codes/Standards

Product meets or exceeds the following:

- None applicable

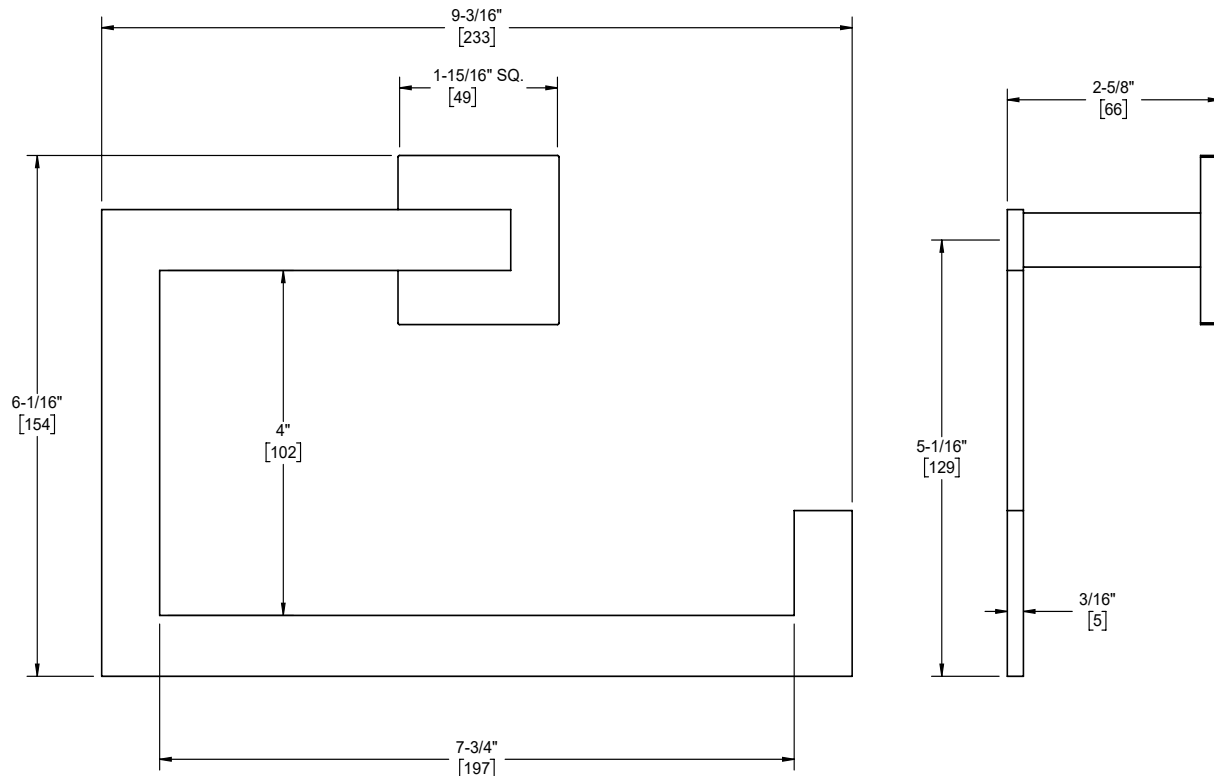

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-TR\_sp\_212707



# ***Morro Bay™***

## ***Single Post Paper / Towel Holder***

### Features

**77-STP**




- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



### Codes/Standards

Product meets or exceeds the following:

- None applicable

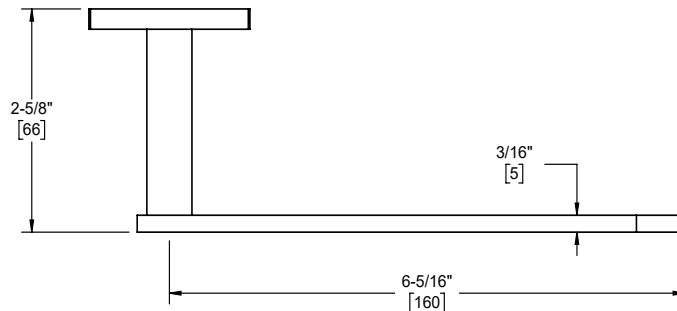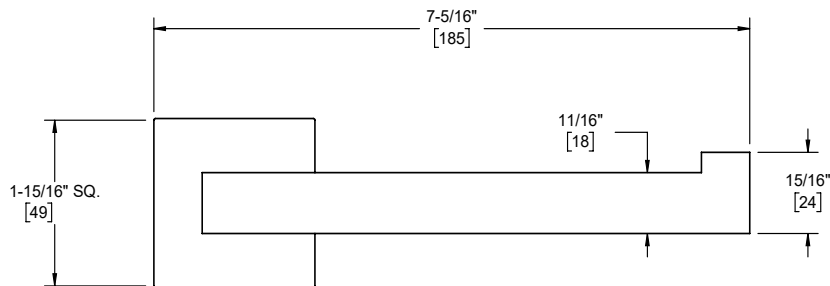

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-STP\_sp\_212707



# **Morro Bay™**

**Robe Hook**

## Features

**77-RH**




- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



## Codes/Standards

Product meets or exceeds the following:

- None applicable

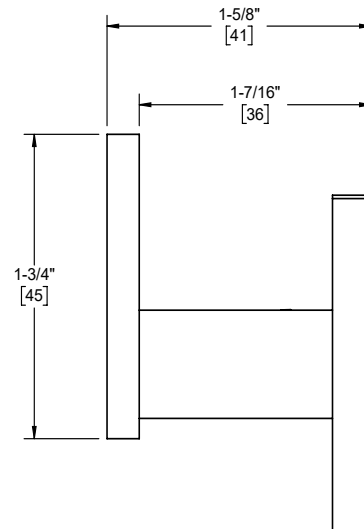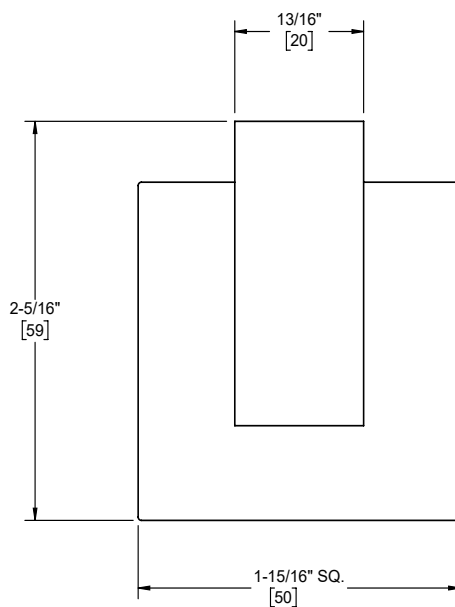

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice



**California Faucets®**

# Rainscape™

**14"X14" Recessed Showerhead**

## Features


- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Ultra-thin faceplate mounts directly to ceiling
- Self-cleaning rubber jets
- Replace .FR with desired max flow rate:
  - SH-1414.18-ZZ for 1.8 gpm
  - SH-1414.20-ZZ for 2.0 gpm
  - SH-1414.25-ZZ for 2.5 gpm
- Includes all mounting hardware, supply hose, and template

## Codes/Standards Applicable




Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) & DOE (1.8, 2.0, & 2.5 gpm)
- Commonwealth of MA
- EPA WaterSense (1.8 & 2.0 gpm)

**SH-1414.18**  
**SH-1414.20**  
**SH-1414.25**

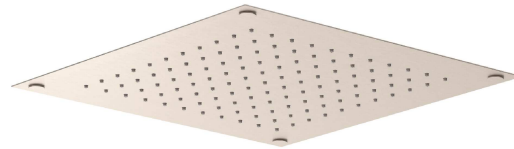

**Note:** Requires specific ceiling cut outs  
See install instructions & template

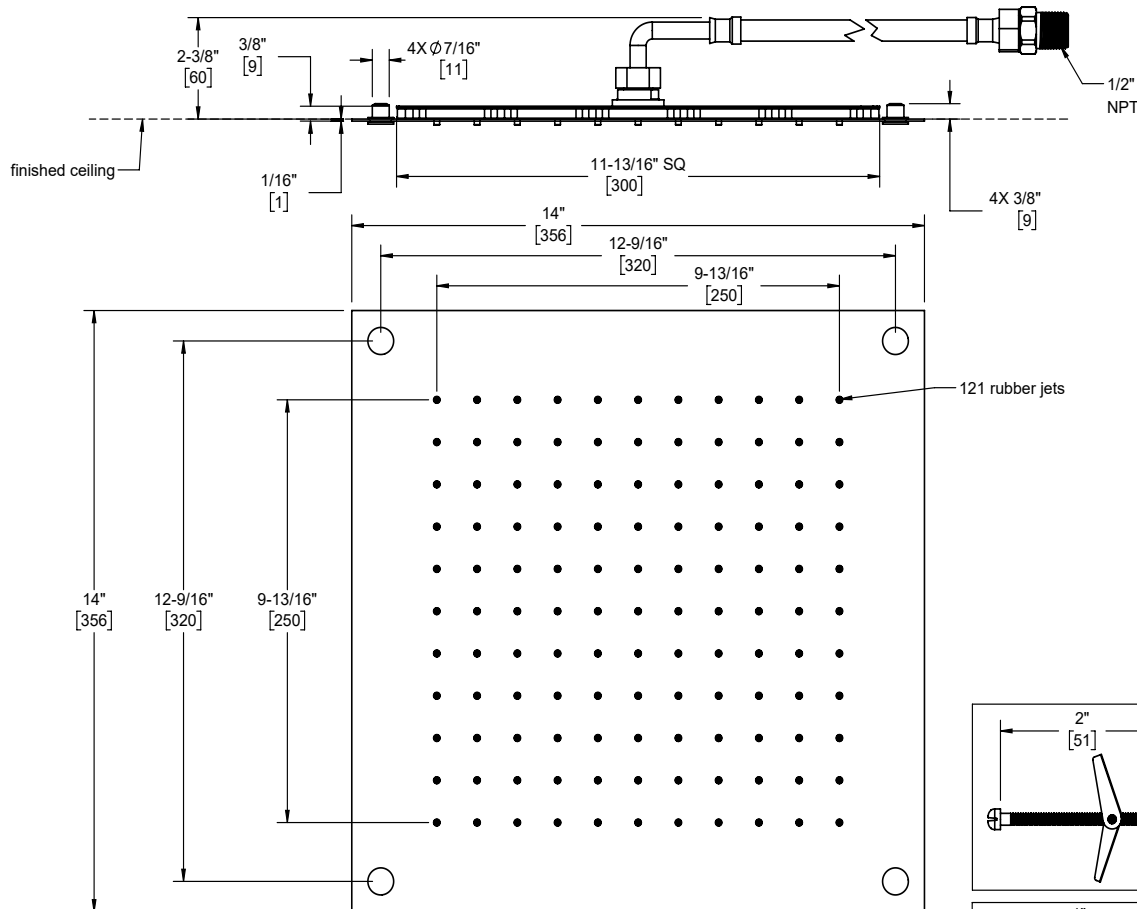

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



# Handshower

Contemporary

## Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Self-cleaning rubber jets
- Replace .FR with desired max flow rate:  
HS-72.25 for 2.5 gpm  
HS-72.20 for 2.0 gpm  
HS-72.18 for 1.8 gpm



HS-72.25  
HS-72.20  
HS-72.18



## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (2.0 & 1.8 gpm)
- DOE (2.5, 2.0, & 1.8 gpm)
- Commonwealth of MA

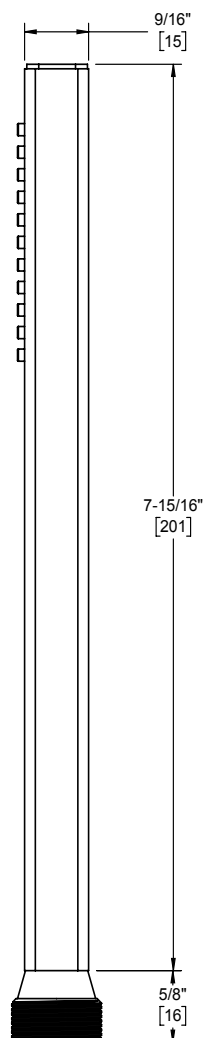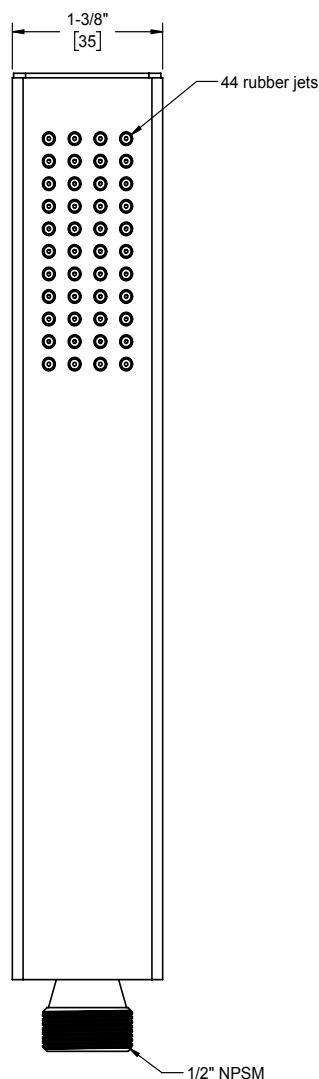

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

HS-72.FR\_sp\_210312



# **Morro Bay**<sup>®</sup>

**StyleTherm**<sup>®</sup> Trim Only

**TO-THFN-77**



## Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- 100°F safety stop button with manual override
- Engraved brass temperature ring
- Separate volume control required

## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016
- ADA compliant

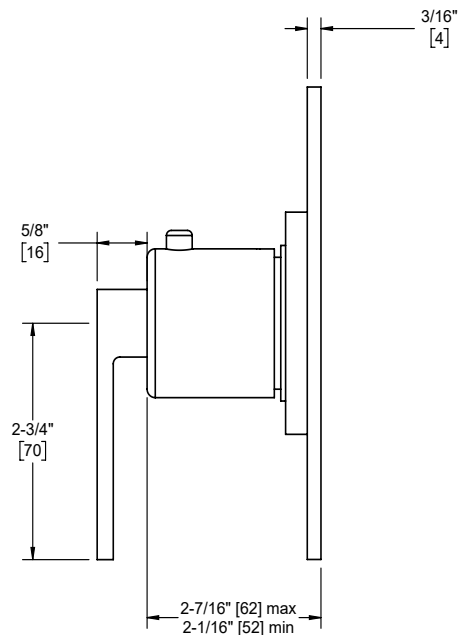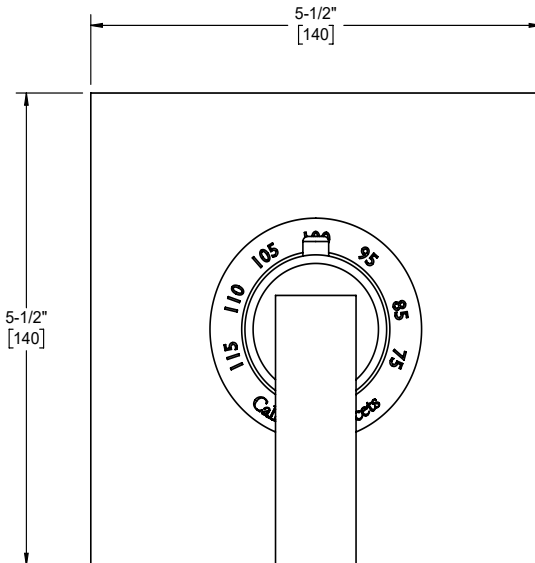

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



**California Faucets®**

**StyleTherm®**


**3/4" Thermostatic Rough Valve**

**THT75-R**

### Features

- Forged brass valve body construction
- Max flow rate: 11.0 gpm (41.6 L/m) @ 60 psi
- Integral service stops with check valves
- Single-handle temperature mixing
- Thermostatic anti-scald protection
- Genuine Vernet® mixing cartridge featuring
  - Polymer construction limits limescale build-up
  - Integrated filter screens
  - Paraffin wax element

**NOTE:** Requires separate shut-off/volume control valve(s)




### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1-2005/CSA B125.1-05
- ASSE 1016

mudguard not shown

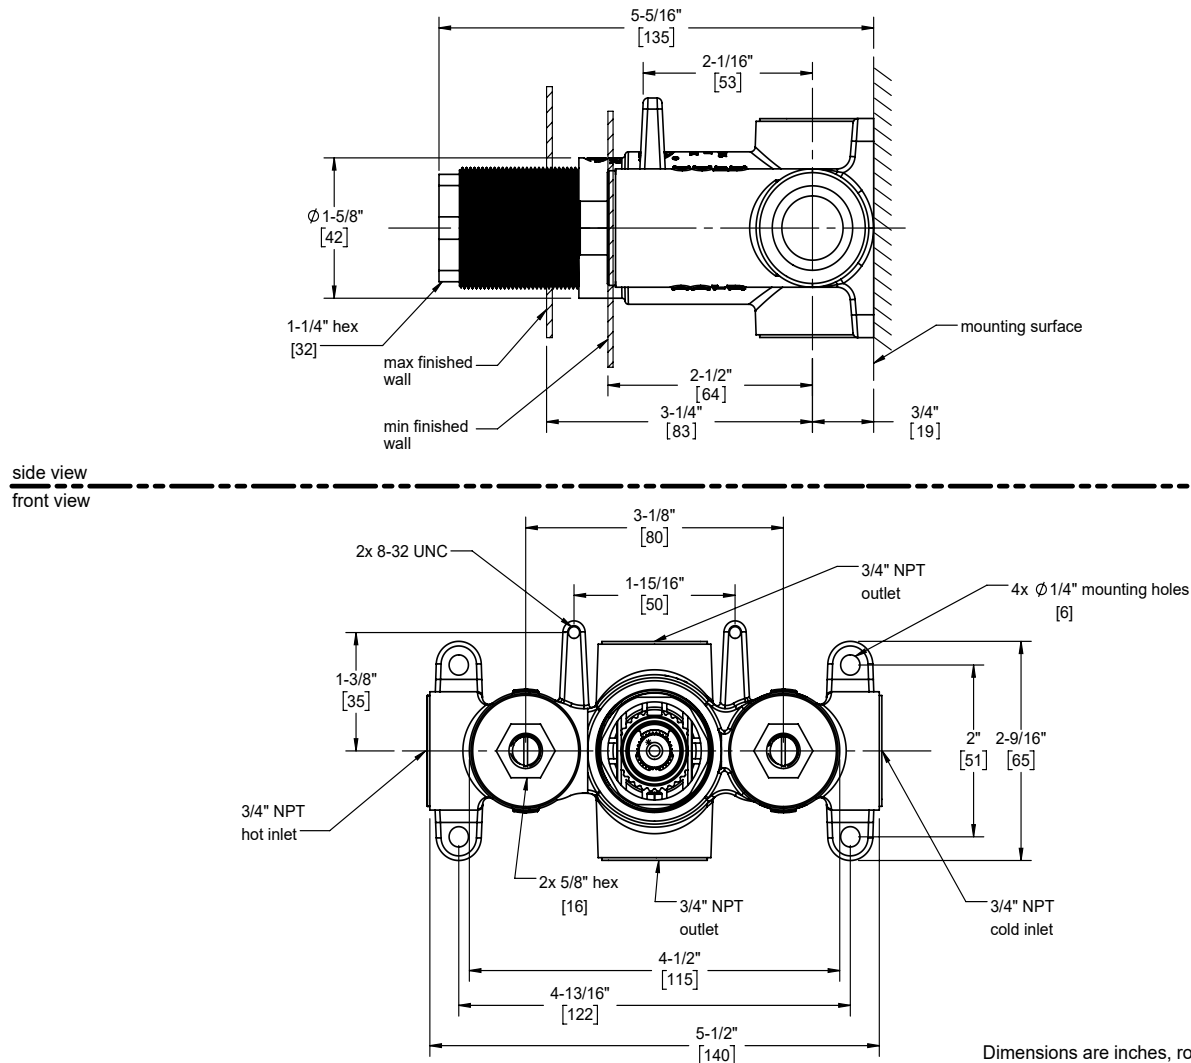

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



# ***Morro Bay™***

**WALL OR DECK HANDLE TRIM ONLY**




**TO-77-W**

## Features

- Base dimension 2-1/4" x 2-1/4"
- Use for wall stop, wall diverter or deck diverter
- Solid brass construction
- Rough valve sold separately (50-W-R, 75-W-R, WDV-R, DDV-R)
- Over 30 finishes including 15 PVD finishes

## Codes/Standards Applicable

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1

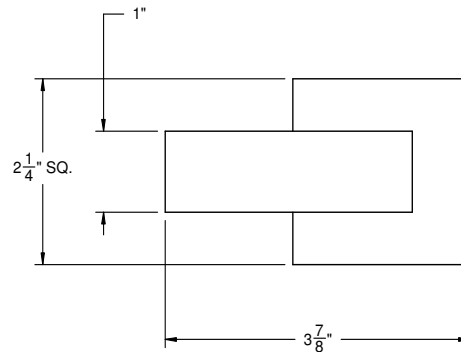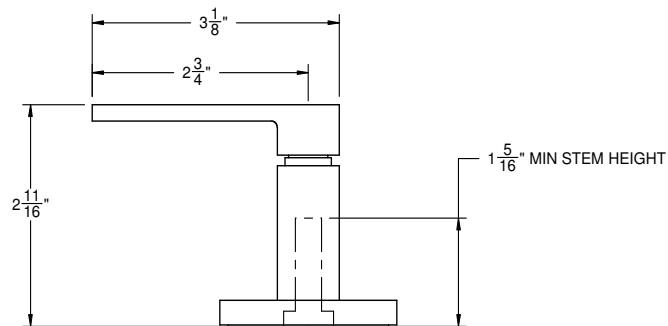

ALL DIMENSIONS SHOWN TO NEAREST 1/16"

**California Faucets®**  
800.822.8855 californiafaucets.com

## 50-W-R or 75-W-R WATER FLOW

How to determine proper installation, water flow direction, of installed in-wall shut-off/volume control valve(s).

**WARNING:** Prior to removing ceramic disc cartridge from valve body all water supplies to the valve(s) must be turned off. There can be NO water flow to the valve(s).

**Photo 1** – shows arrow on side of valve to indicate proper water flow direction.


This shows how water MUST be plumbed to valve body inlet and outlet ports. If this water flow direction is NOT followed the valve MUST be reinstalled.



**Photo 2** – shows the cartridge cavity for incoming and outgoing waterways.

Two (2) arrows show where water ENTERS cavity

One (1) arrow shows water EXITS cavity

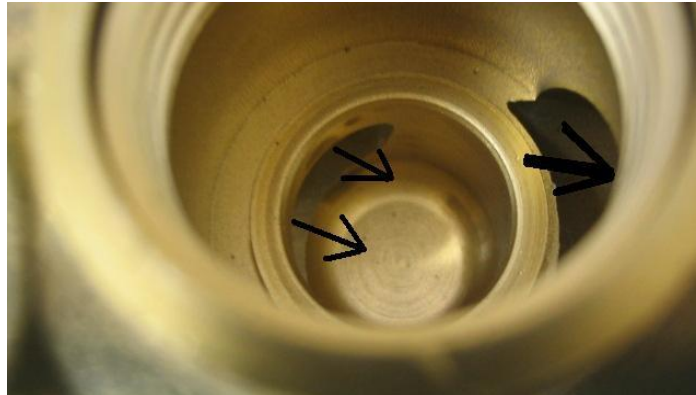


**Photo 3** – shows top view of valve body indicating water flow direction as related to body's ports and passage ways.

Inlet port is on left side of valve (as pictured) and connected to incoming water supply (e.g. therm valve)

Water enters at bottom portion of valve (1) cavity

Water exits at upper portion of valve (2) cavity


Outlet port is on right side of valve (as pictured) is connected to output device (e.g. showerhead)

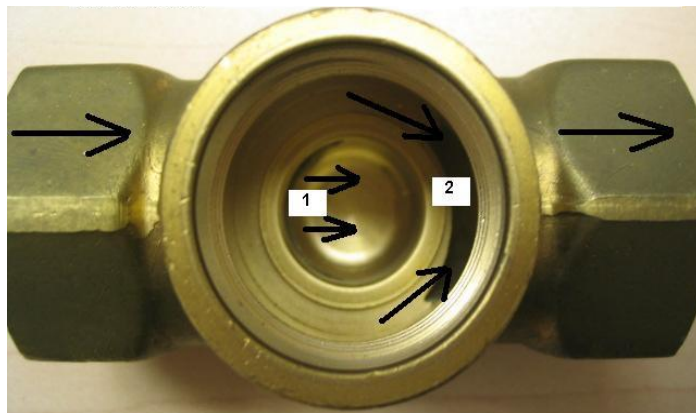

If the water flow is not correctly followed as described above, numerous problems can and will occur. The cartridge disc's will fail which may cause flooding and damage to residence. The possibility of failure increase the longer the valve is installed. Initial operation may function as intended, but as valve experiences numerous on/off cycles the water pressure will cause ceramic discs to separate, disengage from cartridge stem and/or crack. This failure is due to improper installation and IS NOT covered under warranty. It is the responsibility of the installer to properly install and verify all functions of valve(s) at the time of installation.

50-W-R\_ts\_131212

# ID Infinity Drain




## S-TIF 65 Site Sizable Series

- **S-TIF 6536 - 36" Complete Kit**
- **S-TIF 6548 - 48" Complete Kit**
- **S-TIF 6560 - 60" Complete Kit**
- **S-TIF 6572 - 72" Complete Kit**
- **S-TIF 6596 - 96" Complete Kit**

### Features

- 12 gauge, 304L stainless steel Tile Insert Frame
- Modify length and outlet location on site
- Indoor or outdoor use
- PVC Channel
- Works with 2" clamp down floor with 2" throat/strainer size *(not included)*
- **NOT INTENDED** for installation across a barrier-free threshold
- Compatible with: PVC Liner, Rubber Liner (Chloraloy®), Hot Mop, Lead Pan, Copper Pan, or Fiberglass
- Flow rate - 9 gpm per outlet
  - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
  - Additional outlets can be added and combined into a larger waste

### Installation

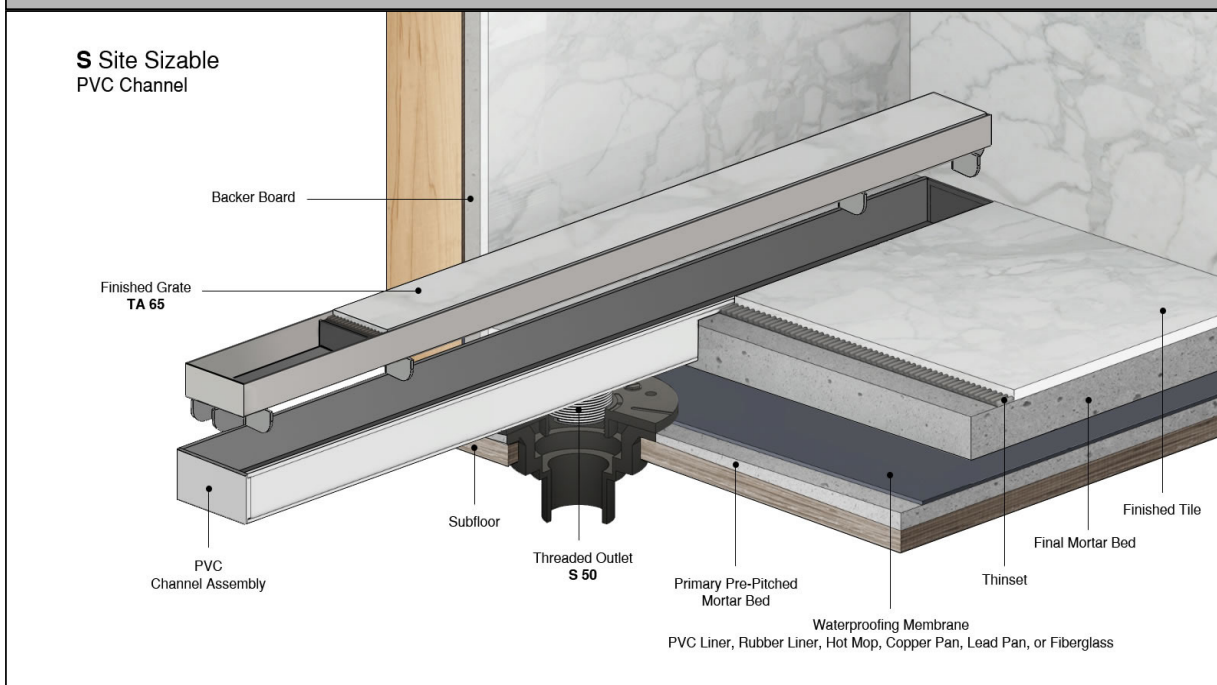

### Care & Maintenance


S-TIF 65 stainless steel linear drain top grates are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite Cleaner may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.infinitydrain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

# ID Infinity Drain

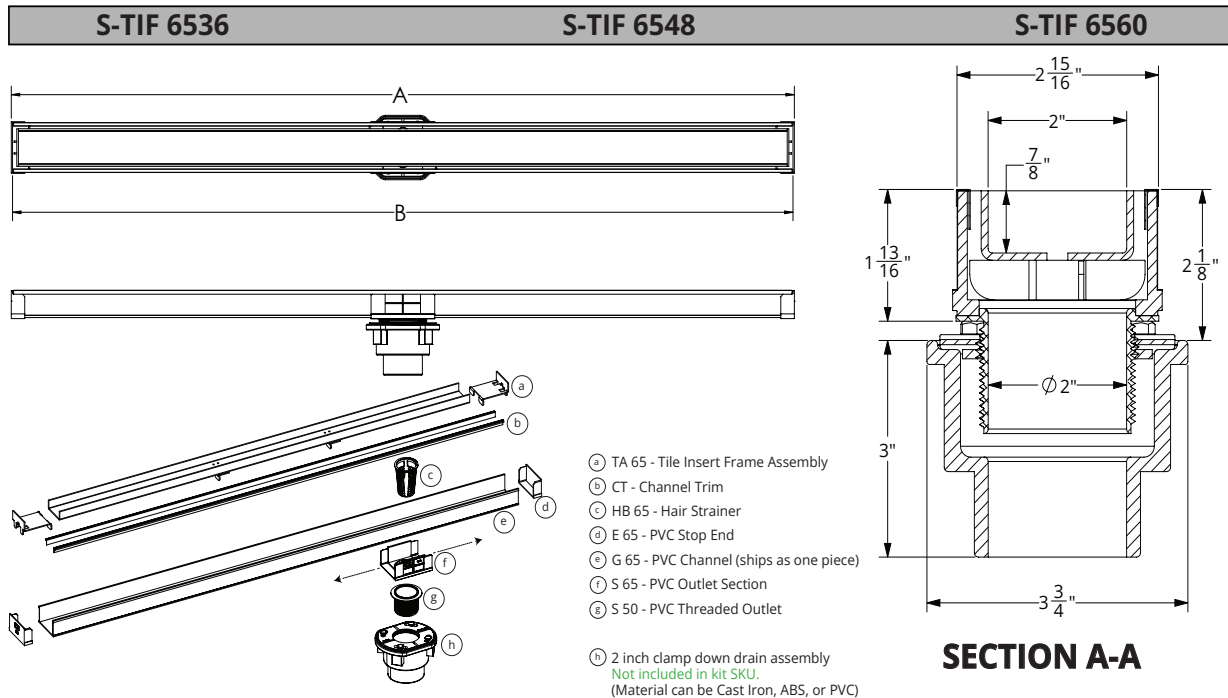

| Model Number | Complete Kit Contents                                                                                                                                                                                                                                                       | A<br>(Maximum Overall Length) | B<br>(Maximum Grate Length) |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------|
| S-TIF 6536   | 1 - TA 6536 Tile Insert Frame<br>1 - G 6536 PVC Channel<br>1 - CS 6536 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key                            | 36"                           | 35 7/8"                     |
| S-TIF 6548   | 1 - TA 6548 Tile Insert Frame<br>1 - G 6548 PVC Channel<br>1 - CS 6548 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key<br>2 - CT 48 Channel Trims | 48"                           | 47 7/8"                     |
| S-TIF 6560   | 1 - TA 6560 Tile Insert Frame<br>1 - G 6560 PVC Channel<br>1 - CS 6560 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key<br>2 - CT 60 Channel Trims | 60"                           | 59 7/8"                     |

## Finishes

- ☐ Satin Stainless (SS)   
 ☐ Polished Stainless (PS)   
 ☐ Oil Rubbed Bronze (ORB)   
 ☐ Satin Bronze (SB)   
 ☐ Matte Black (BK)  
☐ Satin Champagne (SC)   
 ☐ Polished Gold (PG)   
 ☐ Polished Brass (PB)   
 ☐ Gunmetal (GM)   
 ☐ Matte White (MW)

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.Infinitydrain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FM017-12-24



Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superceded or void data.

Page 2 of 3

# ID Infinity Drain

## S-TIF 6572

## S-TIF 6596

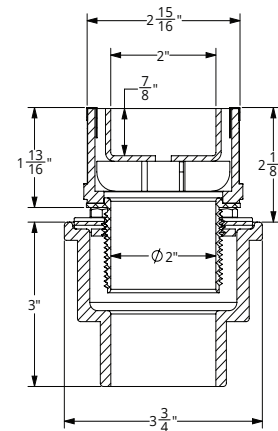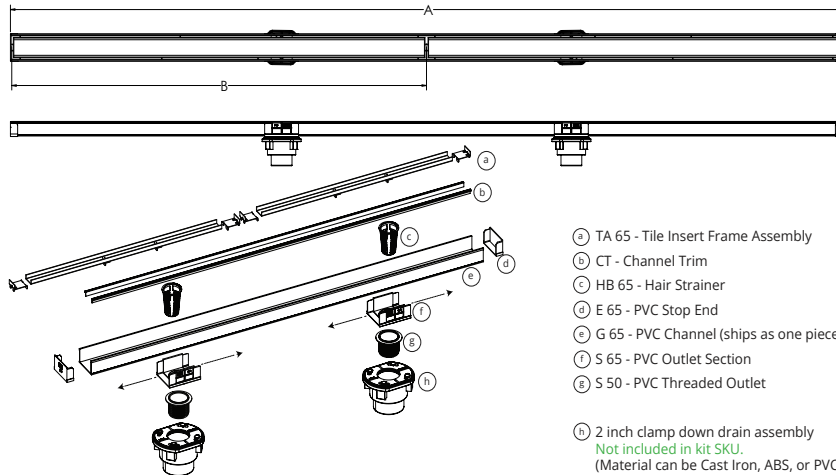

### SECTION A-A

| Model Number | Complete Kit Contents                                                                                                                                                                                                                                  | A<br>(Maximum Overall Length) | B<br>(Maximum Grate Length) |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------|
| S-TIF 6572   | 2 - TA 6536 Tile Insert Frames<br>1 - G 6536 PVC Channel<br>1 - CS 6536 Channel Spacer<br>2 - E 65 PVC Stop Ends<br>2 - S 65 PVC Outlet Sections<br>2 - S 50 PVC Threaded Outlets<br>1 - HMK-65-2A:<br>2 - HB 65 Hair Baskets<br>1 - AKEY Lift Out Key | 72"                           | 35 7/8"<br>(x 2)            |
| S-TIF 6596   | 2 - TA 6548 Tile Insert Frames<br>1 - G 6596 PVC Channel<br>2 - CS 6580 Channel Spacer<br>2 - E 65 PVC Stop Ends<br>2 - S 65 PVC Outlet Sections<br>2 - S 50 PVC Threaded Outlets<br>1 - HMK-65-2A:<br>2 - HB 65 Hair Baskets<br>1 - AKEY Lift Out Key | 96"                           | 47 7/8"<br>(x 2)            |

### Optional Components

|        |                                                                          |
|--------|--------------------------------------------------------------------------|
| F 65   | PVC Non-Threaded Outlet                                                  |
| GJC 65 | PVC Straight Joiner Strip                                                |
| GAM 65 | PVC 90° Angle Joiner                                                     |
| TNRN-P | PVC Threaded Extension Nipple                                            |
| UCP 2  | Universal 2" Clamping Plate                                              |
| UCP 4  | Universal 4" Clamping Plate                                              |
| UCP 42 | Universal Reducing Plate<br>(Adapts 4" or 3" existing throat size to 2") |

### Available components for longer lengths

|         |                       |       |                     |
|---------|-----------------------|-------|---------------------|
| TA 6536 | 36" Tile Insert Frame | E 65  | PVC Stop End        |
| TA 6548 | 48" Tile Insert Frame | S 50  | PVC Threaded Nipple |
| TA 6560 | 60" Tile Insert Frame | CT 36 | 36" Channel Trim    |
| G 6536  | 36" PVC Channel       | CT 48 | 48" Channel Trim    |
| G 6548  | 48" PVC Channel       | CT 60 | 60" Channel Trim    |
| G 6560  | 60" PVC Channel       | CT 96 | 96" Channel Trim    |
| G 6596  | 96" PVC Channel       |       |                     |
| G 6580  | 80" PVC Channel       |       |                     |
| G 65108 | 108" PVC Channel      |       |                     |

NOTE: For indoor applications and outdoor applications where exposure to users without footwear is possible Channel trim (CT) is not recommended on drains over 96" or drains with configurations that include turns. The installation of channel trim on site sizeable linear drains that fall within the outlined conditions listed are at the judgement of the installer, independent of Infinity Drain, LTD.

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.Infinitydrain.com  
FM017-12-24



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superceded or void data.

Page 3 of 3

| VENDOR PART    | VENDOR             | DESCRIPTION                                                           | PAGE |
|----------------|--------------------|-----------------------------------------------------------------------|------|
| TO-V7701-9-SN  | California Faucets | Morro Bay Single Handle Lavatory Wall Faucet Trim Only - Satin Nickel | 40   |
| SHV-R          | California Faucets | Single Handle Lavatory Wall Rough In Valve                            | 41   |
| SN7631M#01     | Toto               | Eco Soire Washlet G5A Integrated Toilet Top Unit - Cotton White       | 42   |
| CT7631CEMFG#01 | Toto               | Eco Soire Washlet G5A Integrated Toilet Bowl Unit - Cotton White      | 44   |
| 77-TR-SN       | California Faucets | Morro Bay Towel Ring - Satin Nickel                                   | 46   |
| 77-STP-SN      | California Faucets | Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel | 47   |



**California Faucets®**

***Mendocino™***

***Single Handle Lavatory Wall Faucet Trim Only***

## Features


- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Single handle allows for volume & temperature control at any position
- 1.2gpm (4.5 L/min) max flow rate
- Rough valve (SHV-R) sold separately

**TO-V7701-9**


## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant

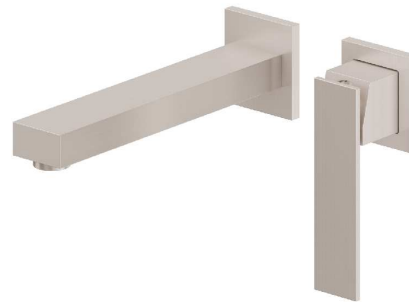

TO-V7701-9-SN shown

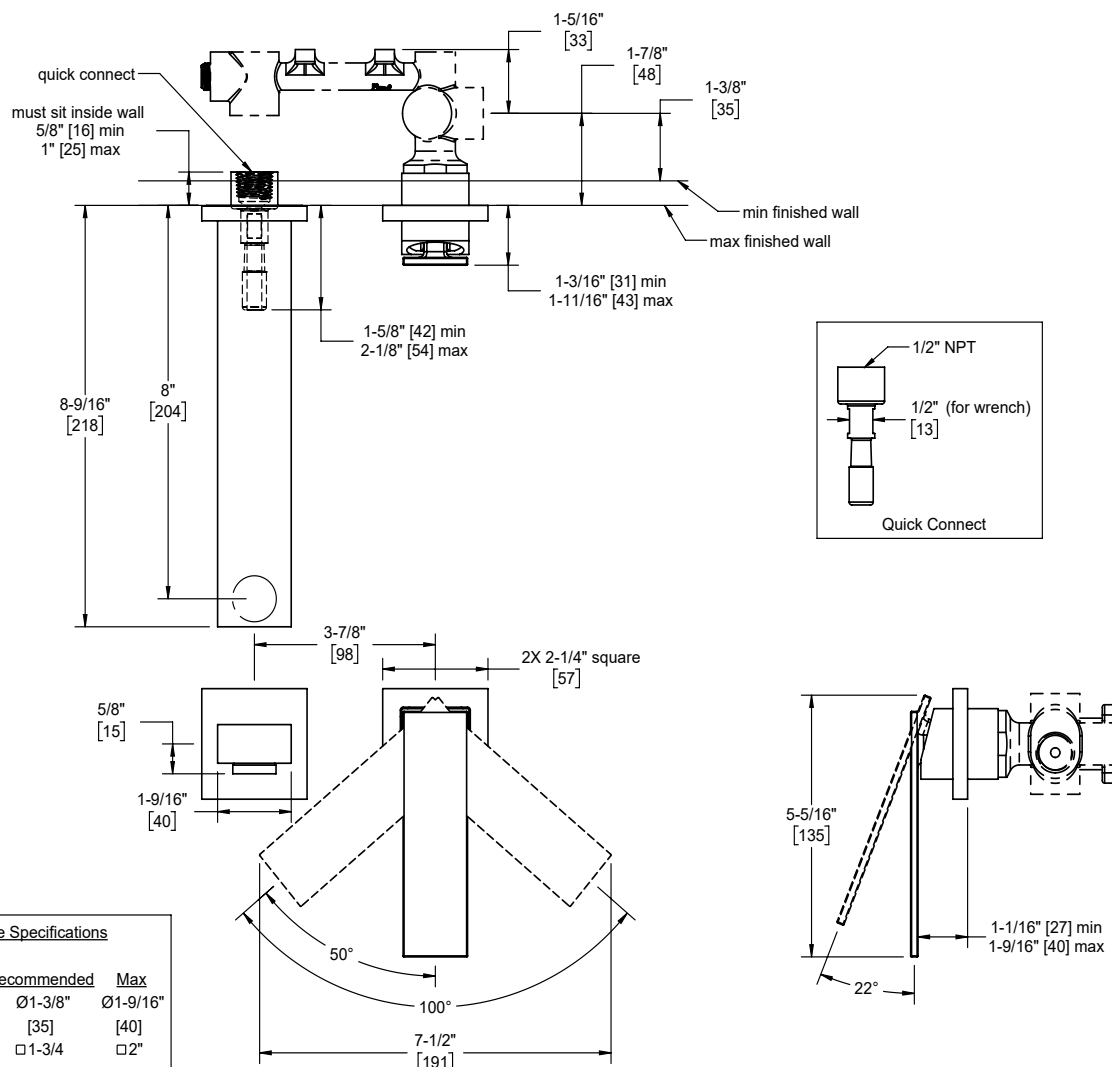

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



**California Faucets®**

# **Rough Valve**

**Single Handle Lavatory Wall Faucet Rough Valve**

## Features


- Forged brass construction
- Ceramic mixing cartridge
- 1/2" FIP - 2 inlet
- 1/2" FIP outlet

## Codes/Standards Applicable



Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372
- Commonwealth of MA


**SHV-R**





SHV-R shown  
with mudguard removed

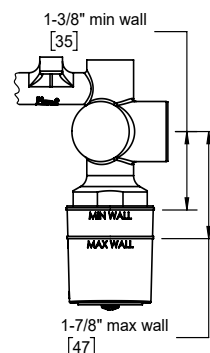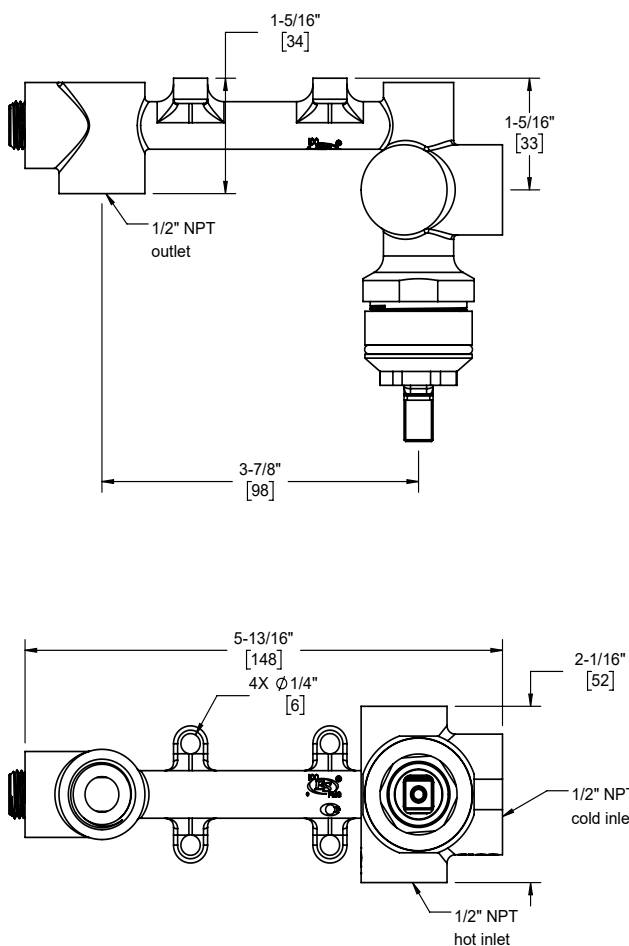

Round Handle Mudguard

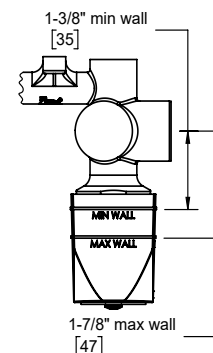

Square Handle Mudguard



**IMPORTANT:**  
MUDGUARD MUST BE INSTALLED ACCORDING TO TRIM STYLE.  
FOR ROUND TRIM USE ROUND MUDGUARD.  
FOR SQUARE TRIM USE SQUARE MUDGUARD.  
CUT TABS AS CLOSE TO EACH MUDGUARD SIDE AS POSSIBLE

**TOTO®**

**MS7631CEMFG**

## WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF

### FEATURES

- High-efficiency dual flush functionality 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF)
- TORNADO FLUSH® system utilizes 360° cleaning power to reach every part of the hole-free rim design bowl
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction remote control with 4-users personalized memory settings
- Universal Height, ADA compliant
- Night light

### COMPONENTS

- SN7631M - Top Unit
- CT7631CEMFG - Elongated Bowl Unit

### COLORS/FINISHES

- #01 Cotton

### PRODUCT SPECIFICATION

The WASHLET G5A with the TORNADO FLUSH system toilet shall be 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF). Toilet shall have CEFIONTECT ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS7631CEMFG#01.



**TORNADO FLUSH**



**WASHLET**



**CEFIONTECT**



**PREMIST**

### CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others
- ADA Compliant
- Complies with CA Prop 65 warning requirements



**CALGreen**

## MS7631CEMFG

### WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF


#### SPECIFICATIONS

|                              |                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Water Use</b>             | 1.2 GPF / 1.0 GPF<br>(4.5 LPF / 3.8 LPF)                                                            |
| <b>Flush System</b>          | TORNADO FLUSH®                                                                                      |
| <b>Water Pressure</b>        | Min: 7.25 PSI (0.05MPa) Flowing<br>Max: 108.75 PSI (0.75MPa) Static                                 |
| <b>Water Surface</b>         | 8-5/8" x 7-1/4"                                                                                     |
| <b>Trap Diameter</b>         | 2" (51 mm)                                                                                          |
| <b>Trap Seal</b>             | 2-1/8" (54 mm)                                                                                      |
| <b>Rough-in</b>              | 12"                                                                                                 |
| <b>Warranty</b>              | One Year Limited (Residential)<br>One Year Limited (Commercial)                                     |
| <b>Material</b>              | Bowl: Vitreous China<br>Seat + Cover: Plastic                                                       |
| <b>Shipping Weight</b>       | SN7631M: 19 lbs<br>CT7631CEMFG: 94 lbs                                                              |
| <b>Shipping Dimensions</b>   | SN7631M:<br>31-3/16" L x 17-1/2" W x 10-3/4" H<br>CT7631CEMFG:<br>31-5/8" L x 15-3/4" W x 22-5/8" H |
| <b>Power Rating</b>          | AC 120 V, 60 Hz, 1276 W                                                                             |
| <b>Power Cord Length</b>     | 3.9ft                                                                                               |
| <b>Water Pressure</b>        | Min: 7.25 PSI (0.05MPa) Flowing<br>Max: 108.75 PSI (0.75MPa) Static                                 |
| <b>Drying Feature</b>        | Air Temperature:<br>Approx. 95°F - 140°F (35°C - 60°C)                                              |
| <b>Rear Washing</b>          | Approx. 0.07 - 0.11 gal/min                                                                         |
| <b>Rear Soft Washing</b>     | Approx. 0.07 - 0.11 gal/min                                                                         |
| <b>Front Washing</b>         | Approx. 0.08 - 0.11 gal/min                                                                         |
| <b>Washing Spray Feature</b> | Approx. 95°F - 104°F (35°C - 40°C)                                                                  |
| <b>Safety Feature</b>        | Temperature Fuse                                                                                    |
| <b>Drying Feature</b>        | Air Temperature: Approx. 95°F - 140°F<br>(35°C - 60°C)                                              |
| <b>Airflow Volume</b>        | 8.83 ft3/min                                                                                        |
| <b>Dryer Safety Feature</b>  | Temperature Fuse                                                                                    |
| <b>Seat Warming Feature</b>  | Surface Temperature: Approx. 82°F -<br>97°F (28°C - 36°C)                                           |
| <b>Seat Heater Capacity</b>  | 50 W                                                                                                |
| <b>Air Volume</b>            | Normal mode: Approx. 3.17 ft3/min <br>Power mode: Approx. 5.65 ft3/min                              |
| <b>Air Purifying Feature</b> | O <sub>2</sub> Deodorizer                                                                           |
| <b>Ambient Temp.</b>         | 32°F - 104°F (0°C - 40°C)                                                                           |
| <b>Size</b>                  | 28-7/16" L x 15-1/4" W x 22-3/8" H                                                                  |
| <b>Weight</b>                | 99lbs                                                                                               |

#### INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.
- The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.
- Consult local electric code for GFCI location and installation requirements.

#### DIMENSIONS

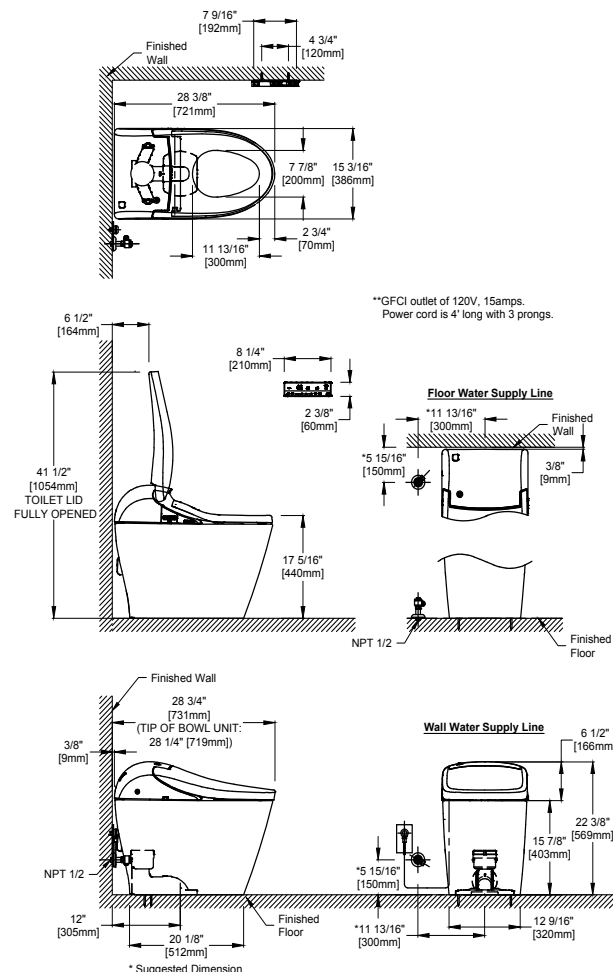

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02260 v.03

**TOTO®**

**MS7631CEMFG**

## WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF

### FEATURES

- Compact, modern one-piece skirted Smart Bidet Toilet with integrated personal cleansing and comfort features, with decorative silver trim
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- High-efficiency TORNADO FLUSH® system - 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF)
- Auto flush - with back-up manual flush for power outages
- Universal Height, ADA compliant
- Touchless auto open/close lid
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Gentle aerated, warm water, front and rear spray with oscillating and pulsating features
- Adjustable spray position, water temperature, and water pressure
- Instantaneous water heater for continuous warm water and energy savings
- Warm air dryer with three variable temperature settings
- Automatic air deodorizer
- Multifunction remote control with personalized memory settings for up to 4 users
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- CLEAN LIFT allows easy cleaning between the top and bowl unit
- Night light illuminates the inside of the bowl
- Automatic and programmable energy saving systems

### COMPONENTS

- SN7631M - Top Unit
- CT7631CEMFG - Elongated Bowl Unit

### COLOR/FINISHES

- #01 Cotton



WASHLET



PREMIST



TORNADO FLUSH



AUTO FLUSH



EWATER



UNIVERSAL HEIGHT



CEFIONTECT



SKIRTED DESIGN

### PRODUCT SPECIFICATION

The WASHLET G5A with the TORNADO FLUSH system toilet shall be 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF). Toilet shall have CEFIONTECT ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS7631CEMFG#01.

### CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/ CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others
- ADA Compliant
- Complies with CA Prop 65 warning requirements



**CALGreen**

## MS7631CEMFG

### WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF


#### SPECIFICATIONS

|                                  |                                                                                                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Water Use</b>                 | 1.2 GPF / 1.0 GPF<br>(4.5 LPF / 3.8 LPF)                                                            |
| <b>Flush System</b>              | TORNADO FLUSH®                                                                                      |
| <b>Water Pressure</b>            | Min: 7.25 PSI (0.05MPa) Flowing<br>Max: 108.75 PSI (0.75MPa) Static                                 |
| <b>Water Surface</b>             | 8-5/8" x 7-1/4"                                                                                     |
| <b>Trap Diameter</b>             | 2" (51 mm)                                                                                          |
| <b>Rough-in</b>                  | 12"                                                                                                 |
| <b>Trap Seal</b>                 | 2-1/8" (54 mm)                                                                                      |
| <b>Warranty</b>                  | One Year Limited (Residential)<br>One Year Limited (Commercial)                                     |
| <b>Material</b>                  | Bowl: Vitreous China<br>Seat + Cover: Plastic                                                       |
| <b>Power Rating</b>              | AC 120 V, 60 Hz, 1276 W                                                                             |
| <b>Power Cord Length</b>         | 3.9ft (1.2m)                                                                                        |
| <b>Rear Washing</b>              | Approx. 0.07- 0.11 gal/min                                                                          |
| <b>Rear Soft Washing</b>         | Approx. 0.07- 0.11 gal/min                                                                          |
| <b>Front Washing</b>             | Approx. 0.08 - 0.11 gal/min                                                                         |
| <b>Washing Spray Temperature</b> | 95°F - 104°F (35°C - 40°C)                                                                          |
| <b>Safety Feature</b>            | Temperature Fuse                                                                                    |
| <b>Drying Feature</b>            | Air Temperature:<br>Approx. 95°F - 140°F (35°C - 60°C)                                              |
| <b>Airflow Volume</b>            | 8.83 ft3/min                                                                                        |
| <b>Dryer Safety Feature</b>      | Temperature Fuse                                                                                    |
| <b>Seat Warming Feature</b>      | Surface Temperature:<br>Approx. 82°F - 97°F (28°C - 36°C)                                           |
| <b>Seat Heater Capacity</b>      | 50 W                                                                                                |
| <b>Seat Safety Feature</b>       | Temperature Fuse                                                                                    |
| <b>Air Purifying Feature</b>     | O2 Deodorizer                                                                                       |
| <b>Ambient Temperature Range</b> | 32°F - 104°F (0°C - 40°C)                                                                           |
| <b>Shipping Weight</b>           | SN7631M: 19 lbs<br>CT7631CEMFG: 94 lbs                                                              |
| <b>Shipping Dimensions</b>       | SN7631M:<br>31-3/16" L x 17-1/2" W x 10-3/4" H<br>CT7631CEMFG:<br>31-5/8" L x 15-3/4" W x 22-5/8" H |

#### INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.
- The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.
- Consult local electric code for GFCI location and installation requirements.

#### DIMENSIONS

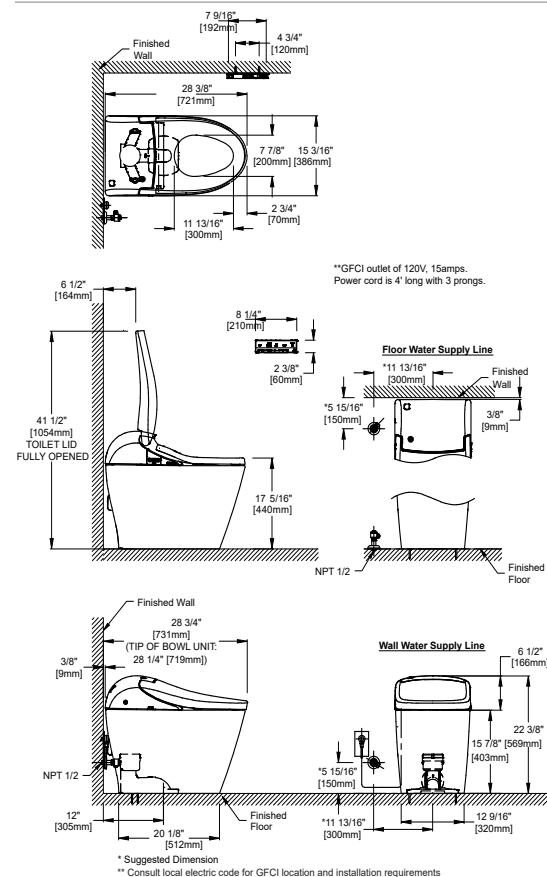

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02260 v.06




# **Morro Bay™**

## **Towel Ring**

**77-TR**

### Features



- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



### Codes/Standards

Product meets or exceeds the following:

- None applicable

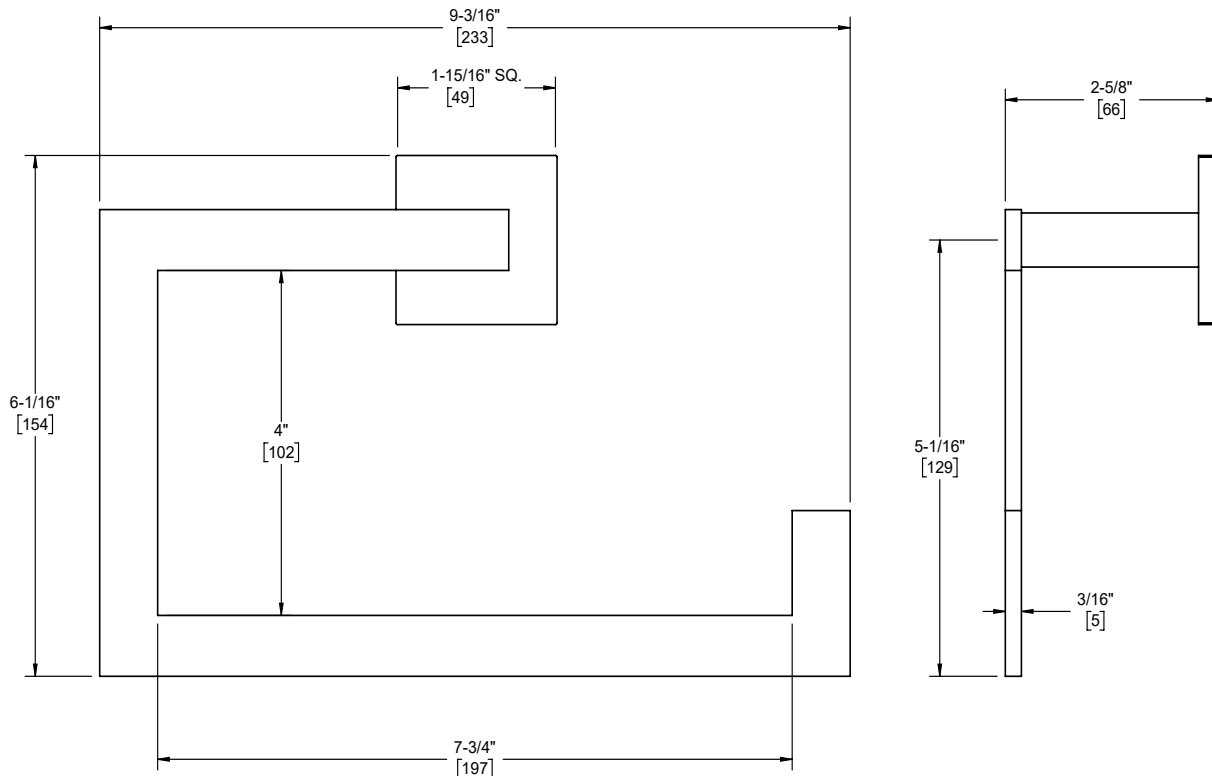

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-TR\_sp\_212707



# ***Morro Bay™***

## ***Single Post Paper / Towel Holder***

### Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware




**77-STP**



### Codes/Standards

Product meets or exceeds the following:

- None applicable

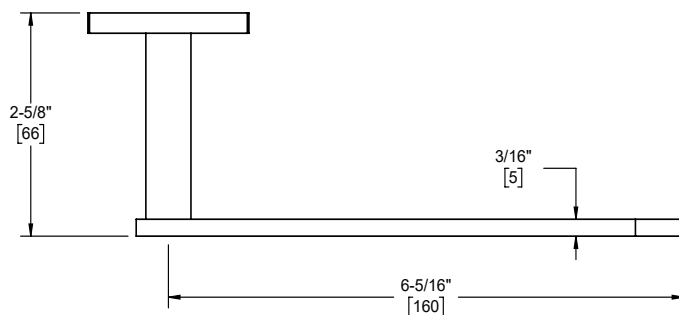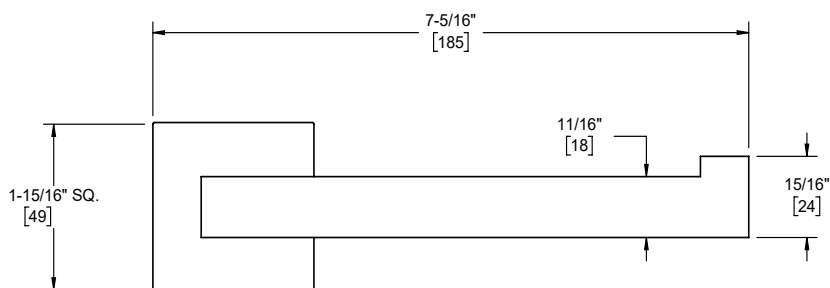

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-STP\_sp\_212707

| <b>VENDOR PART</b>   | <b>VENDOR</b>             | <b>DESCRIPTION</b>                                                                     | <b>PAGE</b> |
|----------------------|---------------------------|----------------------------------------------------------------------------------------|-------------|
| <b>7702-SN</b>       | <b>California Faucets</b> | <b>Morro Bay 8" Widespread Lavatory Faucet - Satin Nickel</b>                          | <b>50</b>   |
| <b>CT9538CEFG#01</b> | <b>Toto</b>               | <b>Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Bowl Unit - Cotton White</b> | <b>51</b>   |
| <b>SN9538M#01</b>    | <b>Toto</b>               | <b>Neorest WX1 Dual Flush 1.2 Or 0.8 GPF Wall Hung Toilet Top Unit - Cotton White</b>  | <b>54</b>   |
| <b>WT175MA</b>       | <b>Toto</b>               | <b>Neorest 1.2 Or 0.8 Gpf Dual Flush In-Wall Tank Unit</b>                             | <b>57</b>   |
| <b>77-TR-SN</b>      | <b>California Faucets</b> | <b>Morro Bay Towel Ring - Satin Nickel</b>                                             | <b>60</b>   |
| <b>77-STP-SN</b>     | <b>California Faucets</b> | <b>Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel</b>           | <b>61</b>   |
| <b>77-RH-SN</b>      | <b>California Faucets</b> | <b>Morro Bay Robe Hook - Satin Nickel</b>                                              | <b>62</b>   |
| <b>SH-1414.18-SN</b> | <b>California Faucets</b> | <b>Rainscape Rainscape 14" X 14" Recessed Showerhead - Satin Nickel</b>                | <b>63</b>   |
| <b>9126-78-SN</b>    | <b>California Faucets</b> | <b>Terra Mar Wall Mounted Handshower Kit, Rectangle Base - Satin Nickel</b>            | <b>N/A</b>  |
| <b>HS-72.18-SN</b>   | <b>California Faucets</b> | <b>Contemporary Handshower - Satin Nickel</b>                                          | <b>64</b>   |

|                      |                           |                                                                                          |           |
|----------------------|---------------------------|------------------------------------------------------------------------------------------|-----------|
| <b>TO-THFN-77-SN</b> | <b>California Faucets</b> | <b>Morro Bay StyleTherm 3/4" Thermostatic Trim Only - Satin Nickel</b>                   | <b>65</b> |
| <b>THT75-R</b>       | <b>California Faucets</b> | <b>StyleTherm 3/4" Rough Valve</b>                                                       | <b>66</b> |
| <b>TO-77-W-SN</b>    | <b>California Faucets</b> | <b>Morro Bay Wall or Deck Handle Trim Only - Satin Nickel</b>                            | <b>67</b> |
| <b>75-W-R</b>        | <b>California Faucets</b> | <b>3/4" Wall Stop Valve Only</b>                                                         | <b>68</b> |
| <b>STIF6536SS</b>    | <b>Infinity Drain</b>     | <b>Site Sizable Series 36" Pvc Complete Kit With Tile Insert Frame - Satin Stainless</b> | <b>69</b> |



# Morro Bay™

## WIDESPREAD LAVATORY FAUCET

7702


### Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 5-1/2" [140] spout center to center
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- Ø 1-1/4" all brass touch style pop up drain assembly
- 1.2 gpm (4.5 L/m) max flow rate




### Codes/Standards Applicable

Meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA
- ADA compliant

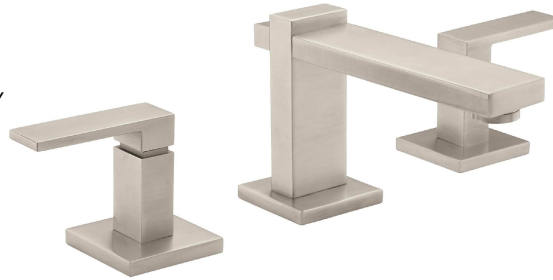

7702 shown

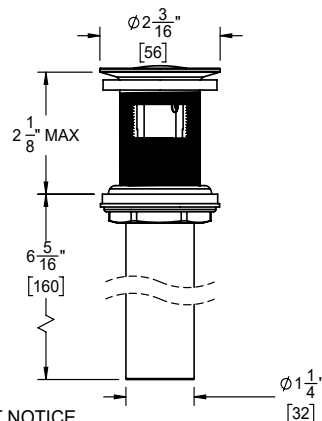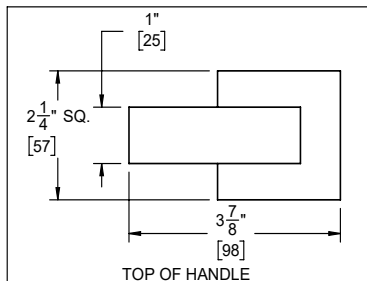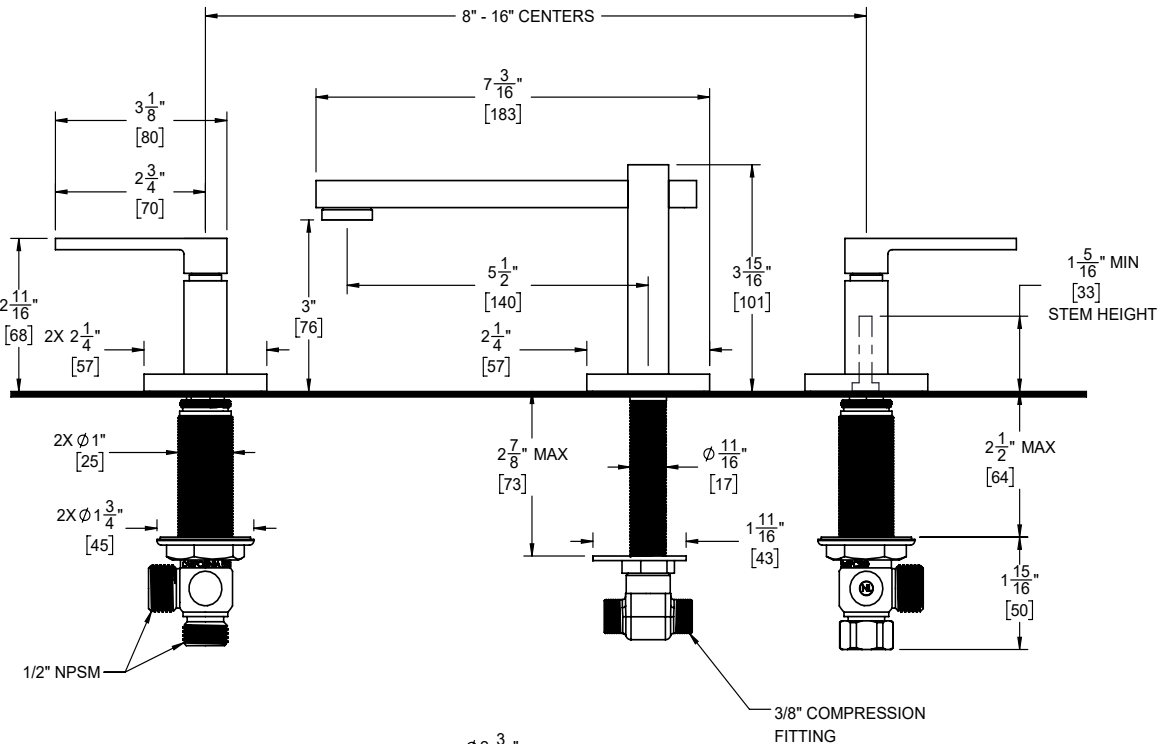

| THROUGH-HOLE SPECIFICATIONS |               |               |
|-----------------------------|---------------|---------------|
| MIN                         | RECOMMENDED   | MAX           |
| SPOUT: Ø 1-1/8" [29]        | Ø 1-3/8" [35] | Ø 1-1/2" [38] |
| VALVE: Ø 1" [25]            | Ø 1-3/8" [35] | Ø 1-1/2" [38] |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS SHOWN TO NEAREST 1/16"  
[DIMENSIONS SHOWN TO NEAREST 1mm]

**TOTO®**

**CWT9538CEMFG**

**NEOREST® WX1**  
**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

**FEATURES**

**NEOREST WX1**

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

**NEOREST In-Wall Tank Unit**

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

**MODELS**

- **CT9538CEFG#01**  
Bowl Unit
- **SN9538M#01**  
Top Unit
- **WT175MA**  
In-Wall Tank System (Copper Pipe)
- **YT990#N**  
Nickel Push Plate



-  **TORNADO FLUSH**
-  **EWATER+**
-  **CEFIONTECT**
-  **Auto Flush**
-  **UNIVERSAL HEIGHT**
-  **Skirted Design**

**COLORS/FINISHES**

- #01 Cotton

**CODES/STANDARDS**

- Meets and exceeds:
  - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### SPECIFICATIONS




| CT9538CEFG          |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF)                                        |
| Flush System        | TORNADO FLUSH®                                                          |
| Water Pressure      | Minimum:<br>7.25 PSI (Dynamic)<br>Maximum:<br>108.75 PSI (Static)       |
| Water Surface       | 5-5/8" x 4-1/8"                                                         |
| Trap Diameter       | 2-1/4"                                                                  |
| Trap Seal           | 2"                                                                      |
| Warranty            | Three Year Limited<br>(Residential)<br>One Year Limited<br>(Commercial) |
| Material            | Bowl Unit: Vitreous China<br>Top Unit: Plastic                          |
| Shipping Weight     | 88.4 lbs                                                                |
| Shipping Dimensions | 31-1/4" x 18-3/8" x 19-1/4"                                             |

| SN9538M                 |                                                                                                                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating            | AC 120 V 60 Hz                                                                                                                                                                   |
| Power Consumption       | 1294 W                                                                                                                                                                           |
| Max Power Consumption   | 1452 W                                                                                                                                                                           |
| Power Cord Length       | 1.6 ft (0.5 m)                                                                                                                                                                   |
| Spray Volume            | Rear Cleansing:<br>0.08 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.08 – 0.11 gal/min<br>Front Cleansing:<br>0.08 – 0.11 gal/min<br>Wide Front Cleansing:<br>0.09 – 0.11 gal/min |
| Spray Features          | Adjustable Water Temp:<br>86 – 104 °F (30 – 40 °C)<br>Safety Device:<br>Temperature Fuse                                                                                         |
| Warm Air Dryer Features | Adjustable Air Temp:<br>95 – 140 °F (35 – 60 °C)<br>Airflow Volume:<br>8.83 ft³/min (0.25 m³/min)<br>Safety Device:<br>Temperature Fuse                                          |
| Heated Seat Features    | Adjustable Surface Temp:<br>82 – 97 °F (28 – 36 °C)<br>Safety Device:<br>Temperature Fuse                                                                                        |
| Ambient Temperature     | 32 – 104 °F (0 – 40 °C)                                                                                                                                                          |
| Shipping Weight         | 28.7 lbs                                                                                                                                                                         |
| Shipping Dimensions     | 31-1/4" x 20-5/8" x 9-7/8"                                                                                                                                                       |

| WT175MA             |                                  |
|---------------------|----------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF) |
| Flush System        | Dual Flushing                    |
| Min Water Pressure  | 8 PSI (static)                   |
| Max Water Pressure  | 108.75 PSI (static)              |
| Installation Height | 15" to 19"                       |
| Warranty            | One Year Limited                 |
| Material            | Various                          |
| Shipping Weight     | 44 lbs                           |
| Shipping Dimensions | 47-1/4" x 26-3/16" x 5-7/8"      |

#### DIMENSIONS



##### CT9538CEFG

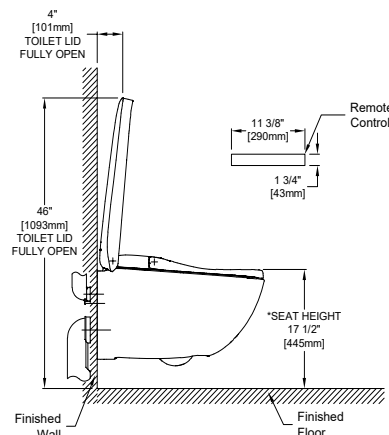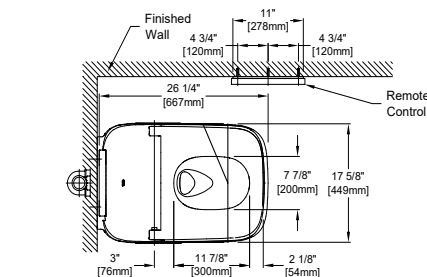

#### PRODUCT SPECIFICATION

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9538CEMFG#01.

Refer to the installation template included with the In Wall Tank for drilling the necessary holes




\* Suggested Dimension

## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### YT990

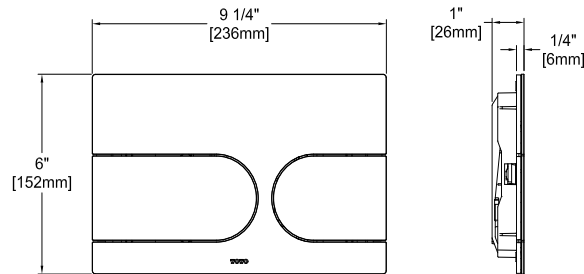

#### INSTALLATION NOTES

- WT175MA  
Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.


Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

For use with potable water only. Do not use with recycled water.

It is highly recommended to use a surge protector to prevent damage in the event of a power surge. The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

#### DIMENSIONS

##### WT175MA

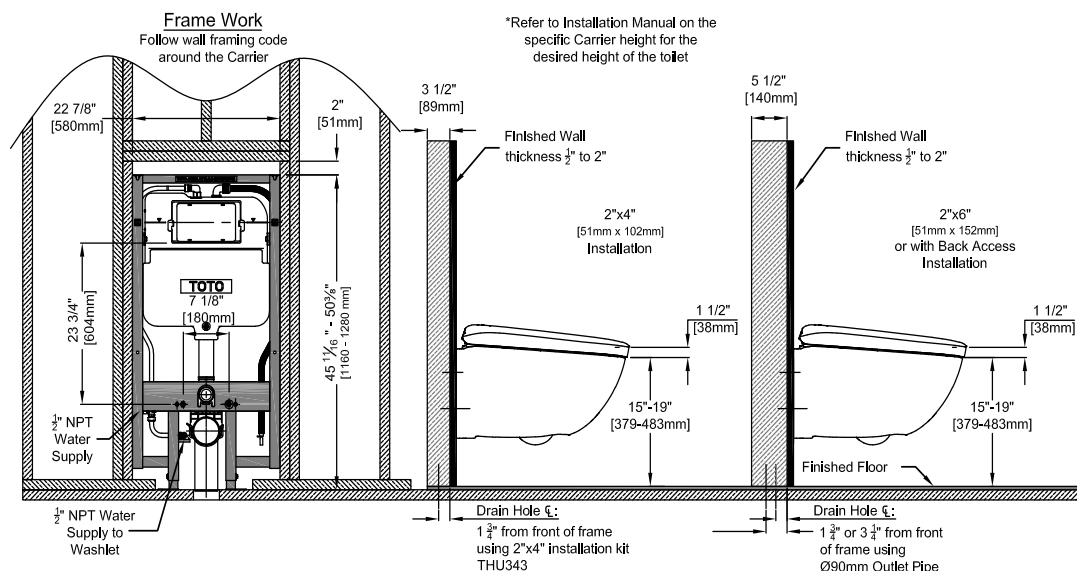

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02254 v.01

**TOTO®**

**CWT9538CEMFG**

**NEOREST® WX1**

**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

## FEATURES

### NEOREST WX1

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

### NEOREST In-Wall Tank Unit

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

## MODELS

- **CT9538CEFG#01**  
Bowl Unit
- **SN9538M#01**  
Top Unit
- **WT175MA**  
In-Wall Tank System (Copper Pipe)
- **YT990#N**  
Nickel Push Plate



-  **TORNADO FLUSH**
-  **EWATER+**
-  **CEFIONTECT**
-  **Auto Flush**
-  **UNIVERSAL HEIGHT**
-  **Skirted Design**

## COLORS/FINISHES

- #01 Cotton

## CODES/STANDARDS

- Meets and exceeds:
  - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### SPECIFICATIONS




| CT9538CEFG          |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF)                                        |
| Flush System        | TORNADO FLUSH®                                                          |
| Water Pressure      | Minimum:<br>7.25 PSI (Dynamic)<br>Maximum:<br>108.75 PSI (Static)       |
| Water Surface       | 5-5/8" x 4-1/8"                                                         |
| Trap Diameter       | 2-1/4"                                                                  |
| Trap Seal           | 2"                                                                      |
| Warranty            | Three Year Limited<br>(Residential)<br>One Year Limited<br>(Commercial) |
| Material            | Bowl Unit: Vitreous China<br>Top Unit: Plastic                          |
| Shipping Weight     | 88.4 lbs                                                                |
| Shipping Dimensions | 31-1/4" x 18-3/8" x 19-1/4"                                             |

| SN9538M                 |                                                                                                                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating            | AC 120 V 60 Hz                                                                                                                                                                   |
| Power Consumption       | 1294 W                                                                                                                                                                           |
| Max Power Consumption   | 1452 W                                                                                                                                                                           |
| Power Cord Length       | 1.6 ft (0.5 m)                                                                                                                                                                   |
| Spray Volume            | Rear Cleansing:<br>0.08 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.08 – 0.11 gal/min<br>Front Cleansing:<br>0.08 – 0.11 gal/min<br>Wide Front Cleansing:<br>0.09 – 0.11 gal/min |
| Spray Features          | Adjustable Water Temp:<br>86 – 104 °F (30 – 40 °C)<br>Safety Device:<br>Temperature Fuse                                                                                         |
| Warm Air Dryer Features | Adjustable Air Temp:<br>95 – 140 °F (35 – 60 °C)<br>Airflow Volume:<br>8.83 ft³/min (0.25 m³/min)<br>Safety Device:<br>Temperature Fuse                                          |
| Heated Seat Features    | Adjustable Surface Temp:<br>82 – 97 °F (28 – 36 °C)<br>Safety Device:<br>Temperature Fuse                                                                                        |
| Ambient Temperature     | 32 – 104 °F (0 – 40 °C)                                                                                                                                                          |
| Shipping Weight         | 28.7 lbs                                                                                                                                                                         |
| Shipping Dimensions     | 31-1/4" x 20-5/8" x 9-7/8"                                                                                                                                                       |

| WT175MA             |                                  |
|---------------------|----------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF) |
| Flush System        | Dual Flushing                    |
| Min Water Pressure  | 8 PSI (static)                   |
| Max Water Pressure  | 108.75 PSI (static)              |
| Installation Height | 15" to 19"                       |
| Warranty            | One Year Limited                 |
| Material            | Various                          |
| Shipping Weight     | 44 lbs                           |
| Shipping Dimensions | 47-1/4" x 26-3/16" x 5-7/8"      |

#### DIMENSIONS



##### CT9538CEFG

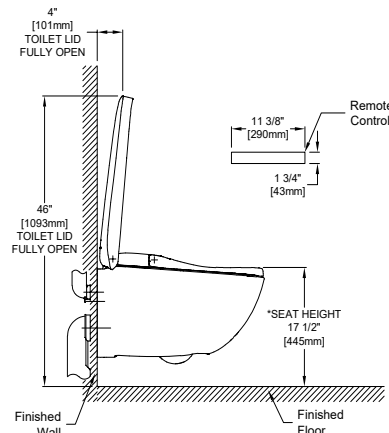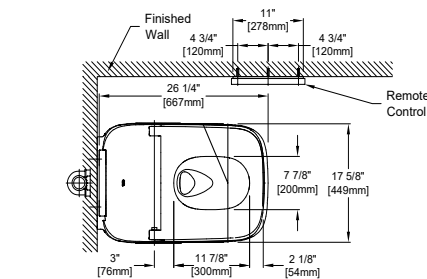

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9538CEMFG#01.

#### PRODUCT SPECIFICATION

Refer to the installation template included with the In Wall Tank for drilling the necessary holes




\* Suggested Dimension

## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### YT990

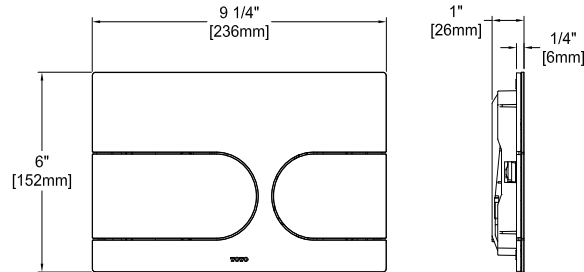

#### INSTALLATION NOTES

- WT175MA  
Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.


Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

For use with potable water only. Do not use with recycled water.

It is highly recommended to use a surge protector to prevent damage in the event of a power surge. The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

#### DIMENSIONS

##### WT175MA

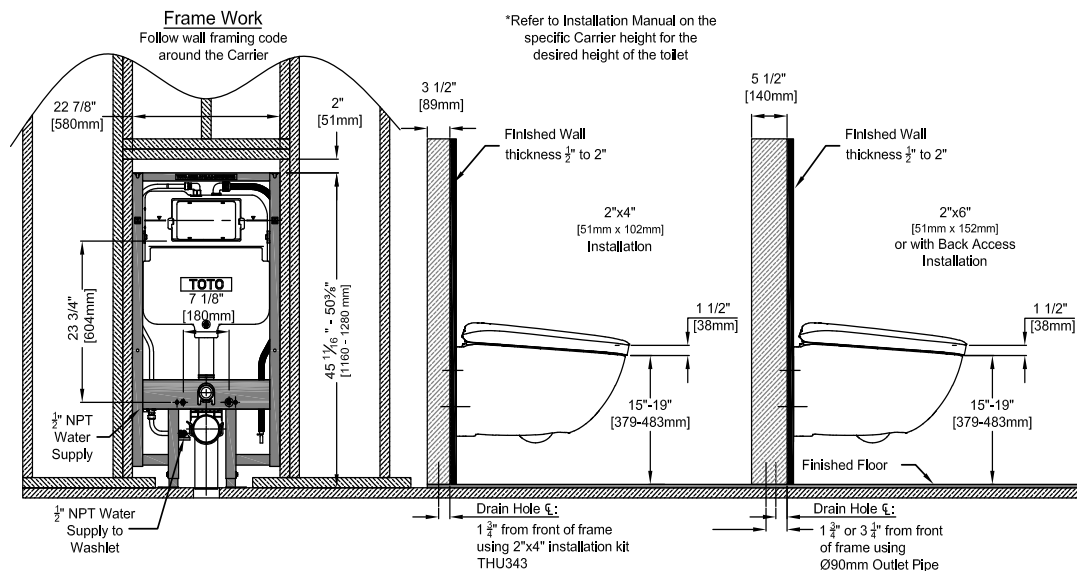

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02254 v.01

**TOTO®**

**CWT9538CEMFG**

**NEOREST® WX1**

**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

## FEATURES

### NEOREST WX1

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

### NEOREST In-Wall Tank Unit

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

## MODELS

- **CT9538CEFG#01**  
Bowl Unit
- **SN9538M#01**  
Top Unit
- **WT175MA**  
In-Wall Tank System (Copper Pipe)
- **YT990#N**  
Nickel Push Plate



-  **TORNADO FLUSH**
-  **EWATER+**
-  **CEFIONTECT**
-  **Auto Flush**
-  **UNIVERSAL HEIGHT**
-  **Skirted Design**

## COLORS/FINISHES

- #01 Cotton

## CODES/STANDARDS

- Meets and exceeds:
  - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



## CWT9538CEMFG

### NEOREST® WX1 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

#### SPECIFICATIONS




| CT9538CEFG          |                                                                         |
|---------------------|-------------------------------------------------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF)                                        |
| Flush System        | TORNADO FLUSH®                                                          |
| Water Pressure      | Minimum:<br>7.25 PSI (Dynamic)<br>Maximum:<br>108.75 PSI (Static)       |
| Water Surface       | 5-5/8" x 4-1/8"                                                         |
| Trap Diameter       | 2-1/4"                                                                  |
| Trap Seal           | 2"                                                                      |
| Warranty            | Three Year Limited<br>(Residential)<br>One Year Limited<br>(Commercial) |
| Material            | Bowl Unit: Vitreous China<br>Top Unit: Plastic                          |
| Shipping Weight     | 88.4 lbs                                                                |
| Shipping Dimensions | 31-1/4" x 18-3/8" x 19-1/4"                                             |

| SN9538M                 |                                                                                                                                                                                  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Rating            | AC 120 V 60 Hz                                                                                                                                                                   |
| Power Consumption       | 1294 W                                                                                                                                                                           |
| Max Power Consumption   | 1452 W                                                                                                                                                                           |
| Power Cord Length       | 1.6 ft (0.5 m)                                                                                                                                                                   |
| Spray Volume            | Rear Cleansing:<br>0.08 – 0.11 gal/min<br>Rear Soft Cleansing:<br>0.08 – 0.11 gal/min<br>Front Cleansing:<br>0.08 – 0.11 gal/min<br>Wide Front Cleansing:<br>0.09 – 0.11 gal/min |
| Spray Features          | Adjustable Water Temp:<br>86 – 104 °F (30 – 40 °C)<br>Safety Device:<br>Temperature Fuse                                                                                         |
| Warm Air Dryer Features | Adjustable Air Temp:<br>95 – 140 °F (35 – 60 °C)<br>Airflow Volume:<br>8.83 ft³/min (0.25 m³/min)<br>Safety Device:<br>Temperature Fuse                                          |
| Heated Seat Features    | Adjustable Surface Temp:<br>82 – 97 °F (28 – 36 °C)<br>Safety Device:<br>Temperature Fuse                                                                                        |
| Ambient Temperature     | 32 – 104 °F (0 – 40 °C)                                                                                                                                                          |
| Shipping Weight         | 28.7 lbs                                                                                                                                                                         |
| Shipping Dimensions     | 31-1/4" x 20-5/8" x 9-7/8"                                                                                                                                                       |

| WT175MA             |                                  |
|---------------------|----------------------------------|
| Water Use           | 1.2 / 0.8 GPF<br>(4.5 / 3.0 LPF) |
| Flush System        | Dual Flushing                    |
| Min Water Pressure  | 8 PSI (static)                   |
| Max Water Pressure  | 108.75 PSI (static)              |
| Installation Height | 15" to 19"                       |
| Warranty            | One Year Limited                 |
| Material            | Various                          |
| Shipping Weight     | 44 lbs                           |
| Shipping Dimensions | 47-1/4" x 26-3/16" x 5-7/8"      |

#### DIMENSIONS



##### CT9538CEFG

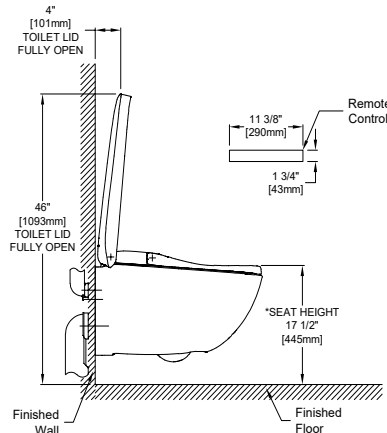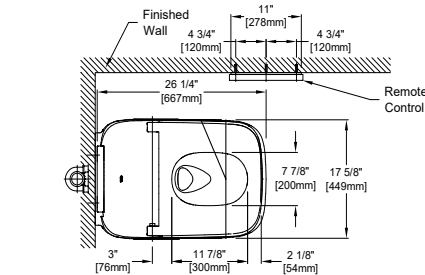

#### PRODUCT SPECIFICATION

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9538CEMFG#01.

Refer to the installation template included with the In Wall Tank for drilling the necessary holes




\* Suggested Dimension

**CWT9538CEMFG**

NEOREST® WX1

**Wall-Hung Toilet - 1.2 GPF / 0.8 GPF**

**YT990**

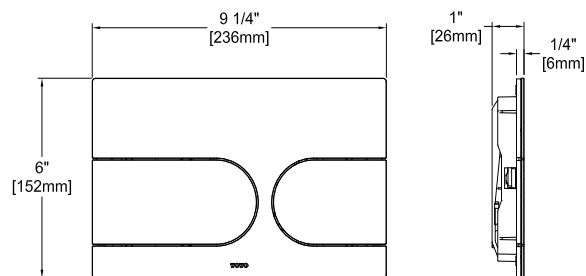

## INSTALLATION NOTES

- **WT175MA**  
Adequate structural bracing is required.  
Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.


Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

For use with potable water only. Do not use with recycled water.

It is highly recommended to use a surge protector to prevent damage in the event of a power surge. The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.

## DIMENSIONS

## WT175MA

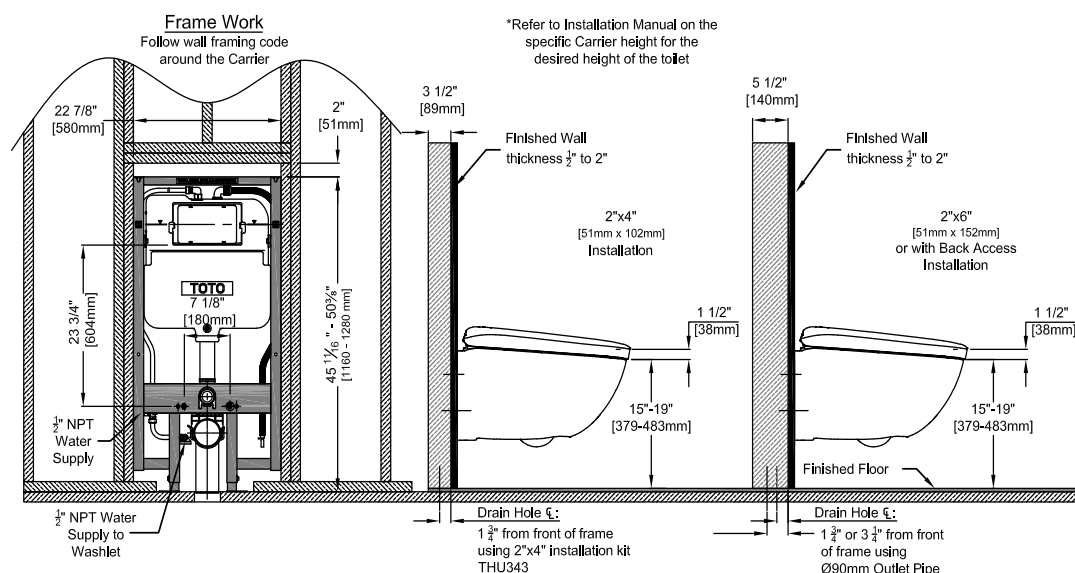

**TOTO®**

*These dimensions and specifications are subject to change without notice*

Ph: (888) 295-8134 | Fax: (800) 699-4889 | [www.totousa.com](http://www.totousa.com) | © TOTO USA

# SS-02254 v.01




# Morro Bay™

## Towel Ring

### Features



- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware

77-TR



### Codes/Standards

- Product meets or exceeds the following:
- None applicable

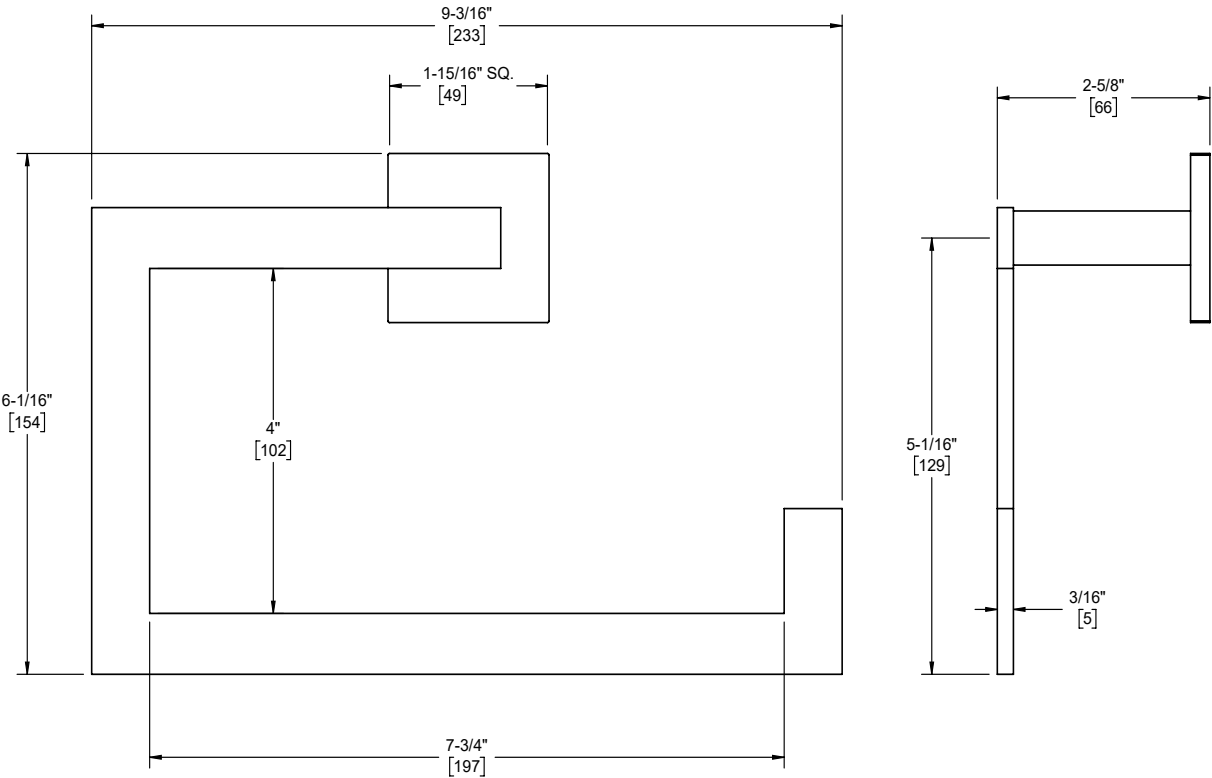

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice



# ***Morro Bay<sup>TM</sup>***

## ***Single Post Paper / Towel Holder***

### Features

**77-STP**




- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



### Codes/Standards

Product meets or exceeds the following:

- None applicable

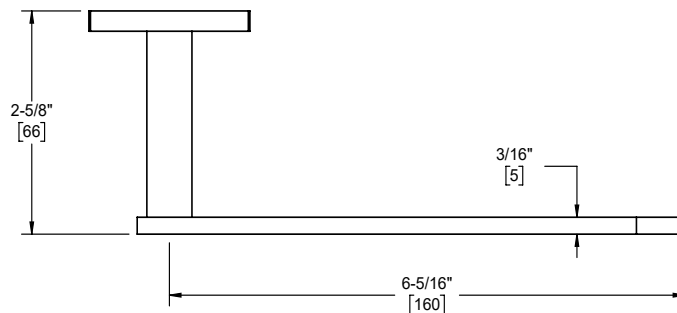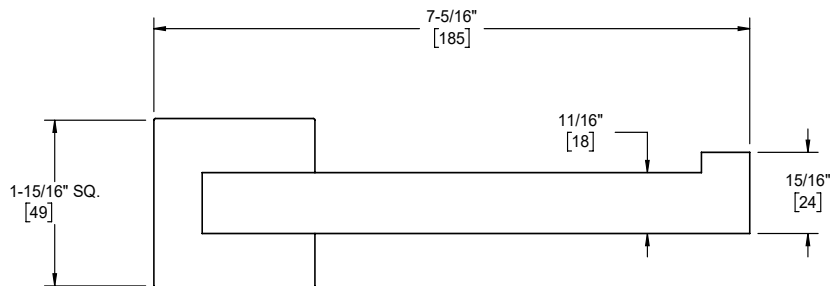

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-STP\_sp\_212707



# **Morro Bay<sup>TM</sup>**

**Robe Hook**

## Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware




**77-RH**



## Codes/Standards

Product meets or exceeds the following:

- None applicable

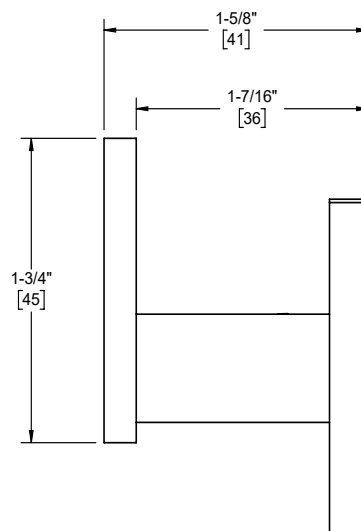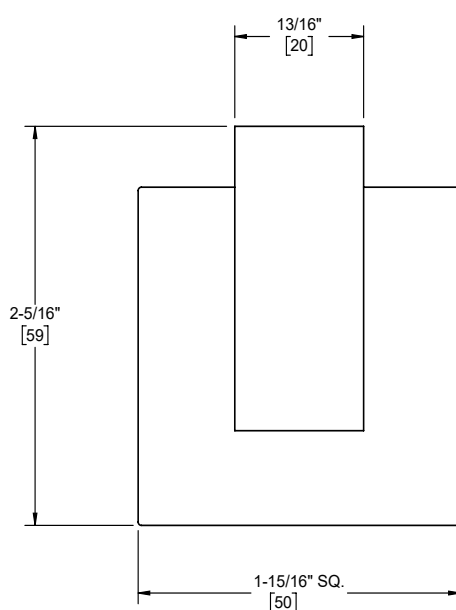

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-RH\_sp\_212707



# Rainscape™

## 14"X14" Recessed Showerhead

### Features


- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Ultra-thin faceplate mounts directly to ceiling
- Self-cleaning rubber jets
- Replace .FR with desired max flow rate:
  - SH-1414.18-ZZ for 1.8 gpm
  - SH-1414.20-ZZ for 2.0 gpm
  - SH-1414.25-ZZ for 2.5 gpm
- Includes all mounting hardware, supply hose, and template

### Codes/Standards Applicable




Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) & DOE (1.8, 2.0, & 2.5 gpm)
- Commonwealth of MA
- EPA WaterSense (1.8 & 2.0 gpm)

**SH-1414.18**  
**SH-1414.20**  
**SH-1414.25**

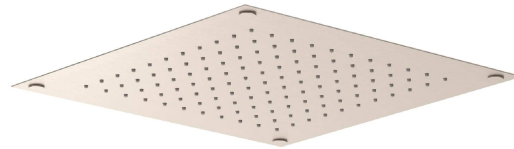

**Note:** Requires specific ceiling cut outs  
See install instructions & template

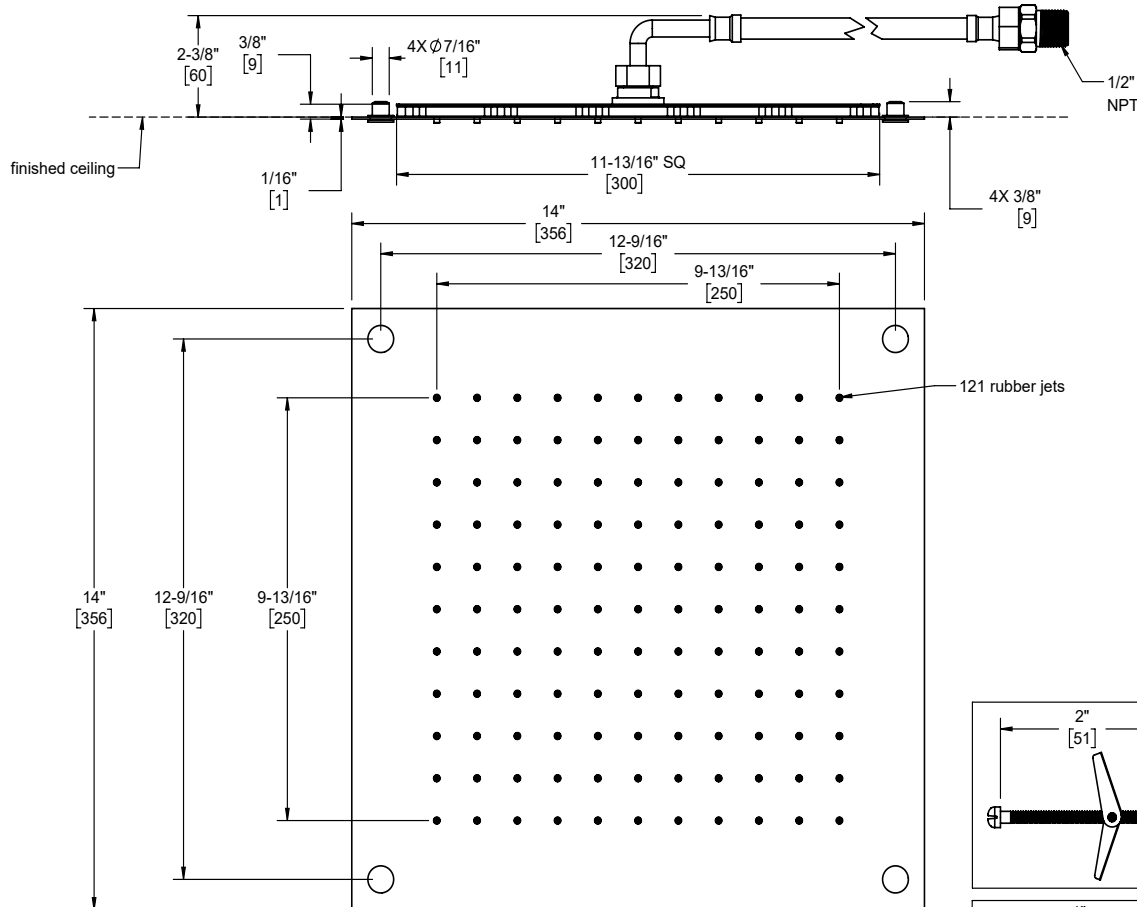

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice



# Handshower

Contemporary

## Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Self-cleaning rubber jets
- Replace .FR with desired max flow rate:  
HS-72.25 for 2.5 gpm  
HS-72.20 for 2.0 gpm  
HS-72.18 for 1.8 gpm



HS-72.25  
HS-72.20  
HS-72.18



## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (2.0 & 1.8 gpm)
- DOE (2.5, 2.0, & 1.8 gpm)
- Commonwealth of MA

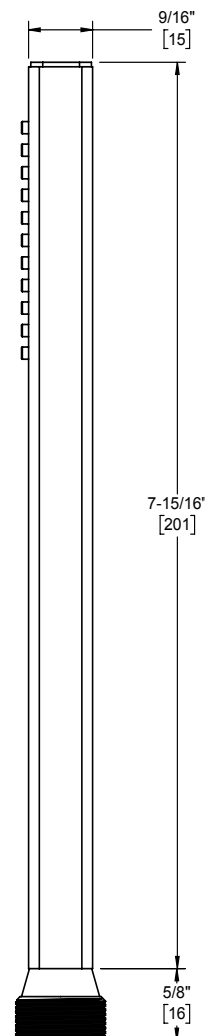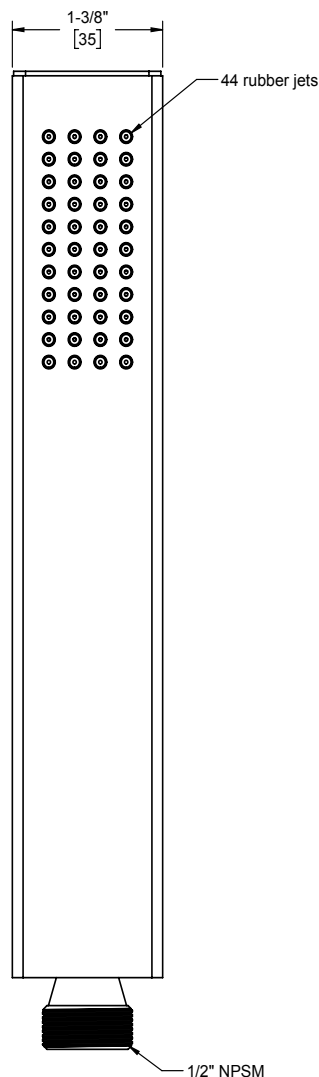

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice



# **Morro Bay**<sup>®</sup>

**StyleTherm<sup>®</sup> Trim Only**

**TO-THFN-77**



## Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- 100°F safety stop button with manual override
- Engraved brass temperature ring
- Separate volume control required

## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016
- ADA compliant

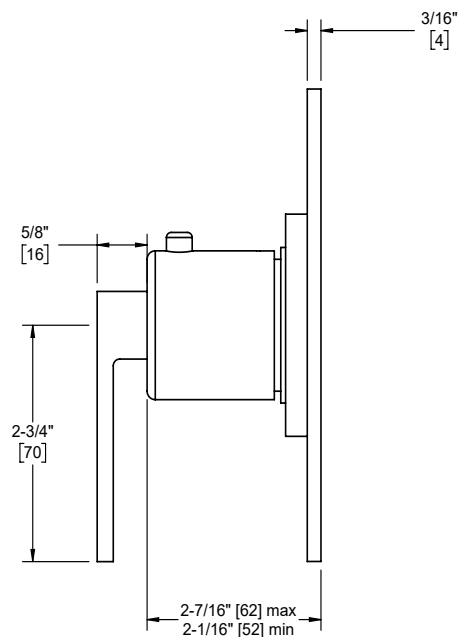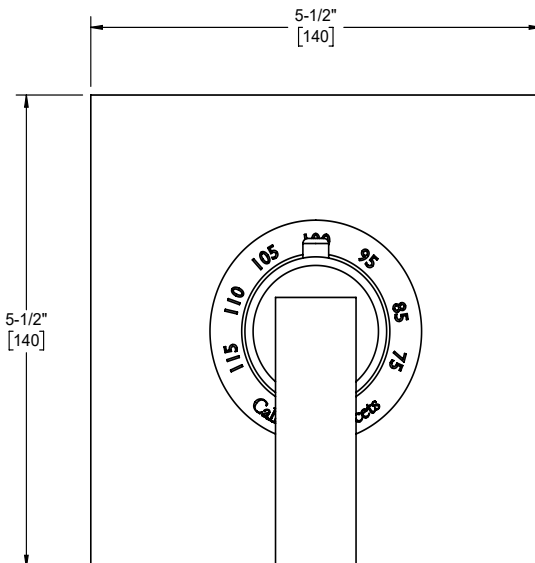

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



**California Faucets®**

**StyleTherm®**


**3/4" Thermostatic Rough Valve**

**THT75-R**

### Features

- Forged brass valve body construction
- Max flow rate: 11.0 gpm (41.6 L/m) @ 60 psi
- Integral service stops with check valves
- Single-handle temperature mixing
- Thermostatic anti-scald protection
- Genuine Vernet® mixing cartridge featuring
  - Polymer construction limits limescale build-up
  - Integrated filter screens
  - Paraffin wax element

**NOTE:** Requires separate shut-off/volume control valve(s)



### Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.18.1-2005/CSA B125.1-05
- ASSE 1016

mudguard not shown



side view  
front view

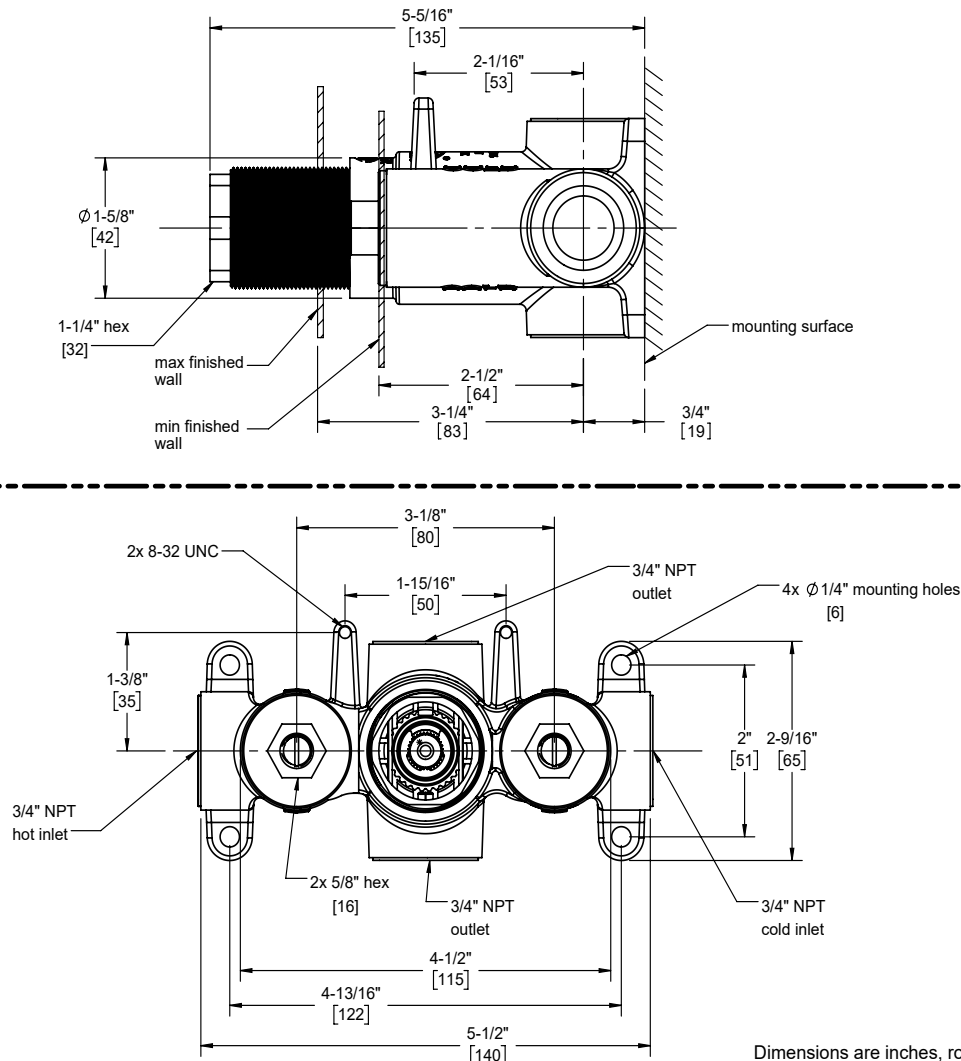

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



# ***Morro Bay™***

**WALL OR DECK HANDLE TRIM ONLY**




**TO-77-W**

## **Features**

- Base dimension 2-1/4" x 2-1/4"
- Use for wall stop, wall diverter or deck diverter
- Solid brass construction
- Rough valve sold separately (50-W-R, 75-W-R, WDV-R, DDV-R)
- Over 30 finishes including 15 PVD finishes

## **Codes/Standards Applicable**

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1

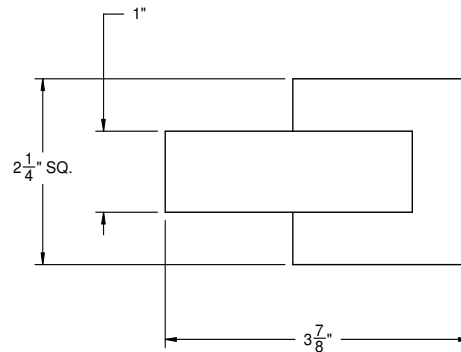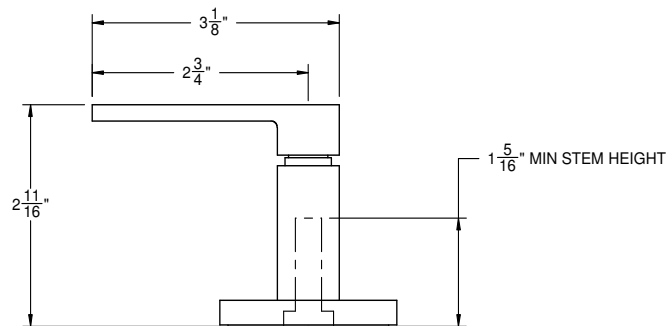

ALL DIMENSIONS SHOWN TO NEAREST 1/16"

**California Faucets®**  
800.822.8855 californi faucets.com

## 50-W-R or 75-W-R WATER FLOW

How to determine proper installation, water flow direction, of installed in-wall shut-off/volume control valve(s).

**WARNING:** Prior to removing ceramic disc cartridge from valve body all water supplies to the valve(s) must be turned off. There can be NO water flow to the valve(s).

**Photo 1** – shows arrow on side of valve to indicate proper water flow direction.


This shows how water MUST be plumbed to valve body inlet and outlet ports. If this water flow direction is NOT followed the valve MUST be reinstalled.



**Photo 2** – shows the cartridge cavity for incoming and outgoing waterways.

Two (2) arrows show where water ENTERS cavity

One (1) arrow shows water EXITS cavity

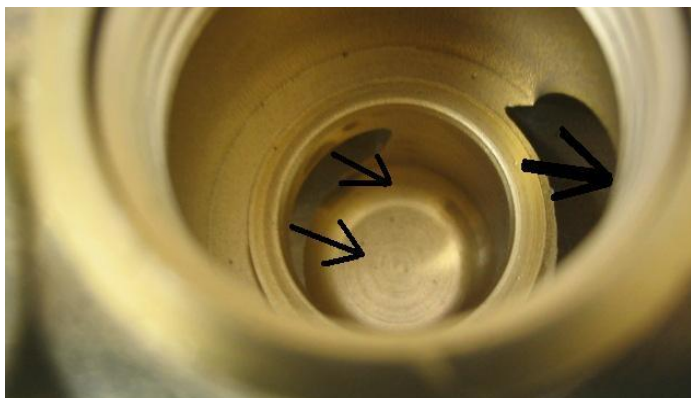


**Photo 3** – shows top view of valve body indicating water flow direction as related to body's ports and passage ways.

Inlet port is on left side of valve (as pictured) and connected to incoming water supply (e.g. therm valve)

Water enters at bottom portion of valve (1) cavity

Water exits at upper portion of valve (2) cavity


Outlet port is on right side of valve (as pictured) is connected to output device (e.g. showerhead)

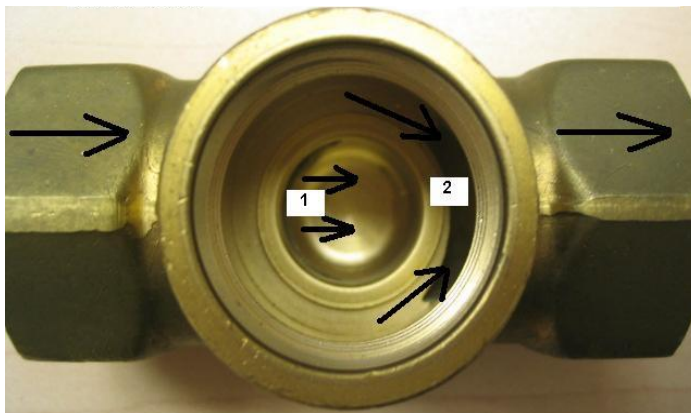

If the water flow is not correctly followed as described above, numerous problems can and will occur. The cartridge disc's will fail which may cause flooding and damage to residence. The possibility of failure increase the longer the valve is installed. Initial operation may function as intended, but as valve experiences numerous on/off cycles the water pressure will cause ceramic discs to separate, disengage from cartridge stem and/or crack. This failure is due to improper installation and IS NOT covered under warranty. It is the responsibility of the installer to properly install and verify all functions of valve(s) at the time of installation.

50-W-R\_ts\_131212

# ID Infinity Drain




## S-TIF 65 Site Sizable Series

- **S-TIF 6536 - 36" Complete Kit**
- **S-TIF 6548 - 48" Complete Kit**
- **S-TIF 6560 - 60" Complete Kit**
- **S-TIF 6572 - 72" Complete Kit**
- **S-TIF 6596 - 96" Complete Kit**

### Features

- 12 gauge, 304L stainless steel Tile Insert Frame
- Modify length and outlet location on site
- Indoor or outdoor use
- PVC Channel
- Works with 2" clamp down floor with 2" throat/strainer size *(not included)*
- **NOT INTENDED** for installation across a barrier-free threshold
- Compatible with: PVC Liner, Rubber Liner (Chloraloy®), Hot Mop, Lead Pan, Copper Pan, or Fiberglass
- Flow rate - 9 gpm per outlet
  - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
  - Additional outlets can be added and combined into a larger waste

### Installation

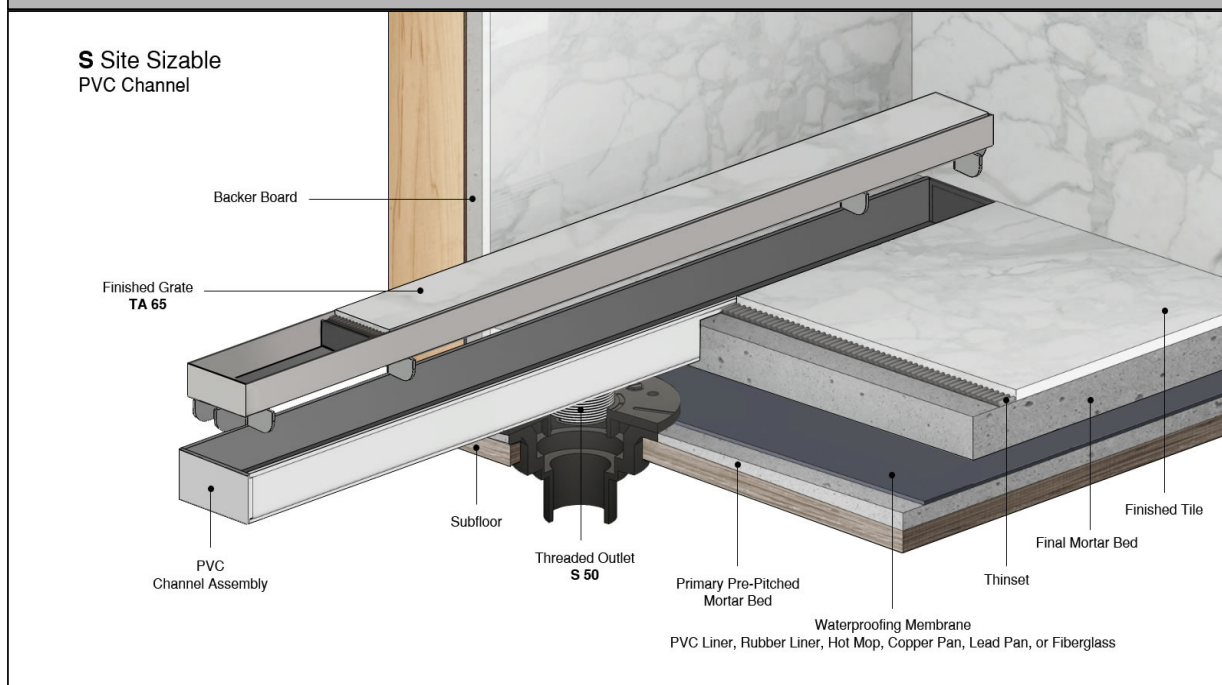

### Care & Maintenance

S-TIF 65 stainless steel linear drain top grates are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite Cleaner may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.infinitydrain.com




NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

# ID Infinity Drain

## S-TIF 6536


## S-TIF 6548

## S-TIF 6560

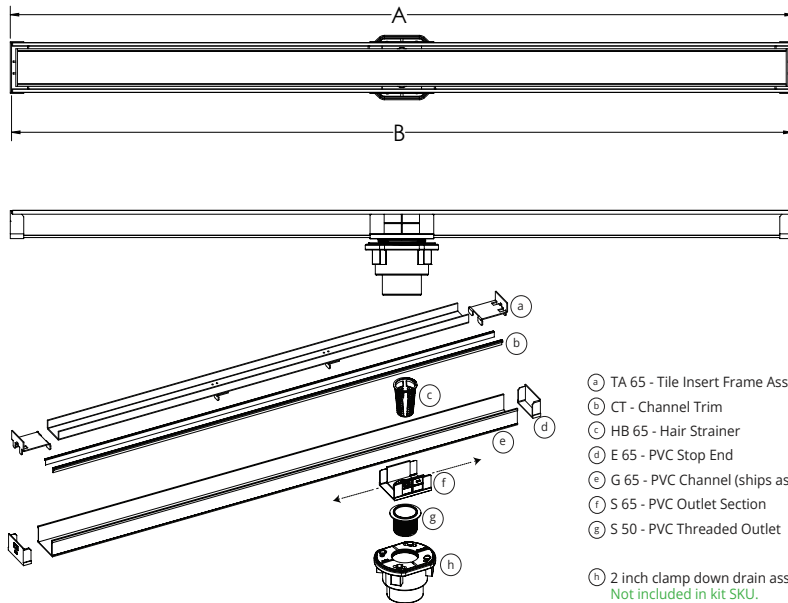

- Ⓐ TA 65 - Tile Insert Frame Assembly
- Ⓑ CT - Channel Trim
- Ⓒ HB 65 - Hair Strainer
- Ⓓ E 65 - PVC Stop End
- Ⓔ G 65 - PVC Channel (ships as one piece)
- Ⓕ S 65 - PVC Outlet Section
- Ⓖ S 50 - PVC Threaded Outlet

Ⓗ 2 inch clamp down drain assembly  
Not included in kit SKU.  
(Material can be Cast Iron, ABS, or PVC)

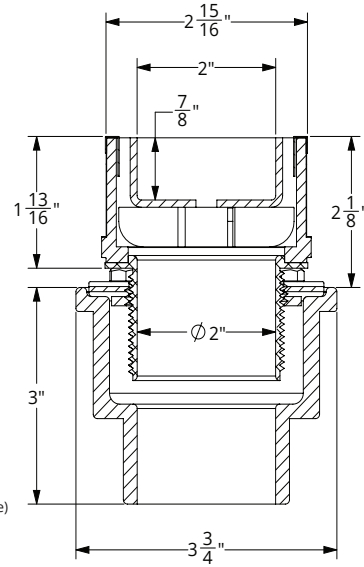

## SECTION A-A

| Model Number | Complete Kit Contents                                                                                                                                                                                                                                                       | A<br>(Maximum Overall Length) | B<br>(Maximum Grate Length) |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------|
| S-TIF 6536   | 1 - TA 6536 Tile Insert Frame<br>1 - G 6536 PVC Channel<br>1 - CS 6536 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key                            | 36"                           | 35 7/8"                     |
| S-TIF 6548   | 1 - TA 6548 Tile Insert Frame<br>1 - G 6548 PVC Channel<br>1 - CS 6548 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key<br>2 - CT 48 Channel Trims | 48"                           | 47 7/8"                     |
| S-TIF 6560   | 1 - TA 6560 Tile Insert Frame<br>1 - G 6560 PVC Channel<br>1 - CS 6560 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key<br>2 - CT 60 Channel Trims | 60"                           | 59 7/8"                     |

### Finishes

- ☐ Satin Stainless (SS) ☐ Polished Stainless (PS) ☐ Oil Rubbed Bronze (ORB) ☐ Satin Bronze (SB) ☐ Matte Black (BK)
- ☐ Satin Champagne (SC) ☐ Polished Gold (PG) ☐ Polished Brass (PB) ☐ Gunmetal (GM) ☐ Matte White (MW)

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.Infinitydrain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FM017-12-24



Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superceded or void data.

Page 2 of 3

# ID Infinity Drain

## S-TIF 6572

## S-TIF 6596

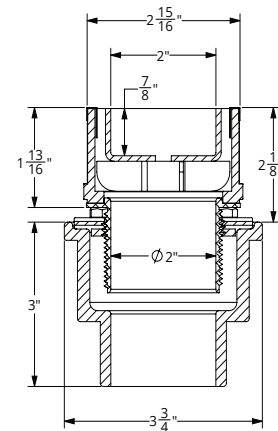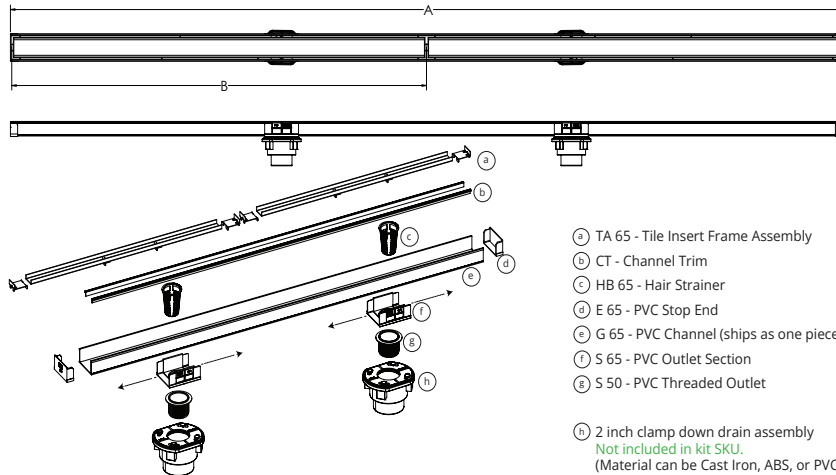

### SECTION A-A

| Model Number | Complete Kit Contents                                                                                                                                                                                                                                  | A<br>(Maximum Overall Length) | B<br>(Maximum Grate Length) |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------|
| S-TIF 6572   | 2 - TA 6536 Tile Insert Frames<br>1 - G 6536 PVC Channel<br>1 - CS 6536 Channel Spacer<br>2 - E 65 PVC Stop Ends<br>2 - S 65 PVC Outlet Sections<br>2 - S 50 PVC Threaded Outlets<br>1 - HMK-65-2A:<br>2 - HB 65 Hair Baskets<br>1 - AKEY Lift Out Key | 72"                           | 35 7/8"<br>(x 2)            |
| S-TIF 6596   | 2 - TA 6548 Tile Insert Frames<br>1 - G 6596 PVC Channel<br>2 - CS 6580 Channel Spacer<br>2 - E 65 PVC Stop Ends<br>2 - S 65 PVC Outlet Sections<br>2 - S 50 PVC Threaded Outlets<br>1 - HMK-65-2A:<br>2 - HB 65 Hair Baskets<br>1 - AKEY Lift Out Key | 96"                           | 47 7/8"<br>(x 2)            |

### Optional Components

|        |                                                                          |
|--------|--------------------------------------------------------------------------|
| F 65   | PVC Non-Threaded Outlet                                                  |
| GJC 65 | PVC Straight Joiner Strip                                                |
| GAM 65 | PVC 90° Angle Joiner                                                     |
| TNRN-P | PVC Threaded Extension Nipple                                            |
| UCP 2  | Universal 2" Clamping Plate                                              |
| UCP 4  | Universal 4" Clamping Plate                                              |
| UCP 42 | Universal Reducing Plate<br>(Adapts 4" or 3" existing throat size to 2") |

### Available components for longer lengths

|         |                       |       |                     |
|---------|-----------------------|-------|---------------------|
| TA 6536 | 36" Tile Insert Frame | E 65  | PVC Stop End        |
| TA 6548 | 48" Tile Insert Frame | S 50  | PVC Threaded Nipple |
| TA 6560 | 60" Tile Insert Frame | CT 36 | 36" Channel Trim    |
| G 6536  | 36" PVC Channel       | CT 48 | 48" Channel Trim    |
| G 6548  | 48" PVC Channel       | CT 60 | 60" Channel Trim    |
| G 6560  | 60" PVC Channel       | CT 96 | 96" Channel Trim    |
| G 6596  | 96" PVC Channel       |       |                     |
| G 6580  | 80" PVC Channel       |       |                     |
| G 65108 | 108" PVC Channel      |       |                     |

NOTE: For indoor applications and outdoor applications where exposure to users without footwear is possible Channel trim (CT) is not recommended on drains over 96" or drains with configurations that include turns. The installation of channel trim on site sizeable linear drains that fall within the outlined conditions listed are at the judgement of the installer, independent of Infinity Drain, LTD.

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.Infinitydrain.com  
FM017-12-24



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superceded or void data.

Page 3 of 3

| VENDOR PART    | VENDOR             | DESCRIPTION                                                           | PAGE |
|----------------|--------------------|-----------------------------------------------------------------------|------|
| 7702-SN        | California Faucets | Morro Bay 8" Widespread Lavatory Faucet - Satin Nickel                | 74   |
| SN7631M#01     | Toto               | Eco Soire Washlet G5A Integrated Toilet Top Unit - Cotton White       | 75   |
| CT7631CEMFG#01 | Toto               | Eco Soire Washlet G5A Integrated Toilet Bowl Unit - Cotton White      | 77   |
| 77-TR-SN       | California Faucets | Morro Bay Towel Ring - Satin Nickel                                   | 79   |
| 77-STP-SN      | California Faucets | Morro Bay Single Post Toilet Paper / Hand Towel Holder - Satin Nickel | 80   |
| 77-RH-SN       | California Faucets | Morro Bay Robe Hook - Satin Nickel                                    | 81   |
| SH-1414.18-SN  | California Faucets | Rainscape Rainscape 14" X 14" Recessed Showerhead - Satin Nickel      | 82   |
| 9126-78-SN     | California Faucets | Terra Mar Wall Mounted Handshower Kit, Rectangle Base - Satin Nickel  | N/A  |
| HS-72.18-SN    | California Faucets | Contemporary Handshower - Satin Nickel                                | 83   |
| TO-THFN-77-SN  | California Faucets | Morro Bay StyleTherm 3/4" Thermostatic Trim Only - Satin Nickel       | 84   |

|                   |                           |                                                                                          |           |
|-------------------|---------------------------|------------------------------------------------------------------------------------------|-----------|
| <b>TH75-R</b>     | <b>California Faucets</b> | <b>StyleTherm 3/4" Rough Valve</b>                                                       | <b>85</b> |
| <hr/>             |                           |                                                                                          |           |
| <b>TO-77-W-SN</b> | <b>California Faucets</b> | <b>Morro Bay Wall or Deck Handle Trim Only - Satin Nickel</b>                            | <b>86</b> |
| <hr/>             |                           |                                                                                          |           |
| <b>75-W-R</b>     | <b>California Faucets</b> | <b>3/4" Wall Stop Valve Only</b>                                                         | <b>87</b> |
| <hr/>             |                           |                                                                                          |           |
| <b>STIF6536SS</b> | <b>Infinity Drain</b>     | <b>Site Sizable Series 36" Pvc Complete Kit With Tile Insert Frame - Satin Stainless</b> | <b>88</b> |
| <hr/>             |                           |                                                                                          |           |



**California Faucets®**

**Morro Bay™**

**WIDESPREAD LAVATORY FAUCET**

**7702**


**Features**

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 5-1/2" [140] spout center to center
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- Ø 1-1/4" all brass touch style pop up drain assembly
- 1.2 gpm (4.5 L/m) max flow rate




**Codes/Standards Applicable**

Meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA
- ADA compliant

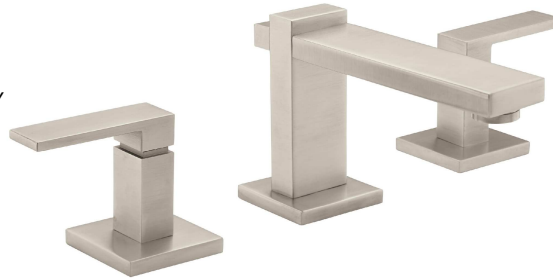

7702 shown

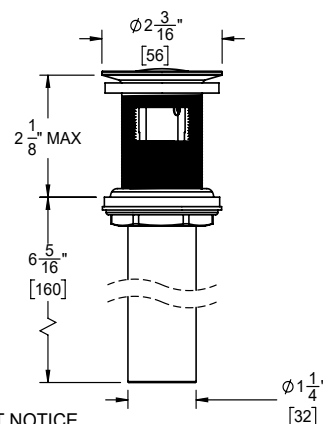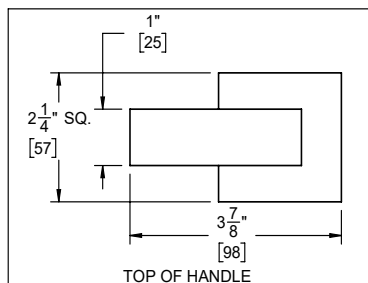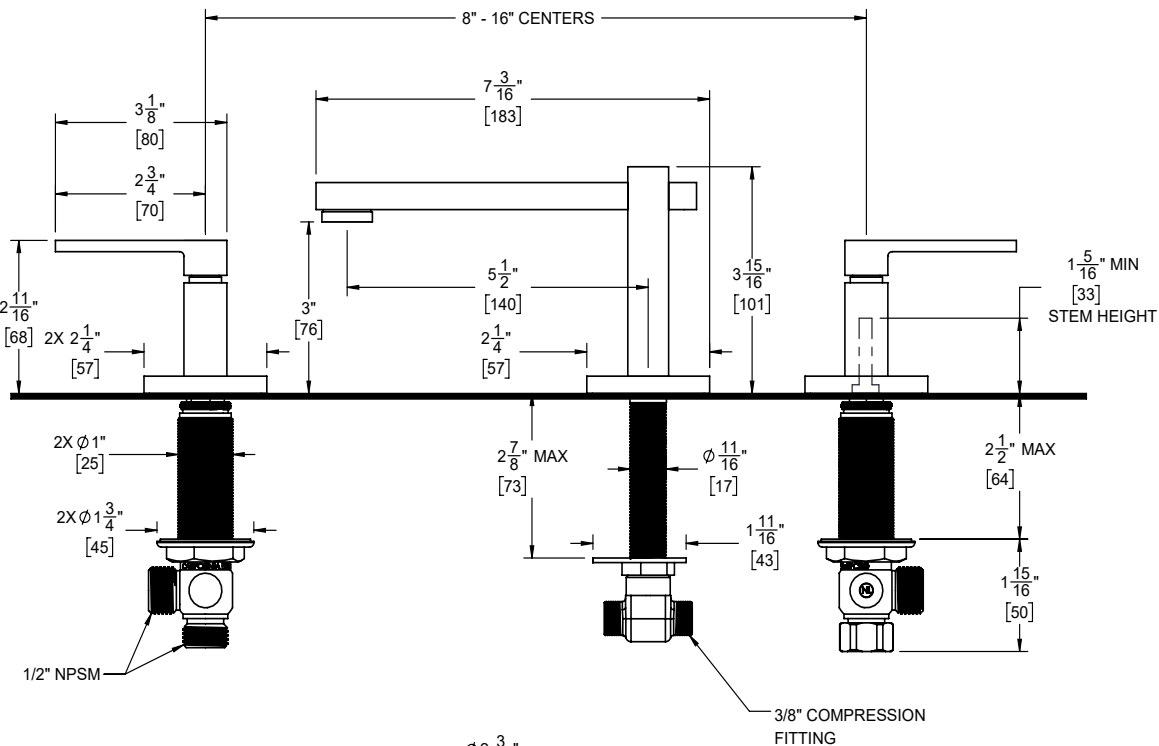

| THROUGH-HOLE SPECIFICATIONS |               |               |
|-----------------------------|---------------|---------------|
| MIN                         | RECOMMENDED   | MAX           |
| SPOUT: Ø 1-1/8" [29]        | Ø 1-3/8" [35] | Ø 1-1/2" [38] |
| VALVE: Ø 1" [25]            | Ø 1-3/8" [35] | Ø 1-1/2" [38] |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS SHOWN TO NEAREST 1/16"  
[DIMENSIONS SHOWN TO NEAREST 1mm]

**TOTO®**

**MS7631CEMFG**

## WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF

### FEATURES

- High-efficiency dual flush functionality 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF)
- TORNADO FLUSH® system utilizes 360° cleaning power to reach every part of the hole-free rim design bowl
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction remote control with 4-users personalized memory settings
- Universal Height, ADA compliant
- Night light

### COMPONENTS

- SN7631M - Top Unit
- CT7631CEMFG - Elongated Bowl Unit

### COLORS/FINISHES

- #01 Cotton

### PRODUCT SPECIFICATION

The WASHLET G5A with the TORNADO FLUSH system toilet shall be 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF). Toilet shall have CEFIONTECT ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS7631CEMFG#01.



**TORNADO FLUSH**



**CEFIONTECT**



**WASHLET**



**PREMIST**

### CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others
- ADA Compliant
- Complies with CA Prop 65 warning requirements



**CALGreen**

## MS7631CEMFG

### WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF


#### SPECIFICATIONS

|                              |                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Water Use</b>             | 1.2 GPF / 1.0 GPF<br>(4.5 LPF / 3.8 LPF)                                                            |
| <b>Flush System</b>          | TORNADO FLUSH®                                                                                      |
| <b>Water Pressure</b>        | Min: 7.25 PSI (0.05MPa) Flowing<br>Max: 108.75 PSI (0.75MPa) Static                                 |
| <b>Water Surface</b>         | 8-5/8" x 7-1/4"                                                                                     |
| <b>Trap Diameter</b>         | 2" (51 mm)                                                                                          |
| <b>Trap Seal</b>             | 2-1/8" (54 mm)                                                                                      |
| <b>Rough-in</b>              | 12"                                                                                                 |
| <b>Warranty</b>              | One Year Limited (Residential)<br>One Year Limited (Commercial)                                     |
| <b>Material</b>              | Bowl: Vitreous China<br>Seat + Cover: Plastic                                                       |
| <b>Shipping Weight</b>       | SN7631M: 19 lbs<br>CT7631CEMFG: 94 lbs                                                              |
| <b>Shipping Dimensions</b>   | SN7631M:<br>31-3/16" L x 17-1/2" W x 10-3/4" H<br>CT7631CEMFG:<br>31-5/8" L x 15-3/4" W x 22-5/8" H |
| <b>Power Rating</b>          | AC 120 V, 60 Hz, 1276 W                                                                             |
| <b>Power Cord Length</b>     | 3.9ft                                                                                               |
| <b>Water Pressure</b>        | Min: 7.25 PSI (0.05MPa) Flowing<br>Max: 108.75 PSI (0.75MPa) Static                                 |
| <b>Drying Feature</b>        | Air Temperature:<br>Approx. 95°F - 140°F (35°C - 60°C)                                              |
| <b>Rear Washing</b>          | Approx. 0.07 - 0.11 gal/min                                                                         |
| <b>Rear Soft Washing</b>     | Approx. 0.07 - 0.11 gal/min                                                                         |
| <b>Front Washing</b>         | Approx. 0.08 - 0.11 gal/min                                                                         |
| <b>Washing Spray Feature</b> | Approx. 95°F - 104°F (35°C - 40°C)                                                                  |
| <b>Safety Feature</b>        | Temperature Fuse                                                                                    |
| <b>Drying Feature</b>        | Air Temperature: Approx. 95°F - 140°F<br>(35°C - 60°C)                                              |
| <b>Airflow Volume</b>        | 8.83 ft3/min                                                                                        |
| <b>Dryer Safety Feature</b>  | Temperature Fuse                                                                                    |
| <b>Seat Warming Feature</b>  | Surface Temperature: Approx. 82°F -<br>97°F (28°C - 36°C)                                           |
| <b>Seat Heater Capacity</b>  | 50 W                                                                                                |
| <b>Air Volume</b>            | Normal mode: Approx. 3.17 ft3/min <br>Power mode: Approx. 5.65 ft3/min                              |
| <b>Air Purifying Feature</b> | O <sub>2</sub> Deodorizer                                                                           |
| <b>Ambient Temp.</b>         | 32°F - 104°F (0°C - 40°C)                                                                           |
| <b>Size</b>                  | 28-7/16" L x 15-1/4" W x 22-3/8" H                                                                  |
| <b>Weight</b>                | 99lbs                                                                                               |

#### INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.
- The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.
- Consult local electric code for GFCI location and installation requirements.

#### DIMENSIONS

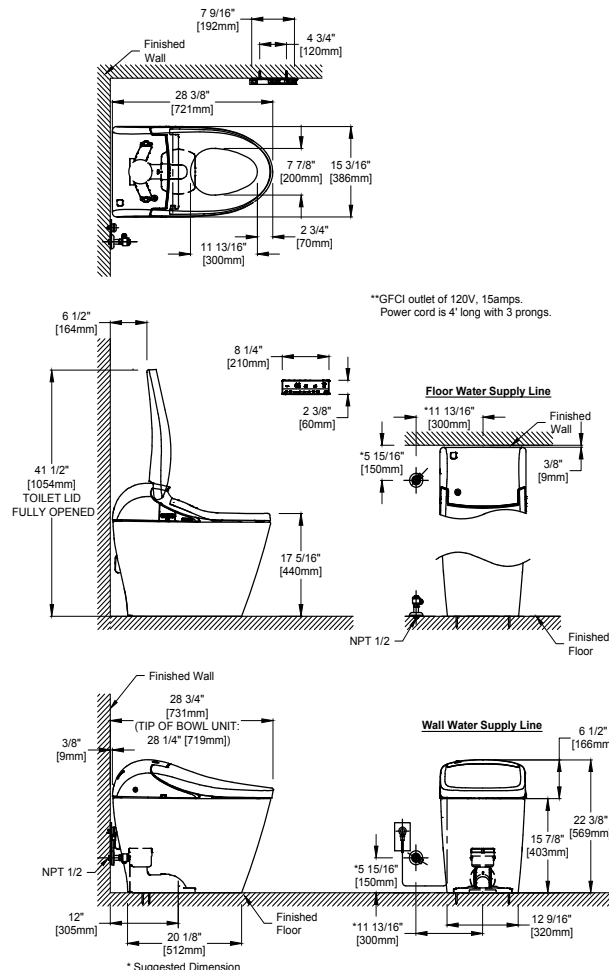

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02260 v.03

**TOTO®**

**MS7631CEMFG**

## WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF

### FEATURES

- Compact, modern one-piece skirted Smart Bidet Toilet with integrated personal cleansing and comfort features, with decorative silver trim
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- High-efficiency TORNADO FLUSH® system - 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF)
- Auto flush - with back-up manual flush for power outages
- Universal Height, ADA compliant
- Touchless auto open/close lid
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Gentle aerated, warm water, front and rear spray with oscillating and pulsating features
- Adjustable spray position, water temperature, and water pressure
- Instantaneous water heater for continuous warm water and energy savings
- Warm air dryer with three variable temperature settings
- Automatic air deodorizer
- Multifunction remote control with personalized memory settings for up to 4 users
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- CLEAN LIFT allows easy cleaning between the top and bowl unit
- Night light illuminates the inside of the bowl
- Automatic and programmable energy saving systems

### COMPONENTS

- SN7631M - Top Unit
- CT7631CEMFG - Elongated Bowl Unit

### COLOR/FINISHES

- #01 Cotton



Accent Trim Color



**WASHLET**



**PREMIST**



**TORNADO FLUSH**



**AUTO FLUSH**



**EWATER**



**UNIVERSAL HEIGHT**



**CEFIONTECT**



**SKIRTED DESIGN**

### PRODUCT SPECIFICATION

The WASHLET G5A with the TORNADO FLUSH system toilet shall be 1.2 GPF / 1.0 GPF (4.5 LPF / 3.8 LPF). Toilet shall have CEFIONTECT ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS7631CEMFG#01.

### CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/ CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others
- ADA Compliant
- Complies with CA Prop 65 warning requirements



**CALGreen**

## MS7631CEMFG

### WASHLET® G5A Integrated Smart Toilet - 1.2 GPF / 1.0 GPF


#### SPECIFICATIONS

|                                  |                                                                                                     |
|----------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Water Use</b>                 | 1.2 GPF / 1.0 GPF<br>(4.5 LPF / 3.8 LPF)                                                            |
| <b>Flush System</b>              | TORNADO FLUSH®                                                                                      |
| <b>Water Pressure</b>            | Min: 7.25 PSI (0.05MPa) Flowing<br>Max: 108.75 PSI (0.75MPa) Static                                 |
| <b>Water Surface</b>             | 8-5/8" x 7-1/4"                                                                                     |
| <b>Trap Diameter</b>             | 2" (51 mm)                                                                                          |
| <b>Rough-in</b>                  | 12"                                                                                                 |
| <b>Trap Seal</b>                 | 2-1/8" (54 mm)                                                                                      |
| <b>Warranty</b>                  | One Year Limited (Residential)<br>One Year Limited (Commercial)                                     |
| <b>Material</b>                  | Bowl: Vitreous China<br>Seat + Cover: Plastic                                                       |
| <b>Power Rating</b>              | AC 120 V, 60 Hz, 1276 W                                                                             |
| <b>Power Cord Length</b>         | 3.9ft (1.2m)                                                                                        |
| <b>Rear Washing</b>              | Approx. 0.07- 0.11 gal/min                                                                          |
| <b>Rear Soft Washing</b>         | Approx. 0.07- 0.11 gal/min                                                                          |
| <b>Front Washing</b>             | Approx. 0.08 - 0.11 gal/min                                                                         |
| <b>Washing Spray Temperature</b> | 95°F - 104°F (35°C - 40°C)                                                                          |
| <b>Safety Feature</b>            | Temperature Fuse                                                                                    |
| <b>Drying Feature</b>            | Air Temperature:<br>Approx. 95°F - 140°F (35°C - 60°C)                                              |
| <b>Airflow Volume</b>            | 8.83 ft3/min                                                                                        |
| <b>Dryer Safety Feature</b>      | Temperature Fuse                                                                                    |
| <b>Seat Warming Feature</b>      | Surface Temperature:<br>Approx. 82°F - 97°F (28°C - 36°C)                                           |
| <b>Seat Heater Capacity</b>      | 50 W                                                                                                |
| <b>Seat Safety Feature</b>       | Temperature Fuse                                                                                    |
| <b>Air Purifying Feature</b>     | O2 Deodorizer                                                                                       |
| <b>Ambient Temperature Range</b> | 32°F - 104°F (0°C - 40°C)                                                                           |
| <b>Shipping Weight</b>           | SN7631M: 19 lbs<br>CT7631CEMFG: 94 lbs                                                              |
| <b>Shipping Dimensions</b>       | SN7631M:<br>31-3/16" L x 17-1/2" W x 10-3/4" H<br>CT7631CEMFG:<br>31-5/8" L x 15-3/4" W x 22-5/8" H |

#### INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.
- The following factors may affect IR signal strength and top unit operation: product and remote control location, room size, shape, construction materials, and degree of darkness (color) of ceiling and walls.
- Consult local electric code for GFCI location and installation requirements.

#### DIMENSIONS

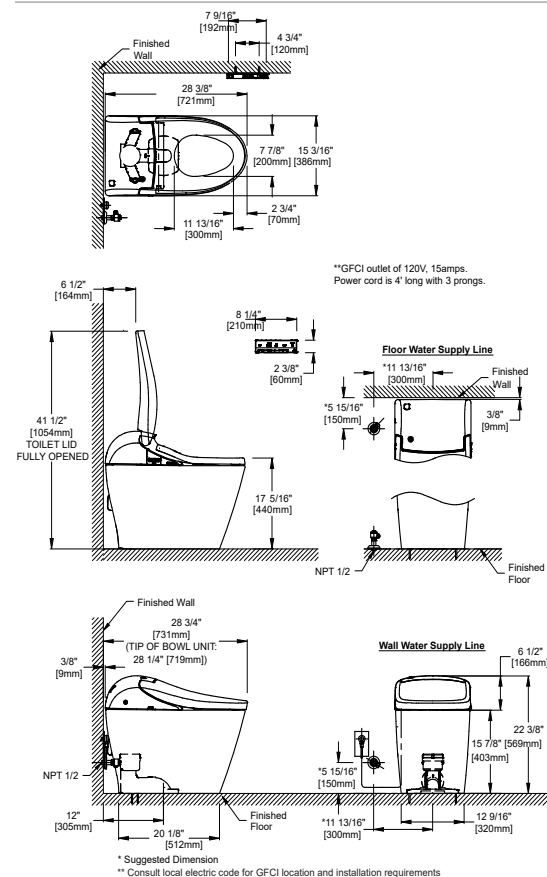

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-02260 v.06




# **Morro Bay<sup>TM</sup>** **Towel Ring**

**77-TR**

## Features



- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



## Codes/Standards

Product meets or exceeds the following:

- None applicable

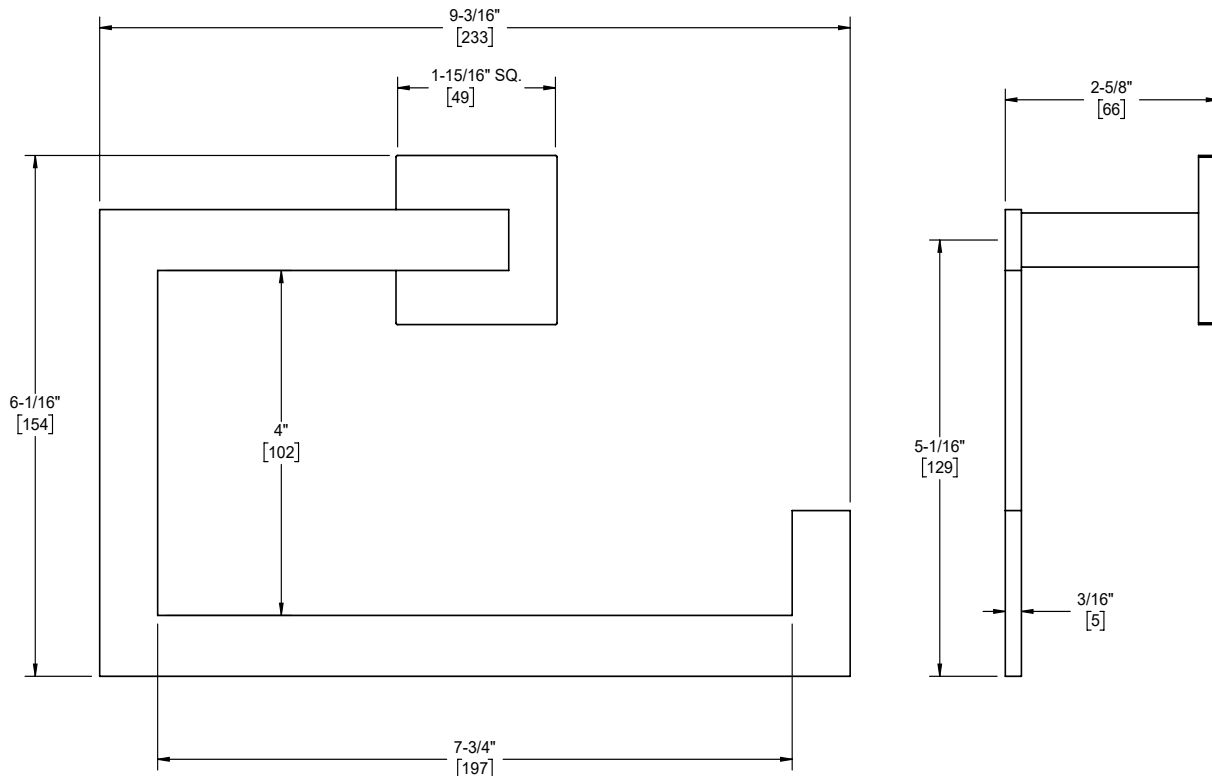

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-TR\_sp\_212707



# ***Morro Bay™***

## ***Single Post Paper / Towel Holder***

### Features

**77-STP**




- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



### Codes/Standards

Product meets or exceeds the following:

- None applicable

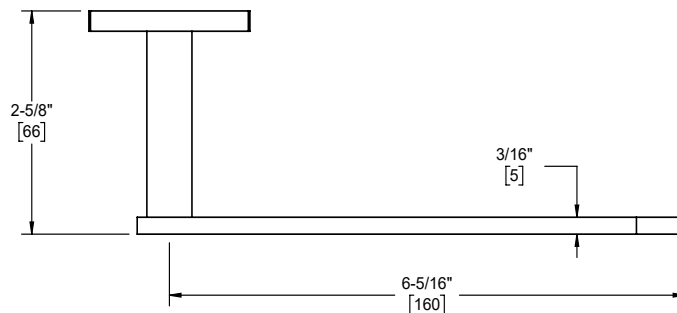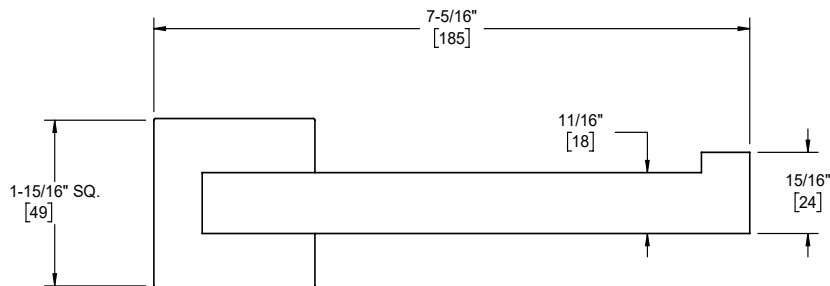

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-STP\_sp\_212707



# **Morro Bay<sup>TM</sup>**

**Robe Hook**

## Features

**77-RH**




- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Includes all mounting hardware



## Codes/Standards

Product meets or exceeds the following:

- None applicable

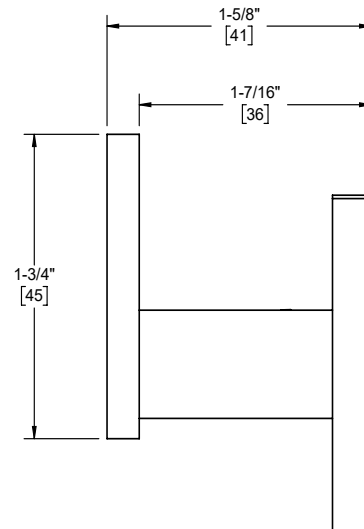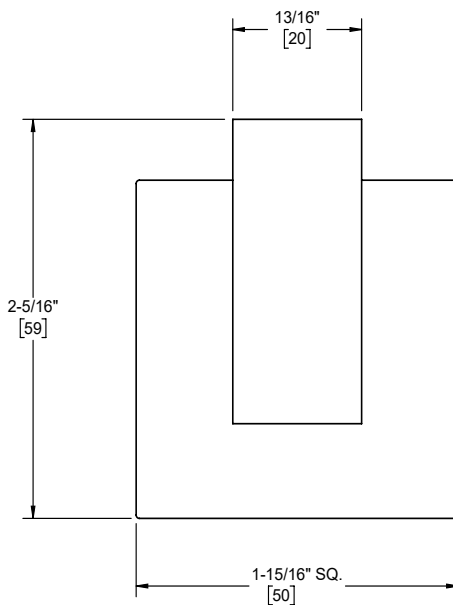

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

77-RH\_sp\_212707



**California Faucets®**

**Rainscape™**

### ***14"X14" Recessed Showerhead***


## Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Ultra-thin faceplate mounts directly to ceiling
- Self-cleaning rubber jets
- Replace .FR with desired max flow rate:
  - SH-1414.18-ZZ for 1.8 gpm
  - SH-1414.20-ZZ for 2.0 gpm
  - SH-1414.25-ZZ for 2.5 gpm
- Includes all mounting hardware, supply hose, and template

SH-1414.18

SH-1414.20

SH-1414.25

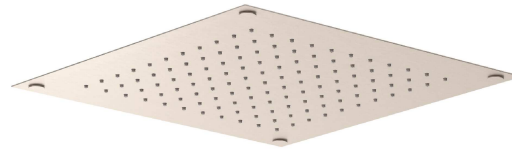




### Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) & DOE (1.8, 2.0, & 2.5 gpm)
- Commonwealth of MA
- EPA WaterSense (1.8 & 2.0 gpm)



**Note:** Requires specific ceiling cut outs  
See install instructions & template

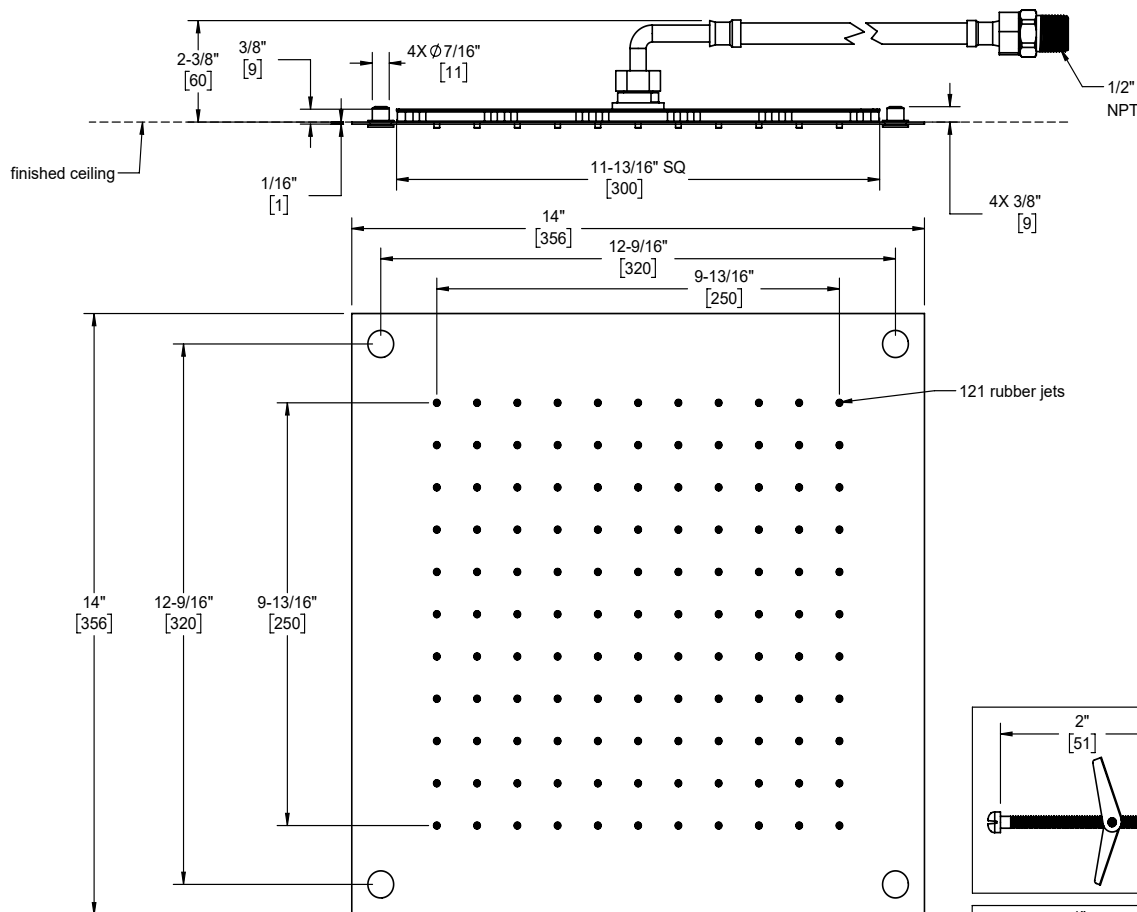

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

[www.californiafaucets.com](http://www.californiafaucets.com)

Page 1

*SH-1414.FR sp 240701*



**California Faucets®**

# Handshower

**Contemporary**

## Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Self-cleaning rubber jets
- Replace .FR with desired max flow rate:  
HS-72.25 for 2.5 gpm  
HS-72.20 for 2.0 gpm  
HS-72.18 for 1.8 gpm



**HS-72.25**  
**HS-72.20**  
**HS-72.18**



## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (2.0 & 1.8 gpm)
- DOE (2.5, 2.0, & 1.8 gpm)
- Commonwealth of MA

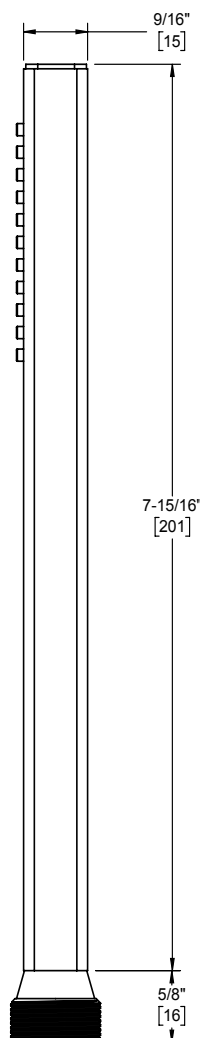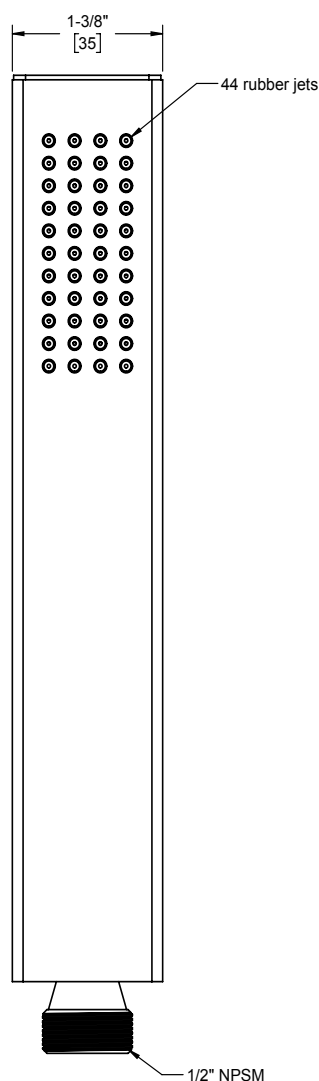

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



# **Morro Bay**<sup>®</sup>

**StyleTherm<sup>®</sup> Trim Only**

**TO-THFN-77**



## Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- 100°F safety stop button with manual override
- Engraved brass temperature ring
- Separate volume control required

## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016
- ADA compliant

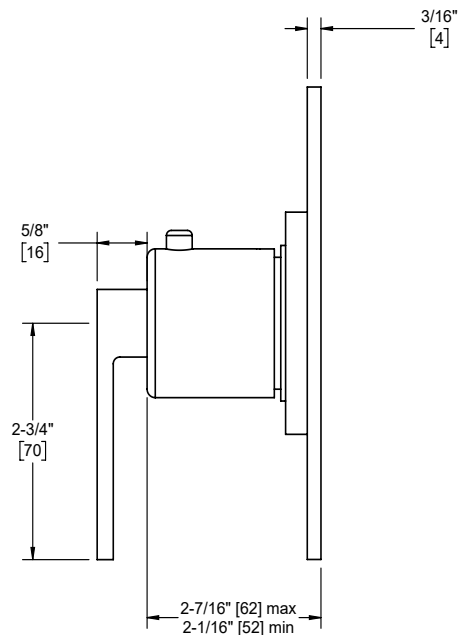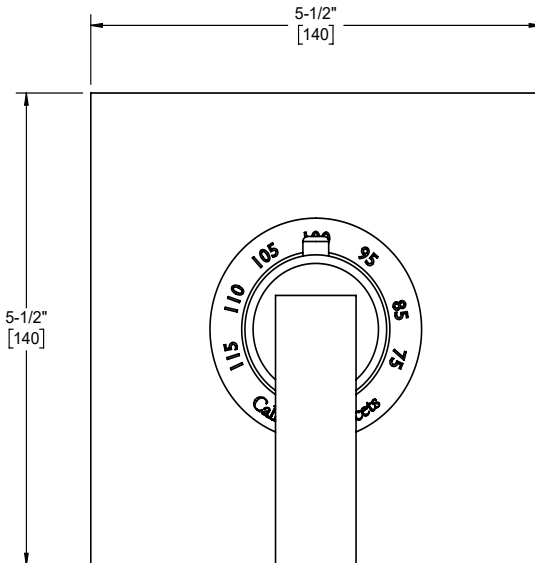

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]



**California Faucets®**

**StyleTherm®**


**3/4" Thermostatic Rough Valve**

**THT75-R**

### Features

- Forged brass valve body construction
- Max flow rate: 11.0 gpm (41.6 L/m) @ 60 psi
- Integral service stops with check valves
- Single-handle temperature mixing
- Thermostatic anti-scald protection
- Genuine Vernet® mixing cartridge featuring
  - Polymer construction limits limescale build-up
  - Integrated filter screens
  - Paraffin wax element

**NOTE:** Requires separate shut-off/volume control valve(s)



### Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.18.1-2005/CSA B125.1-05
- ASSE 1016

mudguard not shown



side view  
front view

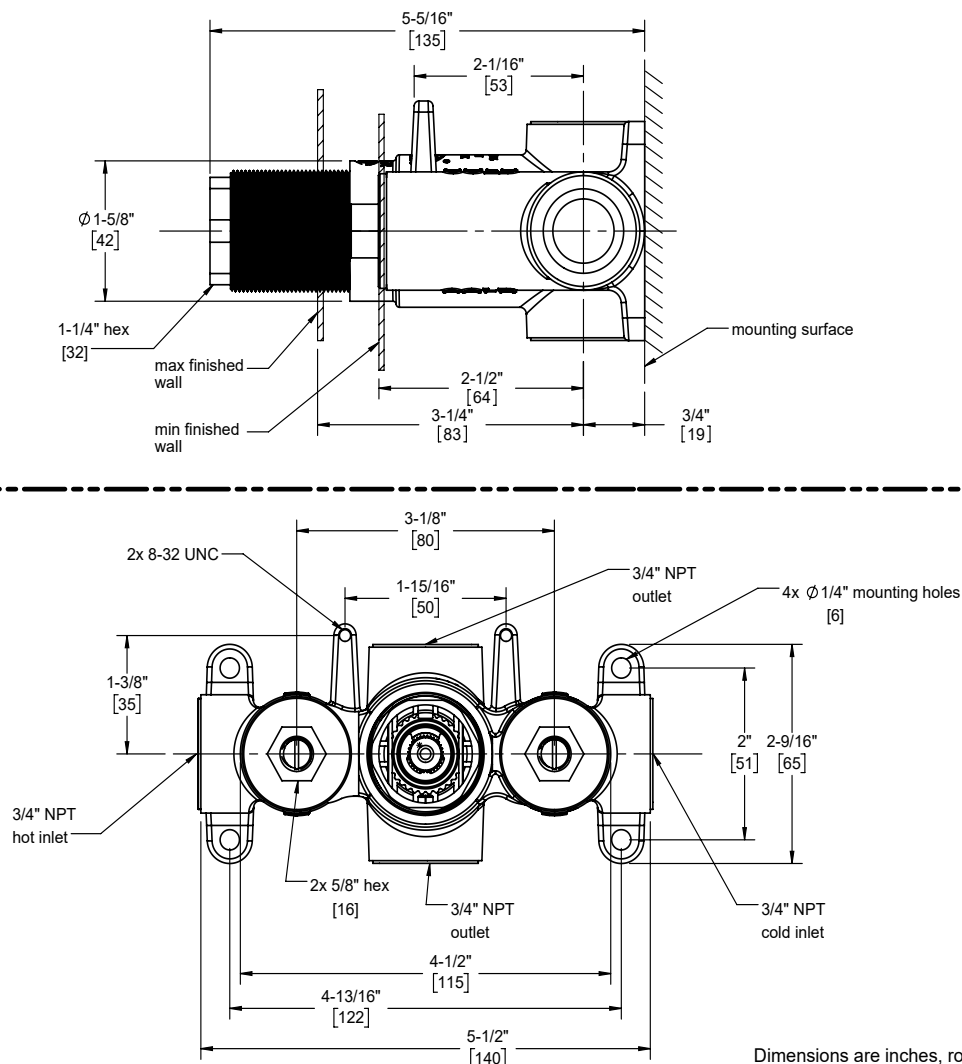

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]




# ***Morro Bay™***

**WALL OR DECK HANDLE TRIM ONLY**

**TO-77-W**



## Features

- Base dimension 2-1/4" x 2-1/4"
- Use for wall stop, wall diverter or deck diverter
- Solid brass construction
- Rough valve sold separately (50-W-R, 75-W-R, WDV-R, DDV-R)
- Over 30 finishes including 15 PVD finishes



## Codes/Standards Applicable

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1

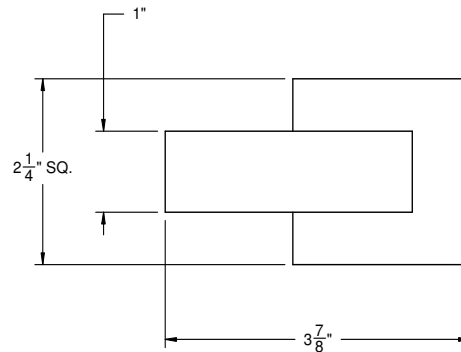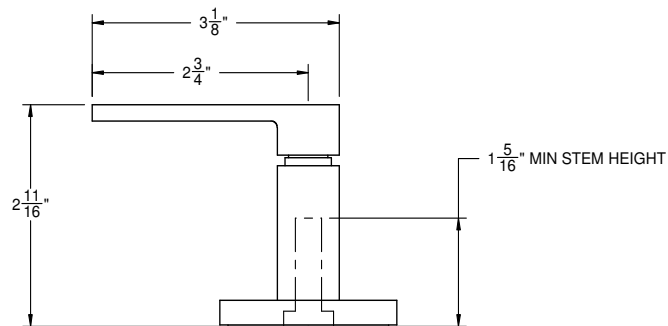

ALL DIMENSIONS SHOWN TO NEAREST 1/16"

**California Faucets®**  
800.822.8855 californi faucets.com

## 50-W-R or 75-W-R WATER FLOW

How to determine proper installation, water flow direction, of installed in-wall shut-off/volume control valve(s).

**WARNING:** Prior to removing ceramic disc cartridge from valve body all water supplies to the valve(s) must be turned off. There can be NO water flow to the valve(s).

**Photo 1** – shows arrow on side of valve to indicate proper water flow direction.


This shows how water MUST be plumbed to valve body inlet and outlet ports. If this water flow direction is NOT followed the valve MUST be reinstalled.



**Photo 2** – shows the cartridge cavity for incoming and outgoing waterways.

Two (2) arrows show where water ENTERS cavity

One (1) arrow shows water EXITS cavity

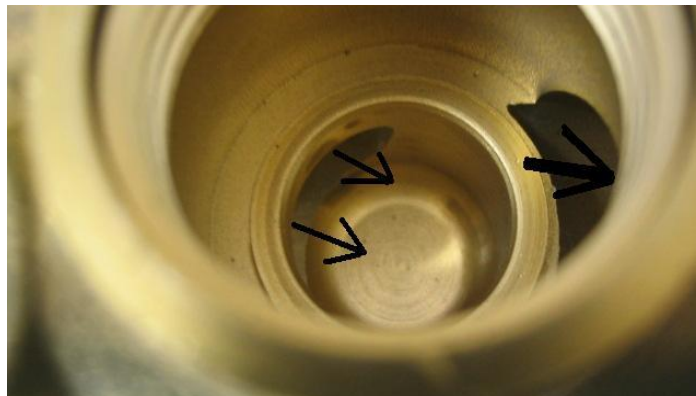


**Photo 3** – shows top view of valve body indicating water flow direction as related to body's ports and passage ways.

Inlet port is on left side of valve (as pictured) and connected to incoming water supply (e.g. therm valve)

Water enters at bottom portion of valve (1) cavity

Water exits at upper portion of valve (2) cavity


Outlet port is on right side of valve (as pictured) is connected to output device (e.g. showerhead)

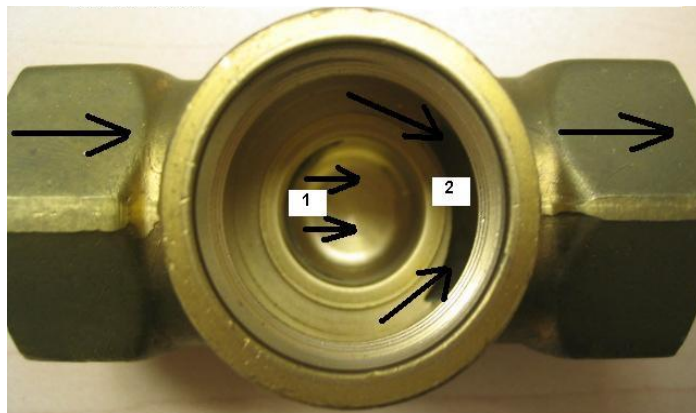

If the water flow is not correctly followed as described above, numerous problems can and will occur. The cartridge disc's will fail which may cause flooding and damage to residence. The possibility of failure increase the longer the valve is installed. Initial operation may function as intended, but as valve experiences numerous on/off cycles the water pressure will cause ceramic discs to separate, disengage from cartridge stem and/or crack. This failure is due to improper installation and IS NOT covered under warranty. It is the responsibility of the installer to properly install and verify all functions of valve(s) at the time of installation.

50-W-R\_ts\_131212

# ID Infinity Drain




## S-TIF 65 Site Sizable Series

- **S-TIF 6536 - 36" Complete Kit**
- **S-TIF 6548 - 48" Complete Kit**
- **S-TIF 6560 - 60" Complete Kit**
- **S-TIF 6572 - 72" Complete Kit**
- **S-TIF 6596 - 96" Complete Kit**

### Features

- 12 gauge, 304L stainless steel Tile Insert Frame
- Modify length and outlet location on site
- Indoor or outdoor use
- PVC Channel
- Works with 2" clamp down floor with 2" throat/strainer size *(not included)*
- **NOT INTENDED** for installation across a barrier-free threshold
- Compatible with: PVC Liner, Rubber Liner (Chloraloy®), Hot Mop, Lead Pan, Copper Pan, or Fiberglass
- Flow rate - 9 gpm per outlet
  - Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.
  - Additional outlets can be added and combined into a larger waste

### Installation

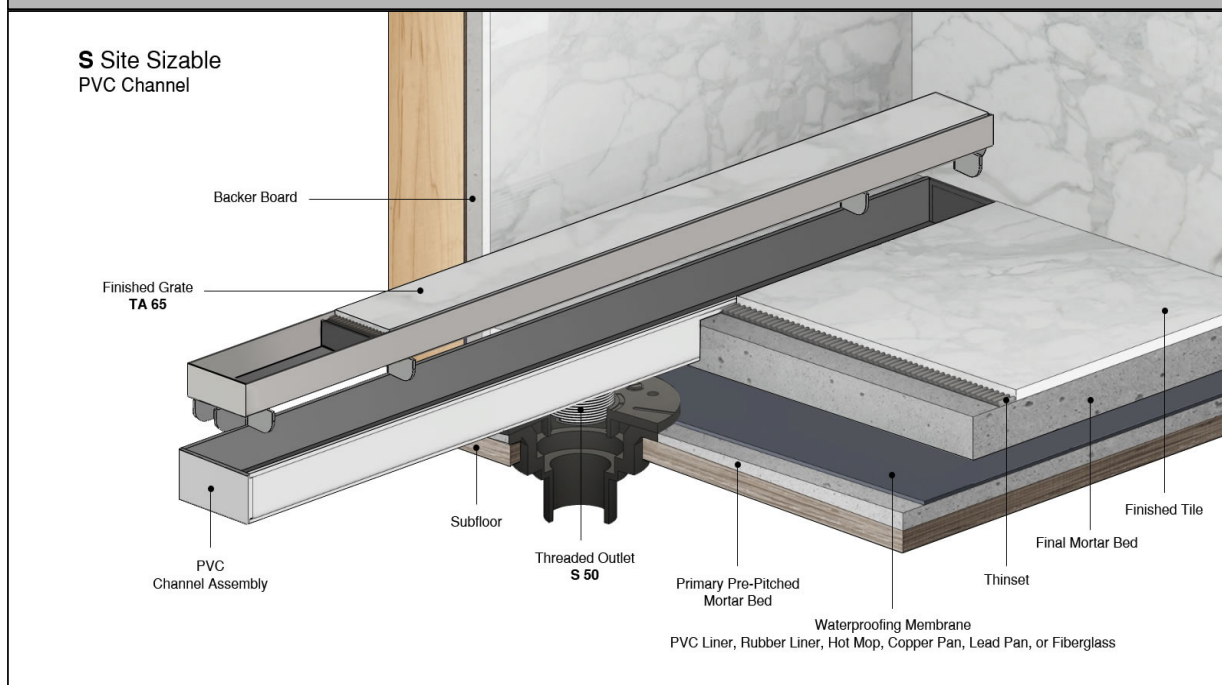

### Care & Maintenance

S-TIF 65 stainless steel linear drain top grates are made of 304L stainless steel. This material is non-porous, hygienic, rust-free and extremely durable. Bar Keepers Friend® and Soft Scrub® are commonly available products that can be used to protect and clean your Satin Stainless drain cover. For stains that have been left for an excessive amount of time, stronger cleaning agents such as Steel Brite Cleaner may be needed. For all finishes we recommend using mild soap and a soft cloth for cleaning. DO NOT use any abrasive cleaners, scrub pads or allow household cleaning agents, such as bleach, to sit on the drain cover for a long period of time. Stainless steel does not rust. External factors, such as contamination from other highly ferrous metals, built up road salt, sea salt, or chlorine may have caused "surface" rust which can be removed using Barkeepers Friend®, Soft Scrub®, or Steel Brite Cleaner. Always follow the directions on the bottle. Follow proper maintenance procedures to prevent excessive surface rust. In areas of frequent exposure to salt, chlorine, and other chemical compounds, maintenance of the stainless grates should be performed at least 2-3 times per year.

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.infinitydrain.com




NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

# ID Infinity Drain

## S-TIF 6536


## S-TIF 6548

## S-TIF 6560

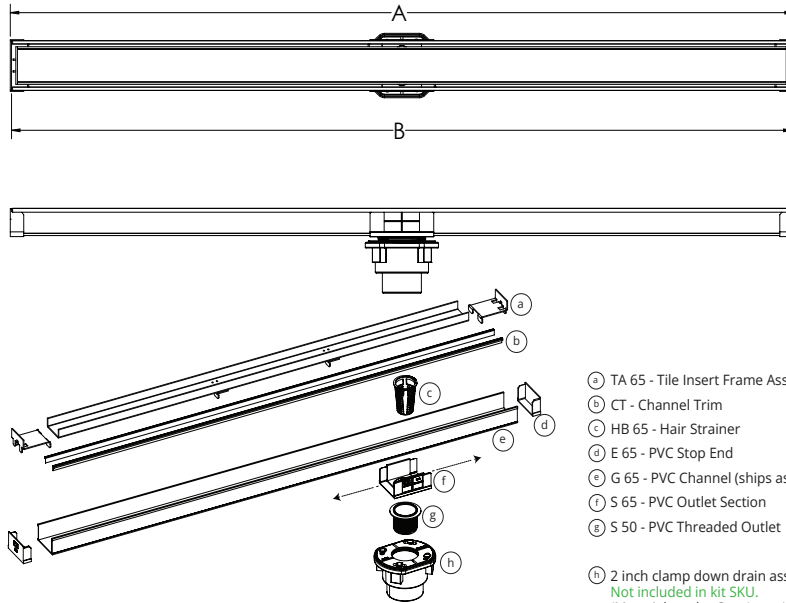

- Ⓐ TA 65 - Tile Insert Frame Assembly
- Ⓑ CT - Channel Trim
- Ⓒ HB 65 - Hair Strainer
- Ⓓ E 65 - PVC Stop End
- Ⓔ G 65 - PVC Channel (ships as one piece)
- Ⓕ S 65 - PVC Outlet Section
- Ⓖ S 50 - PVC Threaded Outlet

Ⓗ 2 inch clamp down drain assembly  
Not included in kit SKU.  
(Material can be Cast Iron, ABS, or PVC)

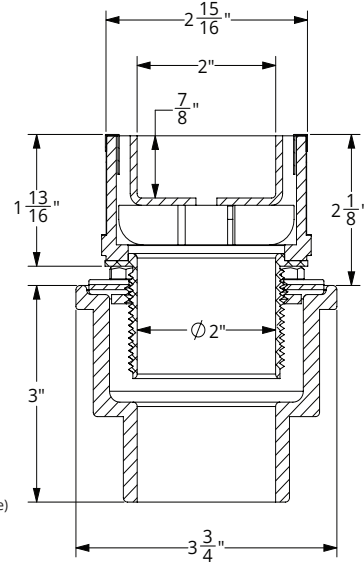

## SECTION A-A

| Model Number | Complete Kit Contents                                                                                                                                                                                                                                                       | A<br>(Maximum Overall Length) | B<br>(Maximum Grate Length) |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------|
| S-TIF 6536   | 1 - TA 6536 Tile Insert Frame<br>1 - G 6536 PVC Channel<br>1 - CS 6536 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key                            | 36"                           | 35 7/8"                     |
| S-TIF 6548   | 1 - TA 6548 Tile Insert Frame<br>1 - G 6548 PVC Channel<br>1 - CS 6548 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key<br>2 - CT 48 Channel Trims | 48"                           | 47 7/8"                     |
| S-TIF 6560   | 1 - TA 6560 Tile Insert Frame<br>1 - G 6560 PVC Channel<br>1 - CS 6560 Channel Spacer<br>2 - E 65 PVC Stop End<br>1 - S 65 PVC Outlet Section<br>1 - S 50 PVC Threaded Outlet<br>1 - HMK-65-A:<br>1 - HB 65 Hair Basket<br>1 - AKEY Lift Out Key<br>2 - CT 60 Channel Trims | 60"                           | 59 7/8"                     |

## Finishes

- ☐ Satin Stainless (SS) ☐ Polished Stainless (PS) ☐ Oil Rubbed Bronze (ORB) ☐ Satin Bronze (SB) ☐ Matte Black (BK)
- ☐ Satin Champagne (SC) ☐ Polished Gold (PG) ☐ Polished Brass (PB) ☐ Gunmetal (GM) ☐ Matte White (MW)

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.Infinitydrain.com



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

FM017-12-24



Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superceded or void data.

Page 2 of 3

# ID Infinity Drain

## S-TIF 6572

## S-TIF 6596

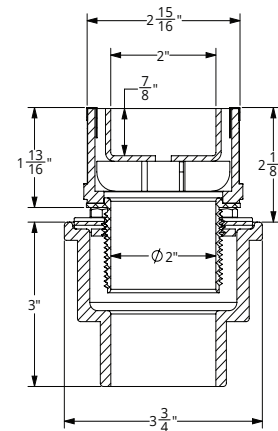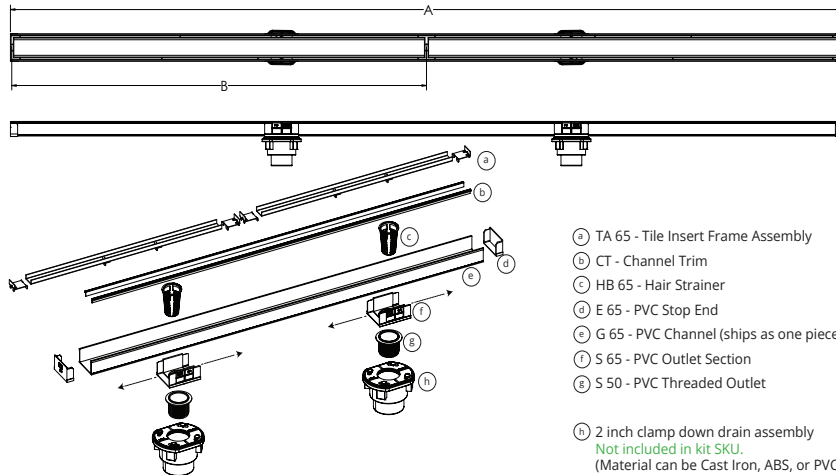

### SECTION A-A

| Model Number | Complete Kit Contents                                                                                                                                                                                                                                  | A<br>(Maximum Overall Length) | B<br>(Maximum Grate Length) |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------|
| S-TIF 6572   | 2 - TA 6536 Tile Insert Frames<br>1 - G 6536 PVC Channel<br>1 - CS 6536 Channel Spacer<br>2 - E 65 PVC Stop Ends<br>2 - S 65 PVC Outlet Sections<br>2 - S 50 PVC Threaded Outlets<br>1 - HMK-65-2A:<br>2 - HB 65 Hair Baskets<br>1 - AKEY Lift Out Key | 72"                           | 35 7/8"<br>(x 2)            |
| S-TIF 6596   | 2 - TA 6548 Tile Insert Frames<br>1 - G 6596 PVC Channel<br>2 - CS 6580 Channel Spacer<br>2 - E 65 PVC Stop Ends<br>2 - S 65 PVC Outlet Sections<br>2 - S 50 PVC Threaded Outlets<br>1 - HMK-65-2A:<br>2 - HB 65 Hair Baskets<br>1 - AKEY Lift Out Key | 96"                           | 47 7/8"<br>(x 2)            |

### Optional Components

|        |                                                                          |
|--------|--------------------------------------------------------------------------|
| F 65   | PVC Non-Threaded Outlet                                                  |
| GJC 65 | PVC Straight Joiner Strip                                                |
| GAM 65 | PVC 90° Angle Joiner                                                     |
| TNRN-P | PVC Threaded Extension Nipple                                            |
| UCP 2  | Universal 2" Clamping Plate                                              |
| UCP 4  | Universal 4" Clamping Plate                                              |
| UCP 42 | Universal Reducing Plate<br>(Adapts 4" or 3" existing throat size to 2") |

### Available components for longer lengths

|         |                       |       |                     |
|---------|-----------------------|-------|---------------------|
| TA 6536 | 36" Tile Insert Frame | E 65  | PVC Stop End        |
| TA 6548 | 48" Tile Insert Frame | S 50  | PVC Threaded Nipple |
| TA 6560 | 60" Tile Insert Frame | CT 36 | 36" Channel Trim    |
| G 6536  | 36" PVC Channel       | CT 48 | 48" Channel Trim    |
| G 6548  | 48" PVC Channel       | CT 60 | 60" Channel Trim    |
| G 6560  | 60" PVC Channel       | CT 96 | 96" Channel Trim    |
| G 6596  | 96" PVC Channel       |       |                     |
| G 6580  | 80" PVC Channel       |       |                     |
| G 65108 | 108" PVC Channel      |       |                     |

NOTE: For indoor applications and outdoor applications where exposure to users without footwear is possible Channel trim (CT) is not recommended on drains over 96" or drains with configurations that include turns. The installation of channel trim on site sizeable linear drains that fall within the outlined conditions listed are at the judgement of the installer, independent of Infinity Drain, LTD.

**Infinity Drain**  
145 Dixon Avenue  
Amityville, NY 11701  
Phone: 516.767.6786  
Fax: 516.740.3066  
www.Infinitydrain.com  
FM017-12-24



NOTE: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

Dimensions are subject to manufacturers tolerance and change without notice. We can assume no responsibility for use of superceded or void data.

Page 3 of 3