

BT0305N18 SPECIFICATIONS

Lago 71 blu•stone freestanding bathtub

FEATURES:

- Freestanding, blu•stone™ bathtub with center drain
- Streamlined, high profile one piece design
- 70 $\frac{7}{8}$ " (1800mm) L x 34 $\frac{1}{4}$ " (870mm) W x 21 $\frac{1}{4}$ " (540mm) H
- Includes integral slot overflow & matching blu•stone™ waste cover
- Made of blu•stone™ providing the look and feel of natural stone
- Stronger and more durable than acrylic
- Non-porous, stain resistant surface that does not require sealing
- Does not promote bacteria, mold or fungi
- Tailpiece not included (Blu recommends BTWaste.RN or BTWaste.CI.RN)
- Tailpiece not included

SPECIFICATIONS:

Basin Area:	47 $\frac{5}{8}$ " (1210mm) x 22 $\frac{3}{4}$ " (580mm)*
Top Area:	70 $\frac{7}{8}$ " (1800mm) x 34 $\frac{1}{4}$ " (870mm)*
To Overflow: Water	2 $\frac{1}{4}$ " (60mm)*
Depth:	19 $\frac{1}{4}$ " (490mm)*
Capacity:	100G (380L)
Slope of Backrest:	30°*
Weight:	284lbs (129KG)
Hot water supply req'd:	Should be 70% of water capacity of tub or greater
Warranty:	Five Year Warranty (Residential use) One Year Warranty (Commercial use)
Material:	blu•stone™
Shipping Weight:	364 lbs (165kg)*
Shipping Dimensions:	(LWH) 74 $\frac{3}{4}$ " x 32" x 33 $\frac{3}{4}$ " (1900mm x 810mm x 860mm)*

COLOR + FINISH:





- White Matte and Gloss finish as standard

INSTALLATION NOTES:

Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1400 lbs (635kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations

CODES / STANDARDS APPLICABLE:

Meets or exceeds ANSI / ASME standard
Z124.1.2 and CAN / CSA B 45 requirements
IAPMO / UPC / cUPC

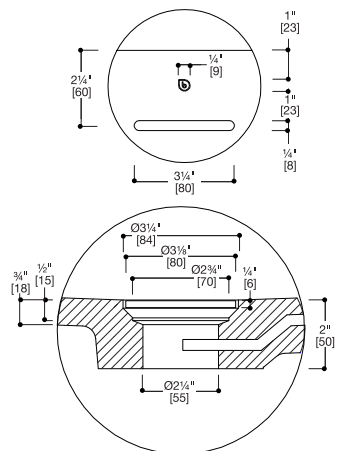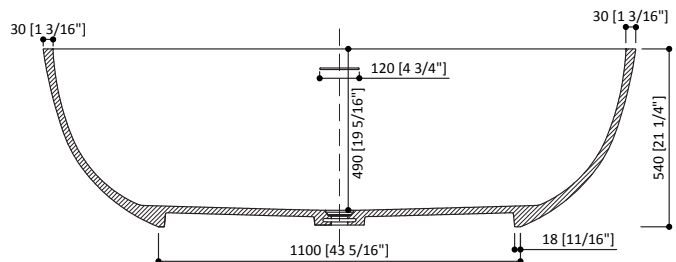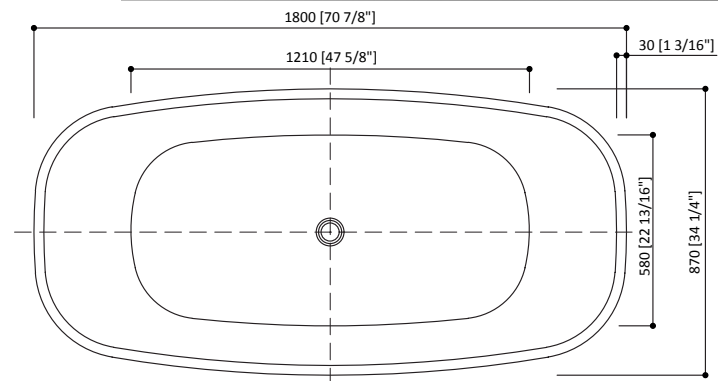

*Approximate measurements for comparison only.

Note: These dimensions and specifications are subject to change without notice.